

NEKO
THINK DESIGN

NEKO
THINK DESIGN

www.nekolighting.com

2022 COLLECTION
www.nekolighting.com

2022

NEKO
THINK DESIGN

NEKO LIGHTING AG

Kreuzstrasse 2

CH-8008 Zürich / Switzerland

+41 44 451 80 15

sales@nekolighting.com

www.nekolighting.com



2022 Collection

NEKO
THINK DESIGN
www.nekolighting.com

NEKO vereint europäisches Denken und chinesische Effizienz

Die Schweizer Firma NEKO LIGHTING bietet seit 2013 effiziente und qualitativ hochwertige LED Architekturbeleuchtung zu einem attraktiven Preis-Leistungsverhältnis. Kombiniert werden europäisches Denken und chinesische Effizienz zur gemeinsamen Firmenphilosophie „Think Design“.

Eigentümer ist Sven Speissegger (Schweiz), welcher über eine langjährige und umfangreiche Erfahrung im Beleuchtungsmarkt verfügt.

Firmensitz und Zentrale des Unternehmens sind in der Schweiz. Aktuell betreibt NEKO eine eigene Produktions- und Beschichtungsanlage in China.

In Deutschland, Frankreich, England, Nordamerika/Canada, Peking und Shanghai befinden sich im NEKO Besitz Vertriebsstützpunkte. Eigene Lagerhaltung ist in Deutschland und China vorhanden.

NEKO Leuchten werden exklusiv über ein Distributorennetz in zwischen mehr als 90 Ländern weltweit vertrieben.

Von Beginn an produzierte NEKO nachhaltige LED Leuchten. Für die Produkte setzt NEKO ausschließlich hochwertige LED-Chips namenhafter Hersteller, z. B. Osram, Samsung, Citizen ein. Die verwendeten Treiber besitzen das ENEC-Zeichen.

Jedes NEKO Produkt für den Innenbereich hat eine Garantie von 5 Jahren (NEKO Produkte für den Außenbereich haben 3 Jahre Garantie). 2019 investierte NEKO in die Produktionsanlage und in die lichttechnischen Labore in China. Die Expansion erforderte größere Räume und einen neuen Standort für die Firma.

NEKO
THINK DESIGN
www.nekolighting.com

NEKO: the union of European thinking and Chinese efficiency

NEKO: the union of European thinking and Chinese efficiency. NEKO LIGHTING provides high quality as well as efficient LED-lighting solutions at a very competitive price/performance ratio since 2013. By uniting European thinking and Chinese efficiency NEKO created its corporate philosophy “Think Design”.

NEKO is owned by Sven Speissegger (Switzerland), with a long track record and extensive know-how in the lighting market.

NEKO with its registered and head office in Switzerland owns a production facility as well as a coating plant in China.

The corporation runs with NEKO owned offices in Germany, France, Great Britain, North America/Canada, Beijing and Shanghai.

NEKO lights are exclusively sold via a distributor network in more than 90 countries worldwide.


NEKO LED-lights were sustainably produced right from the beginning and are solely fitted with premium LED-Chips by renowned manufacturers such as Osram, Samsung and Citizen. All drivers installed come with ENEC-labeling.

Each and every NEKO interior lighting product with a 5-Year Warranty (exterior lighting products with a 3-Year Warranty). In 2019 NEKO expanded due to needing larger premises and a new site and invested in its production facility and lighting laboratories in China.

NEKO
THINK DESIGN
www.nekolighting.com

INDEX

SENSE 45 Series



SENSE45-S45R1	SENSE45-S45S1
■015-016	■017-018

SENSE 68 Series



SENSE68-S68R1	SENSE68-S68S1
■019-020	■021-022


SENSE 100 Series



SENSE100-S100R1 SENSE100-S100S1 SENSE100-S100R2 SENSE100-S100S2 SENSE100-S100R3 SENSE100-S100S3

■025-026 ■027-028 ■029-030 ■031-032 ■035 ■036

SENSE 125 Series

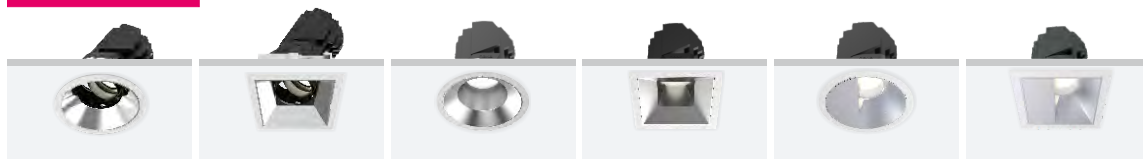

SENSE125-S125R1 SENSE125-S125S1 SENSE125-S125R2 SENSE125-S125S2 SENSE125-S125R3 SENSE125-S125S3

■039-040 ■041-042 ■043-044 ■045-046 ■047 ■048

SENSE 150 Series



SENSE150-S150R1 SENSE150-S150S1 SENSE150-S150R2 SENSE150-S150S2 SENSE150-S150R3 SENSE150-S150S3

■051-052 ■053-054 ■055-056 ■057-058 ■059 ■060

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info.]-[Accessories]

***** - * ** ** * - * * - *

SSR1 - 9 30 28 13 D - W S - H

Acronym of Model CRI CCT Beam Angle Lighting Control Fixture Color Reflector / Decoration Ring Color Accessories

Power

Color

SSR1-9302813D-WS-H

- SENSE100, Round Trim, Adjustable Version,
- CRI90, CCT3000K, Beam 28D, 13W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.

SLS3-940WW25A-WM

- SENSE150, Square Trim, Wall Washer,
- CRI90, CCT4000K, Wall Washer, 25W, 1-10V Control,
- White Trim, Matt 2nd Reflector.

TAKEO Round Series



TAKEO-T75 ■067-068	TAKEO-T100 ■069-070	TAKEO-T150 ■073-074	TAKEO-T200 ■077-078	
TAKEO Square Series				TAKEO-T150C ■081-082

TAKEO Square Series




TAKEO-TS68
■083-084

TAKEO-TS100
■085

TAKEO-TS150
■086

TAKEO-TS200
■087

MR16 Replacement



M3
■095-096

M4
■097-098

CLUB Trim Series for MR16 Replacement




TA5 TA6 TA7 TA8 TA9



TSA1 TSA2 TSA3 TSA1D TSA2D TSA3D

SKYJACK Series **NEW**

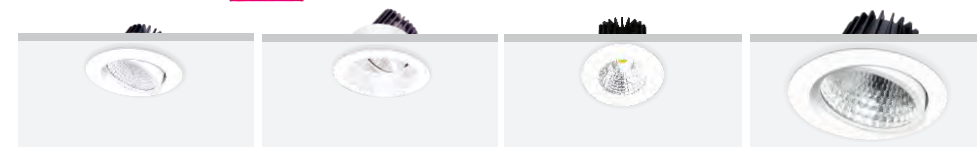

SKYJACK A68 ■ 129-130 SKYJACK D ■ 131-132 SKYJACK F ■ 133 SKYJACK A145 ■ 135

SLIM 40 Series 

SLIM 40-F SLIM 40-A

■139 ■140

SIGN Series



SIGN35-G
■ 145

SIGN45-G
■ 146

KENZO Series



K1X30
■ 149

K1X55
■ 150

K1X70
■ 151-152

FUSION Fixed



FUSION-FF1
■ 161

FUSION-FF2
■ 163


FUSION-FF2
■ 165

FUSION-FX4
■ 167

FUSION-FF5
■ 169

FUSION-FF10
■ 171

FUSION Fixed Trimless

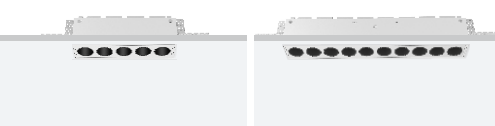

FUSION-FFT5
■ 173

FUSION-FFT10
■ 174

FUSION Adjustable



FUSION-FA5
■ 175

FUSION-FA10
■ 177

FUSION Wall Washer



FUSION-FW5
■ 179

FUSION-FW10
■ 181

FUSION General Light



FUSION-FG5
■ 183

FUSION-FG10
■ 184

FUSION Adjustable Spotlight



FUSION-FS1
■ 189

FUSION-FS2
■ 190

FUSION-FS3
■ 191


FUSION-FS6
■ 192



FUSION-FF3-FS1
■ 193

FUSION-FF6-FS2
■ 194

FUSION Linear System

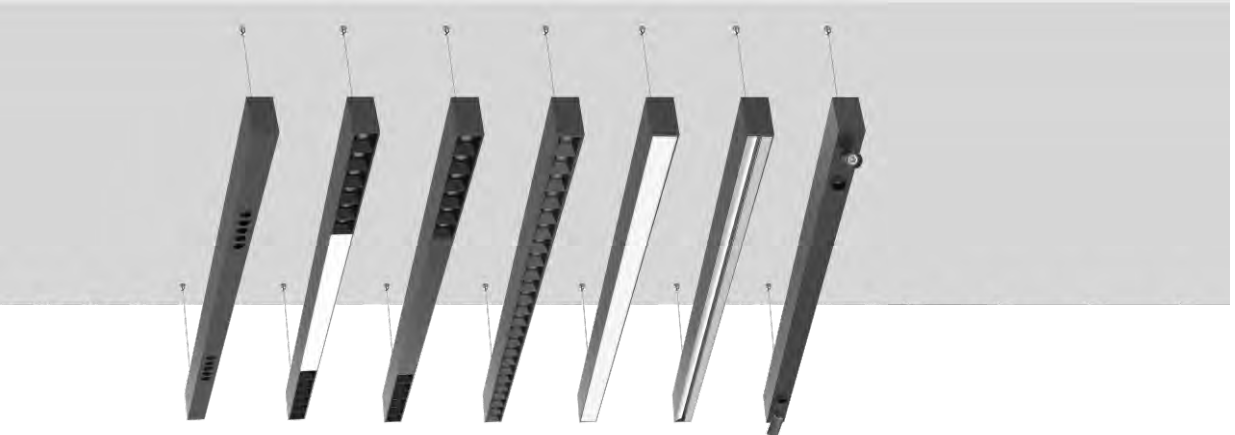

FUSION Linear System
■ 195-230

MODULINE 26 Linear System

! NEW



MODULINE 26 Linear System
■ 231-276

GAME Ceiling Light Series



GAME
■ 277-296

SUGAR Ceiling Light Series



SUGAR
■ 297-212

GINGER & PEPPER Series **! NEW**




GINGER 400
■ 315-316

GINGER 600
■ 317

PEPPER 400
■ 319-230

SKY Family Ceiling Light **! NEW**

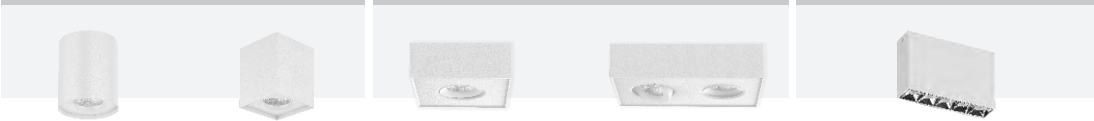

SKYDRIVER SDR
■ 323

SKYDRIVER SDSC
■ 324

SKYJOY Single SJSC
■ 325-326

SKYJOY Double SJDC
■ 327-328

SKYLINE SL5C
■ 329

MIU Series



MIU-C M
■ 333-334

MIU-C L
■ 335-336

MIU-P S
■ 339-340

MIU-P M
■ 341-342

MIU-P L
■ 343-344

BREEZE Series **! NEW**




BREEZE Single
■ 348

BREEZE Double
■ 349

BREEZE Triple
■ 350

Ceiling Mounted PURE Series



PURE Art-C
■ 353

PURE S-C
■ 354

PURE Series Tracklight



PURE ART
■ 359

PURE S
■ 361-362

PURE M
■ 363-364

ROXY Series Tracklight



ROXY ART
■ 367-368

ROXY S
■ 369-370

ROXY K
■ 371-372

Zooming
ROXY Art-Z
■ 375

Zooming
ROXY S-Z
■ 376


INLINE Series **! NEW**



INLINE ST
■ 381

INLINE SP
■ 382

KOI Series **! NEW**

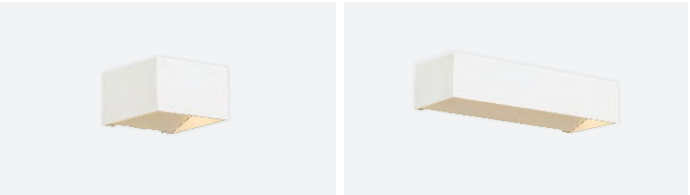

Small KOI
■ 387-388

Large KOI
■ 389

SEAPOINT Series



SEAPOINT
■ 393

CARMEL Series

! NEW



SKYSURFER SSRC
■ 395



CARMEL Round
■ 397



CARMEL Square
■ 397

CLIFTON Series



CLIFTON
■ 399

CAMPSBAY Series



CAMPSBAY Single
■ 401



CAMPSBAY Double
■ 401

LAGOON Series



LAGOON
■ 403

BAY Series



BAY
■ 405

ASCONA Series



ASCONA
■ 407

St.Tropez Series



St.Tropez
■ 409

Capetown-Recessed Series



Capetown Round-Recessed
■ 411



Capetown Square-Recessed
■ 411

Capetown-Surface Series



Capetown Round-Surface
■ 413



Capetown Square-Surface
■ 413

CALIFORNIA Series



CALIFORNIA 12
■ 415



CALIFORNIA 16
■ 415

DURBAN Series



DURBAN
■ 417

TERARACE Series



TERARACE Micro
■ 419



TERARACE Nano
■ 420



TERARACE Mini
■ 421



TERARACE Maxi
■ 422

AFTER7 Series



AFTER7 Mini
■ 423



AFTER7 Maxi
■ 424

PORTOFINO Series



PORTOFINO S
■ 425-426



PORTOFINO M
■ 425-426



PORTOFINO L
■ 425-426




PORTOFINO Adjustable
■ 427










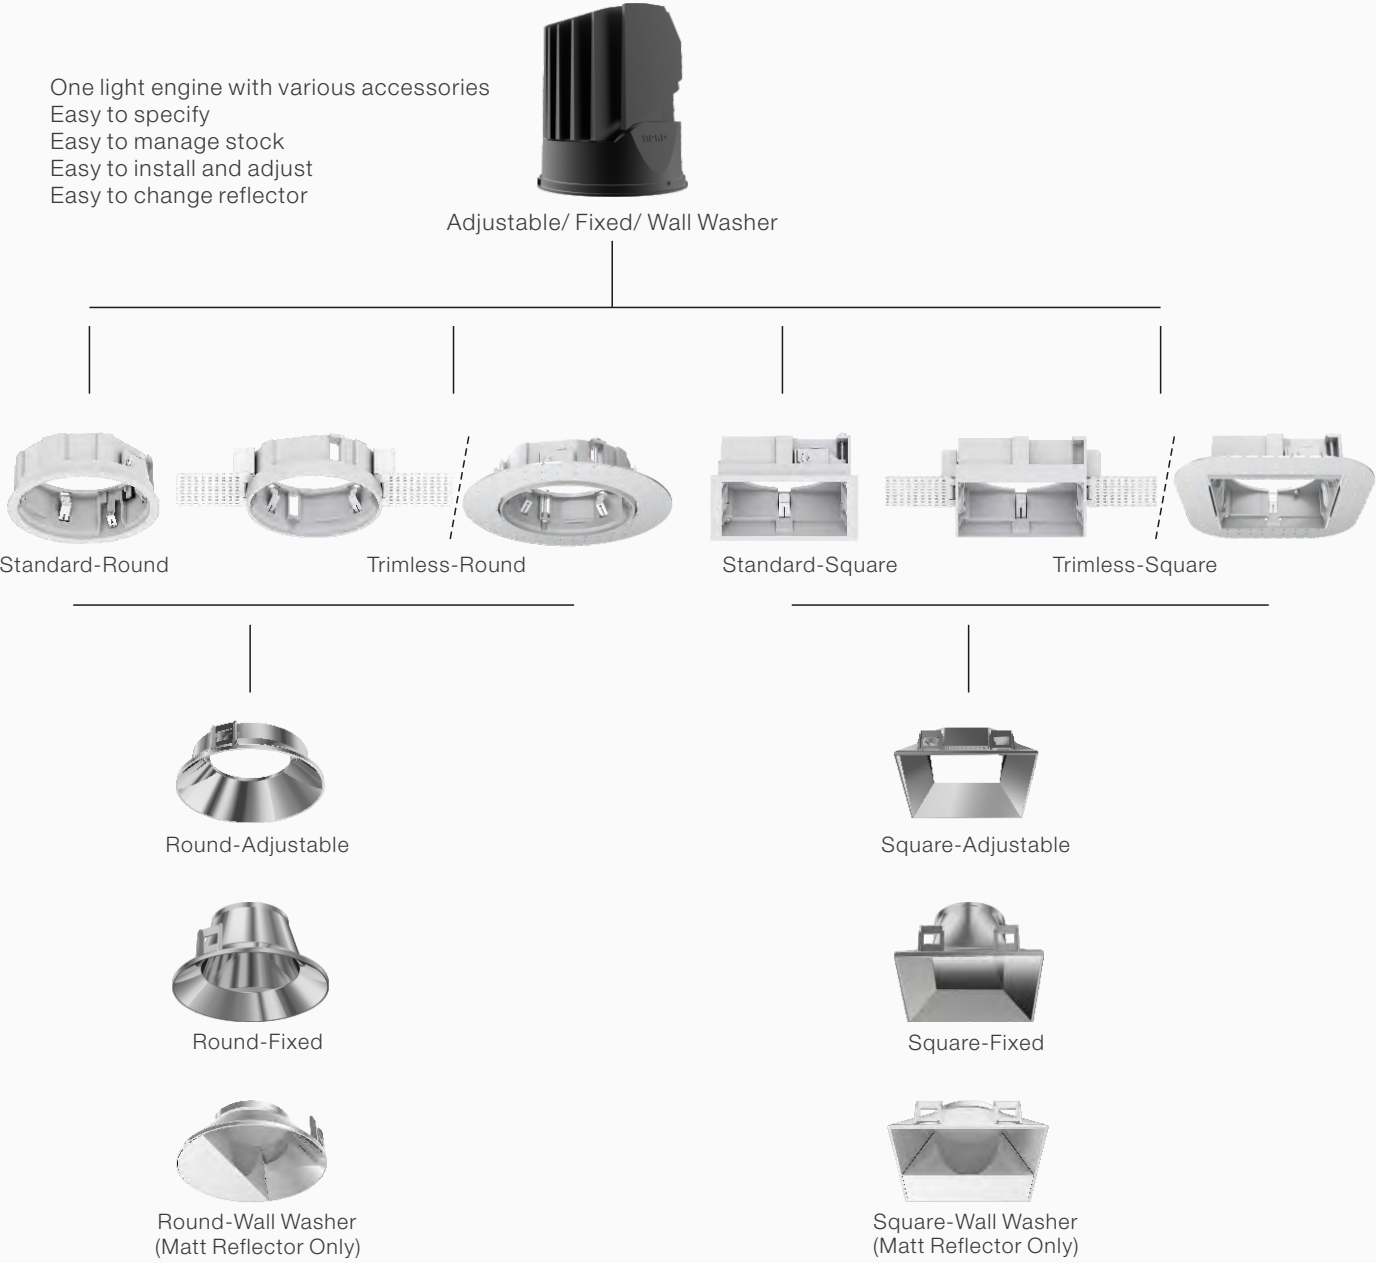












Secondary Reflector

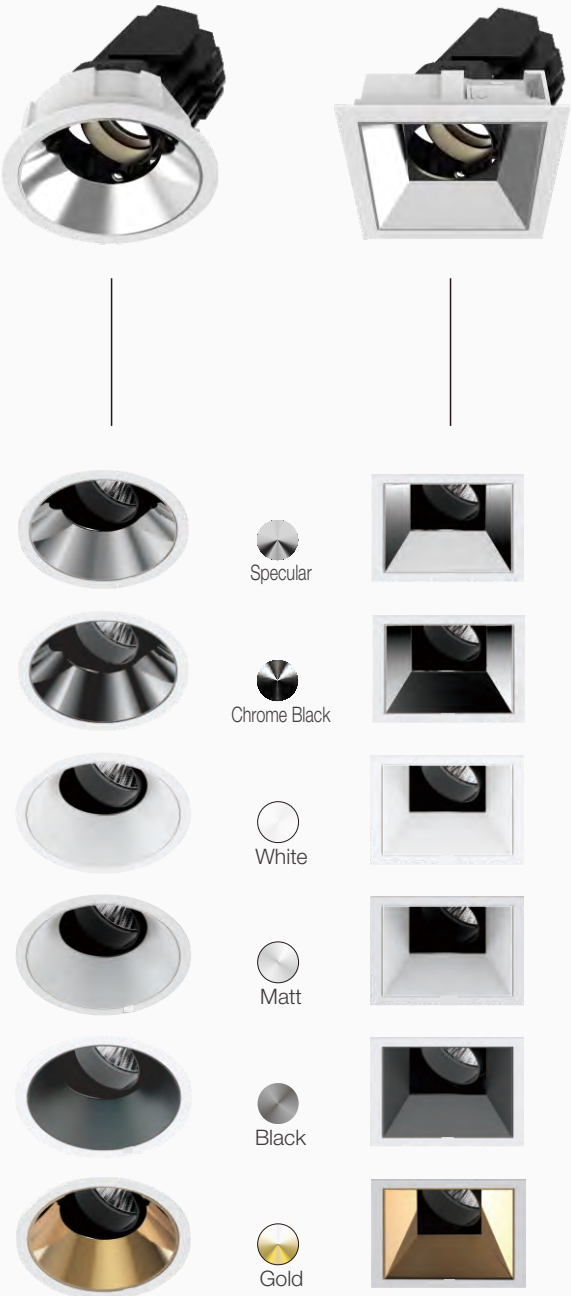

SENSE

LED DOWNLIGHT SYSTEM









Adjustable

Model No.	S45R1	S68R1	S100R1	S125R1	S150R1	S45S1	S68S1	S100S1	S125S1	S150S1
Product Photo										
Dimension (mm)										
Cutout (mm)										
Wattage	4W	8.5W/ 7.5W/ 11W	13W	18W	25W	4W	8.5W/ 7.5W/ 11W	13W	18W	25W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	18°/ 24°/ 35°/ 50°	10°/ 24°/ 40°/ 55°	20°/ 40°/ 50°	20°/ 40°/ 50°	20°/ 35°/ 50°	18°/ 24°/ 35°/ 50°	10°/ 24°/ 40°/ 55°	20°/ 40°/ 50°	20°/ 40°/ 50°	20°/ 35°/ 50°
Lumen Output	350lm @CRI90 3000K	800lm @CRI90 3000K	850lm @CRI90 3000K	1300lm @CRI90 3000K	1800lm @CRI90 3000K	350lm @CRI90 3000K	800lm @CRI90 3000K	850lm @CRI90 3000K	1300lm @CRI90 3000K	1800lm @CRI90 3000K
IP	IP20					IP20				
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim					On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				
Accessory	 honeycomb					 honeycomb				
Trimless Version	Not Available					Not Available				
Reflector Color	 Matt  White  Black	 Specular  Chrome Black  Matt  White  Black  Gold				 Matt  White  Black	 Specular  Chrome Black  Matt  White  Black  Gold			
Trim Color	Standard: White Available: Black/ Customized					Standard: White Available: Black/ Customized				
										









SENSE

LED DOWNLIGHT SYSTEM

Fixed

Model No.	S100R2	S125R2	S150R2	S100S2	S125S2	S150S2
Product Photo						
Dimension (mm)						
Cutout (mm)						
Wattage	13W	18W	25W	13W	18W	25W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>90	>90	>90	>90	>90	>90
Beam Angle	28°/ 35°/ 50°	28°/ 40°/ 50°	28°/ 32°/ 50°	28°/ 35°/ 50°	28°/ 40°/ 50°	28°/ 32°/ 50°
Lumen Output	900lm @CRI90 3000K	1400lm @CRI90 3000K	1900lm @CRI90 3000K	900lm @CRI90 3000K	1400lm @CRI90 3000K	1900lm @CRI90 3000K
IP	IP20					
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim					
Accessory						
Trimless Version						
Reflector Color						
Trim Color	Standard: White Available: Black/ Customized 					

Wall Washer

Model No.	S100R3	S125R3	S150R3	S100S3	S125S3	S150S3
Product Photo						
Dimension (mm)						
Cutout (mm)						
Wattage	13W	18W	25W	13W	18W	25W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>90	>90	>90	>90	>90	>90
Beam Angle	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer
Lumen Output	480lm @CRI90 3000K	680lm @CRI90 3000K	1000lm @CRI90 3000K	480lm @CRI90 3000K	680lm @CRI90 3000K	1000lm @CRI90 3000K
IP	IP20					
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim					
Accessory						
Trimless Version						
Reflector Color						
Trim Color	Standard: White Available: Black/ Customized 					

NEKO / SENSE 45 / S45R1
Adjustable LED Downlight

4W

CRI90

2700K
3000K
4000K

18°
24°
35°
50°

CREE

50,000h@L80B10

UGR

< 19

IP 20

5

GUARANTEED

CB

CE

Intertek

45°

1-20mm
Ceiling Thickness

60

30°

35.5

Ø55

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Matt Reflector	4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM	
							24°	480lm	330lm	SUR1-9272404N-WM	
							35°	480lm	330lm	SUR1-9273504N-WM	
							50°	480lm	330lm	SUR1-9275004N-WM	
						3000K	18°	500lm	350lm	SUR1-9301804N-WM	
							24°	500lm	350lm	SUR1-9302404N-WM	
							35°	500lm	350lm	SUR1-9303504N-WM	
							50°	500lm	350lm	SUR1-9305004N-WM	
						4000K	18°	550lm	380lm	SUR1-9401804N-WM	
							24°	550lm	380lm	SUR1-9402404N-WM	
							35°	550lm	380lm	SUR1-9403504N-WM	
							50°	550lm	380lm	SUR1-9405004N-WM	
 White Reflector	4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WW	
							24°	480lm	330lm	SUR1-9272404N-WW	
							35°	480lm	330lm	SUR1-9273504N-WW	
							50°	480lm	330lm	SUR1-9275004N-WW	
						3000K	18°	500lm	350lm	SUR1-9301804N-WW	
							24°	500lm	350lm	SUR1-9302404N-WW	
							35°	500lm	350lm	SUR1-9303504N-WW	
							50°	500lm	350lm	SUR1-9305004N-WW	
						4000K	18°	550lm	380lm	SUR1-9401804N-WW	
							24°	550lm	380lm	SUR1-9402404N-WW	
							35°	550lm	380lm	SUR1-9403504N-WW	
							50°	550lm	380lm	SUR1-9405004N-WW	
 Black Reflector	4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WB	
							24°	480lm	330lm	SUR1-9272404N-WB	
							35°	480lm	330lm	SUR1-9273504N-WB	
							50°	480lm	330lm	SUR1-9275004N-WB	
						3000K	18°	500lm	350lm	SUR1-9301804N-WB	
							24°	500lm	350lm	SUR1-9302404N-WB	
							35°	500lm	350lm	SUR1-9303504N-WB	
							50°	500lm	350lm	SUR1-9305004N-WB	
						4000K	18°	550lm	380lm	SUR1-9401804N-WB	
							24°	550lm	380lm	SUR1-9402404N-WB	
							35°	550lm	380lm	SUR1-9403504N-WB	
							50°	550lm	380lm	SUR1-9405004N-WB	

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SUR1-9302404N-WM with Honeycomb
SUR1-9302404N-WM-H

Ultra Tiny



NEKO / SENSE 45 / S45S1
Adjustable LED Downlight



4W

CRI90

2700K
3000K
4000K

18°
24°
35°
50°

CREE
50,000h@L80B10

UGR
< 19

IP 20

5 YEAR
GUARANTEE

CB

CE

Intertek

45x45

1-20mm
Ceiling Thickness

60

30°
35°
55x55



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9273504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9301804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WW
						24°	480lm	330lm	SUS1-9272404N-WW
						35°	480lm	330lm	SUS1-9273504N-WW
						50°	480lm	330lm	SUS1-9275004N-WW
					3000K	18°	500lm	350lm	SUS1-9301804N-WW
						24°	500lm	350lm	SUS1-9302404N-WW
						35°	500lm	350lm	SUS1-9303504N-WW
						50°	500lm	350lm	SUS1-9305004N-WW
					4000K	18°	550lm	380lm	SUS1-9401804N-WW
						24°	550lm	380lm	SUS1-9402404N-WW
						35°	550lm	380lm	SUS1-9403504N-WW
						50°	550lm	380lm	SUS1-9405004N-WW
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WB
						24°	480lm	330lm	SUS1-9272404N-WB
						35°	480lm	330lm	SUS1-9273504N-WB
						50°	480lm	330lm	SUS1-9275004N-WB
					3000K	18°	500lm	350lm	SUS1-9301804N-WB
						24°	500lm	350lm	SUS1-9302404N-WB
						35°	500lm	350lm	SUS1-9303504N-WB
						50°	500lm	350lm	SUS1-9305004N-WB
					4000K	18°	550lm	380lm	SUS1-9401804N-WB
						24°	550lm	380lm	SUS1-9402404N-WB
						35°	550lm	380lm	SUS1-9403504N-WB
						50°	550lm	380lm	SUS1-9405004N-WB

Optional accessory

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Code for SUS1-9302404N-WM with Honeycomb
SUS1-9302404N-WM-H

Ultra Tiny



NEKO / SENSE 68 / S68R1
Adjustable LED Downlight



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WS
						40°	850lm	570lm	STR1-9274008N-WS
						55°	850lm	480lm	STR1-9275508N-WS
					3000K	24°	900lm	600lm	STR1-9302408N-WS
						40°	900lm	600lm	STR1-9304008N-WS
						55°	900lm	500lm	STR1-9305508N-WS
					4000K	24°	1000lm	650lm	STR1-9402408N-WS
						40°	1000lm	650lm	STR1-9404008N-WS
						55°	1000lm	550lm	STR1-9405508N-WS
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WS
						40°	1100lm	770lm	STR2-9274011N-WS
						55°	1100lm	630lm	STR2-9275511N-WS
					3000K	24°	1200lm	800lm	STR2-9302411N-WS
						40°	1200lm	800lm	STR2-9304011N-WS
						55°	1200lm	650lm	STR2-9305511N-WS
					4000K	24°	1300lm	850lm	STR2-9402411N-WS
						40°	1300lm	850lm	STR2-9404011N-WS
						55°	1300lm	700lm	STR2-9405511N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WM
						40°	850lm	570lm	STR1-9274008N-WM
						55°	850lm	480lm	STR1-9275508N-WM
					3000K	24°	900lm	600lm	STR1-9302408N-WM
						40°	900lm	600lm	STR1-9304008N-WM
						55°	900lm	500lm	STR1-9305508N-WM
					4000K	24°	1000lm	650lm	STR1-9402408N-WM
						40°	1000lm	650lm	STR1-9404008N-WM
						55°	1000lm	550lm	STR1-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WM
						40°	1100lm	770lm	STR2-9274011N-WM
						55°	1100lm	630lm	STR2-9275511N-WM
					3000K	24°	1200lm	800lm	STR2-9302411N-WM
						40°	1200lm	800lm	STR2-9304011N-WM
						55°	1200lm	650lm	STR2-9305511N-WM
					4000K	24°	1300lm	850lm	STR2-9402411N-WM
						40°	1300lm	850lm	STR2-9404011N-WM
						55°	1300lm	700lm	STR2-9405511N-WM

Optional accessory



Code for STR1-9302408N-WM with Honeycomb
STR1-9302408N-WM-**H**



Black Reflector



Chrome Black Reflector



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WB
						40°	850lm	570lm	STR1-9274008N-WB
						55°	850lm	480lm	STR1-9275508N-WB
					3000K	24°	900lm	600lm	STR1-9302408N-WB
						40°	900lm	600lm	STR1-9304008N-WB
						55°	900lm	500lm	STR1-9305508N-WB
					4000K	24°	1000lm	650lm	STR1-9402408N-WB
						40°	1000lm	650lm	STR1-9404008N-WB
						55°	1000lm	550lm	STR1-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WB
						40°	1100lm	770lm	STR2-9274011N-WB
						55°	1100lm	630lm	STR2-9275511N-WB
					3000K	24°	1200lm	800lm	STR2-9302411N-WB
						40°	1200lm	800lm	STR2-9304011N-WB
						55°	1200lm	650lm	STR2-9305511N-WB
					4000K	24°	1300lm	850lm	STR2-9402411N-WB
						40°	1300lm	850lm	STR2-9404011N-WB
						55°	1300lm	700lm	STR2-9405511N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WC
						40°	850lm	570lm	STR1-9274008N-WC
						55°	850lm	480lm	STR1-9275508N-WC
					3000K	24°	900lm	600lm	STR1-9302408N-WC
						40°	900lm	600lm	STR1-9304008N-WC
						55°	900lm	500lm	STR1-9305508N-WC
					4000K	24°	1000lm	650lm	STR1-9402408N-WC
						40°	1000lm	650lm	STR1-9404008N-WC
						55°	1000lm	550lm	STR1-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WC
						40°	1100lm	770lm	STR2-9274011N-WC
						55°	1100lm	630lm	STR2-9275511N-WC
					3000K	24°	1200lm	800lm	STR2-9302411N-WC
						40°	1200lm	800lm	STR2-9304011N-WC
						55°	1200lm	650lm	STR2-9305511N-WC
					4000K	24°	1300lm	850lm	STR2-9402411N-WC
						40°	1300lm	850lm	STR2-9404011N-WC
						55°	1300lm	700lm	STR2-9405511N-WC

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WW
						40°	850lm	570lm	STR1-9274008N-WW
						55°	850lm	480lm	STR1-9275508N-WW
					3000K	24°	900lm	600lm	STR1-9302408N-WW
						40°	900lm	600lm	STR1-9304008N-WW
						55°	900lm	500lm	STR1-9305508N-WW
					4000K	24°	1000lm	650lm	STR1-9402408N-WW
						40°	1000lm	650lm	STR1-9404008N-WW
						55°	1000lm	550lm	STR1-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WW
						40°	1100lm	770lm	STR2-9274011N-WW
						55°	1100lm	630lm	STR2-9275511N-WW
					3000K	24°	1200lm	800lm	STR2-9302411N-WW
						40°	1200lm	800lm	STR2-9304011N-WW
						55°	1200lm	650lm	STR2-9305511N-WW
					4000K	24°	1300lm	850lm	STR2-9402411N-WW
						40°	1300lm	850lm	STR2-9404011N-WW
						55°	1300lm	700lm	STR2-9405511N-WW


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STR1-9272408N-WG
						40°	850lm	570lm	STR1-9274008N-WG
						55°	850lm	480lm	STR1-9275508N-WG
					3000K	24°	900lm	600lm	STR1-9302408N-WG
						40°	900lm	600lm	STR1-9304008N-WG
						55°	900lm	500lm	STR1-9305508N-WG
					4000K	24°	1000lm	650lm	STR1-9402408N-WG
						40°	1000lm	650lm	STR1-9404008N-WG
						55°	1000lm	550lm	STR1-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STR2-9272411N-WG
						40°	1100lm	770lm	STR2-9274011N-WG
						55°	1100lm	630lm	STR2-9275511N-WG
					3000K	24°	1200lm	800lm	STR2-9302411N-WG
						40°	1200lm	800lm	STR2-9304011N-WG
						55°	1200lm	650lm	STR2-9305511N-WG
					4000K	24°	1300lm	850lm	STR2-9402411N-WG
						40°	1300lm	850lm	STR2-9404011N-WG
						55°	1300lm	700lm	STR2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for STR1-9302408N-WM → STR**3**-9302408N-WM
STR2-9302411N-WM → STR**4**-9302411N-WM



Trimless code for STR1-9302408N-WM → ETR**1**-9302408N-WM
STR2-9302411N-WM → ETR**2**-9302411N-WM



NEKO / SENSE 68 / **S68S1**
Adjustable LED Downlight



7.5W
11W CRI90
8.5W

2700K
3000K
4000K

24°
40°
55°
10°

CITIZEN
LED CHIPS
50,000h@L80B10

UGR < 19

IP 20


5 YEAR WARRANTY

CB

CE

RoHS

Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WS
						40°	850lm	570lm	STS1-9274008N-WS
						55°	850lm	480lm	STS1-9275508N-WS
					3000K	24°	900lm	600lm	STS1-9302408N-WS
						40°	900lm	600lm	STS1-9304008N-WS
						55°	900lm	500lm	STS1-9305508N-WS
					4000K	24°	1000lm	650lm	STS1-9402408N-WS
						40°	1000lm	650lm	STS1-9404008N-WS
						55°	1000lm	550lm	STS1-9405508N-WS
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WS
						40°	1100lm	770lm	STS2-9274011N-WS
						55°	1100lm	630lm	STS2-9275511N-WS
					3000K	24°	1200lm	800lm	STS2-9302411N-WS
						40°	1200lm	800lm	STS2-9304011N-WS
						55°	1200lm	650lm	STS2-9305511N-WS
					4000K	24°	1300lm	850lm	STS2-9402411N-WS
						40°	1300lm	850lm	STS2-9404011N-WS
						55°	1300lm	700lm	STS2-9405511N-WS
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WM
						40°	850lm	570lm	STS1-9274008N-WM
						55°	850lm	480lm	STS1-9275508N-WM
					3000K	24°	900lm	600lm	STS1-9302408N-WM
						40°	900lm	600lm	STS1-9304008N-WM
						55°	900lm	500lm	STS1-9305508N-WM
					4000K	24°	1000lm	650lm	STS1-9402408N-WM
						40°	1000lm	650lm	STS1-9404008N-WM
						55°	1000lm	550lm	STS1-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WM
						40°	1100lm	770lm	STS2-9274011N-WM
						55°	1100lm	630lm	STS2-9275511N-WM
					3000K	24°	1200lm	800lm	STS2-9302411N-WM
						40°	1200lm	800lm	STS2-9304011N-WM
						55°	1200lm	650lm	STS2-9305511N-WM
					4000K	24°	1300lm	850lm	STS2-9402411N-WM
						40°	1300lm	850lm	STS2-9404011N-WM
						55°	1300lm	700lm	STS2-9405511N-WM

Optional accessory



Code for STS1-9302408N-WM with Honeycomb
STS1-9302408N-WM-H



Black Reflector



Chrome Black Reflector



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WB
						40°	850lm	570lm	STS1-9274008N-WB
						55°	850lm	480lm	STS1-9275508N-WB
					3000K	24°	900lm	600lm	STS1-9302408N-WB
						40°	900lm	600lm	STS1-9304008N-WB
						55°	900lm	500lm	STS1-9305508N-WB
					4000K	24°	1000lm	650lm	STS1-9402408N-WB
						40°	1000lm	650lm	STS1-9404008N-WB
						55°	1000lm	550lm	STS1-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WB
						40°	1100lm	770lm	STS2-9274011N-WB
						55°	1100lm	630lm	STS2-9275511N-WB
					3000K	24°	1200lm	800lm	STS2-9302411N-WB
						40°	1200lm	800lm	STS2-9304011N-WB
						55°	1200lm	650lm	STS2-9305511N-WB
					4000K	24°	1300lm	850lm	STS2-9402411N-WB
						40°	1300lm	850lm	STS2-9404011N-WB
						55°	1300lm	700lm	STS2-9405511N-WB
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WC
						40°	850lm	570lm	STS1-9274008N-WC
						55°	850lm	480lm	STS1-9275508N-WC
					3000K	24°	900lm	600lm	STS1-9302408N-WC
						40°	900lm	600lm	STS1-9304008N-WC
						55°	900lm	500lm	STS1-9305508N-WC
					4000K	24°	1000lm	650lm	STS1-9402408N-WC
						40°	1000lm	650lm	STS1-9404008N-WC
						55°	1000lm	550lm	STS1-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WC
						40°	1100lm	770lm	STS2-9274011N-WC
						55°	1100lm	630lm	STS2-9275511N-WC
					3000K	24°	1200lm	800lm	STS2-9302411N-WC
						40°	1200lm	800lm	STS2-9304011N-WC
						55°	1200lm	650lm	STS2-9305511N-WC
					4000K	24°	1300lm	850lm	STS2-9402411N-WC
						40°	1300lm	850lm	STS2-9404011N-WC
						55°	1300lm	700lm	STS2-9405511N-WC
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WW
						40°	850lm	570lm	STS1-9274008N-WW
						55°	850lm	480lm	STS1-9275508N-WW
					3000K	24°	900lm	600lm	STS1-9302408N-WW
						40°	900lm	600lm	STS1-9304008N-WW
						55°	900lm	500lm	STS1-9305508N-WW
					4000K	24°	1000lm	650lm	STS1-9402408N-WW
						40°	1000lm	650lm	STS1-9404008N-WW
						55°	1000lm	550lm	STS1-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WW
						40°	1100lm	770lm	STS2-9274011N-WW
						55°	1100lm	630lm	STS2-9275511N-WW
					3000K	24°	1200lm	800lm	STS2-9302411N-WW
						40°	1200lm	800lm	STS2-9304011N-WW
						55°	1200lm	650lm	STS2-9305511N-WW
					4000K	24°	1300lm	850lm	STS2-9402411N-WW
						40°	1300lm	850lm	STS2-9404011N-WW
						55°	1300lm	700lm	STS2-9405511N-WW
7.5 W	9 W	31 V	250 mA	90	2700K	24°	850lm	570lm	STS1-9272408N-WG
						40°	850lm	570lm	STS1-9274008N-WG
						55°	850lm	480lm	STS1-9275508N-WG
					3000K	24°	900lm	600lm	STS1-9302408N-WG
						40°	900lm	600lm	STS1-9304008N-WG
						55°	900lm	500lm	STS1-9305508N-WG
					4000K	24°	1000lm	650lm	STS1-9402408N-WG
						40°	1000lm	650lm	STS1-9404008N-WG
						55°	1000lm	550lm	STS1-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	24°	1100lm	770lm	STS2-9272411N-WG
						40°	1100lm	770lm	STS2-9274011N-WG
						55°	1100lm	630lm	STS2-9275511N-WG
					3000K	24°	1200lm	800lm	STS2-9302411N-WG
						40°	1200lm	800lm	STS2-9304011N-WG
						55°	1200lm	650lm	STS2-9305511N-WG
					4000K	24°	1300lm	850lm	STS2-9402411N-WG
						40°	1300lm	850lm	STS2-9404011N-WG
						55°	1300lm	700lm	STS2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for STS1-9302408N-WM → STS3-9302408N-WM
STS2-9302411N-WM → STS4-9302411N-WM




Trimless code for STS1-9302408N-WM → ETS1-9302408N-WM
STS2-9302411N-WM → ETS2-9302411N-WM





NEKO / SENSE 100 / S100R1
Adjustable LED Downlight

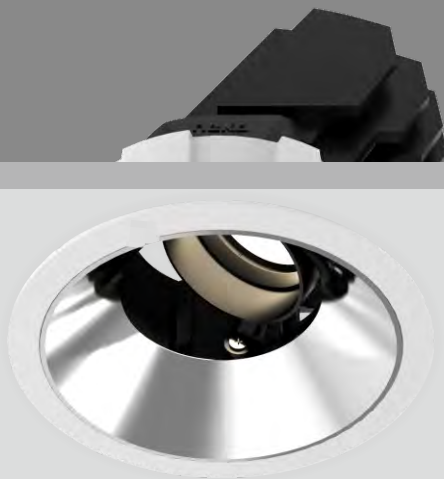

13W

CRI90

2700K
3000K
4000K

20°
40°
50°

CITIZEN

50,000h@L80B10

UGR
< 19

IP 20

5

GUARANTEE

CB

CE

100

1-25mm
Ceiling Thickness

121

355
Ø110

~30°



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WC SSR1-9274013N-WC SSR1-9275013N-WC	
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WC SSR1-9304013N-WC SSR1-9305013N-WC
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WC SSR1-9404013N-WC SSR1-9405013N-WC

13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WW SSR1-9274013N-WW SSR1-9275013N-WW
						3000K	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WW SSR1-9304013N-WW SSR1-9305013N-WW
						4000K	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WW SSR1-9404013N-WW SSR1-9405013N-WW



13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WG SSR1-9274013N-WG SSR1-9275013N-WG
						3000K	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WG SSR1-9304013N-WG SSR1-9305013N-WG
						4000K	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WG SSR1-9404013N-WG SSR1-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SSR1-9304013N-WM → SSR4-9304013N-WM



Trimless code for SSR1-9304013N-WM → ESR1-9304013N-WM



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WS	
									SSR1-9274013N-WS	
									SSR1-9275013N-WS	
						3000K	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WS	
									SSR1-9304013N-WS	
									SSR1-9305013N-WS	
						4000K	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WS	
									SSR1-9404013N-WS	
									SSR1-9405013N-WS	

13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WM SSR1-9274013N-WM SSR1-9275013N-WM
						3000K	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WM SSR1-9304013N-WM SSR1-9305013N-WM
						4000K	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WM SSR1-9404013N-WM SSR1-9405013N-WM

13 W	15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSR1-9272013N-WB SSR1-9274013N-WB SSR1-9275013N-WB
						3000K	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSR1-9302013N-WB SSR1-9304013N-WB SSR1-9305013N-WB
						4000K	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSR1-9402013N-WB SSR1-9404013N-WB SSR1-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Optional accessory





Honeycomb
HCSR100

Code for SSR1-9304013N-WM with Honeycomb
SSR1-9304013N-WM-H

NEKO / SENSE 100 / S100S1
Adjustable LED Downlight

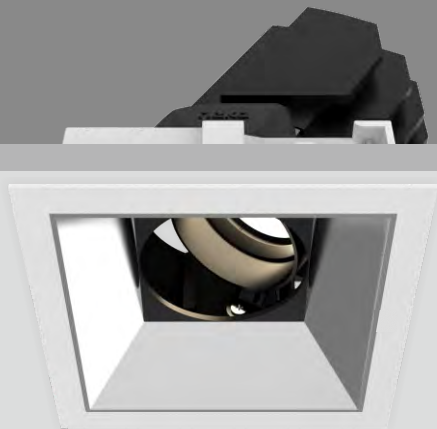

13W	CRI90	2700K 3000K 4000K	20° 40° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE		
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---



Chrome Black Reflector



White Reflector



Gold Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WC SSS1-9274013N-WC SSS1-9275013N-WC
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WC SSS1-9304013N-WC SSS1-9305013N-WC
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WC SSS1-9404013N-WC SSS1-9405013N-WC

13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WW SSS1-9274013N-WW SSS1-9275013N-WW
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WW SSS1-9304013N-WW SSS1-9305013N-WW
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WW SSS1-9404013N-WW SSS1-9405013N-WW


13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WG SSS1-9274013N-WG SSS1-9275013N-WG
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WG SSS1-9304013N-WG SSS1-9305013N-WG
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WG SSS1-9404013N-WG SSS1-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SSS1-9304013N-WM → SSS4-9304013N-WM




Trimless code for SSS1-9304013N-WM → ESS1-9304013N-WM



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WS SSS1-9274013N-WS SSS1-9275013N-WS
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WS SSS1-9304013N-WS SSS1-9305013N-WS
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WS SSS1-9404013N-WS SSS1-9405013N-WS

13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WM SSS1-9274013N-WM SSS1-9275013N-WM
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WM SSS1-9304013N-WM SSS1-9305013N-WM
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WM SSS1-9404013N-WM SSS1-9405013N-WM

13 W		15 W	36 V	350 mA	90	2700K	20° 40° 50°	1200lm 1200lm 1200lm	800lm 800lm 800lm	SSS1-9272013N-WB SSS1-9274013N-WB SSS1-9275013N-WB
						3000K	20° 40° 50°	1300lm 1300lm 1300lm	850lm 850lm 850lm	SSS1-9302013N-WB SSS1-9304013N-WB SSS1-9305013N-WB
						4000K	20° 40° 50°	1400lm 1400lm 1400lm	950lm 950lm 950lm	SSS1-9402013N-WB SSS1-9404013N-WB SSS1-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Optional accessory



Code for SSS1-9304013N-WM with Honeycomb
SSS1-9304013N-WM-H

NEKO / SENSE 100 / S100R2

Fixed LED Downlight

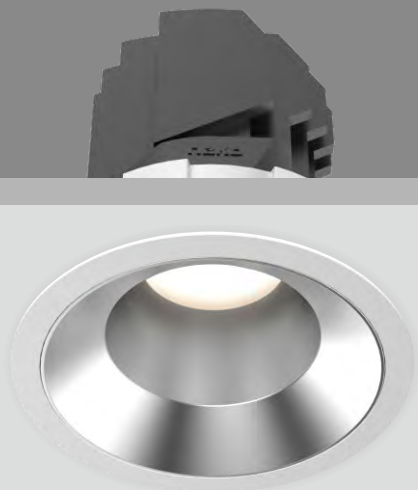

13W	CRI90	2700K 3000K 4000K	28° 35° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP 20		CB	CE						
-----	-------	-------------------------	-------------------	----------------------------------	-------------	-------	--	----	----	--	--	--	--	--	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WS SSR2-9273513N-WS SSR2-9275013N-WS
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WS SSR2-9303513N-WS SSR2-9305013N-WS
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WS SSR2-9403513N-WS SSR2-9405013N-WS
13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WM SSR2-9273513N-WM SSR2-9275013N-WM
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WM SSR2-9303513N-WM SSR2-9305013N-WM
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WM SSR2-9403513N-WM SSR2-9405013N-WM
13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WB SSR2-9273513N-WB SSR2-9275013N-WB
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WB SSR2-9303513N-WB SSR2-9305013N-WB
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WB SSR2-9403513N-WB SSR2-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WC SSR2-9273513N-WC SSR2-9275013N-WC
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WC SSR2-9303513N-WC SSR2-9305013N-WC
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WC SSR2-9403513N-WC SSR2-9405013N-WC

13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WW SSR2-9273513N-WW SSR2-9275013N-WW
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WW SSR2-9303513N-WW SSR2-9305013N-WW
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WW SSR2-9403513N-WW SSR2-9405013N-WW


13 W	15 W	36 V	350 mA	90	2700K	28° 35° 50°	1200lm 1200lm 1200lm	850lm 850lm 850lm	SSR2-9272813N-WG SSR2-9273513N-WG SSR2-9275013N-WG
					3000K	28° 35° 50°	1300lm 1300lm 1300lm	900lm 900lm 900lm	SSR2-9302813N-WG SSR2-9303513N-WG SSR2-9305013N-WG
					4000K	28° 35° 50°	1400lm 1400lm 1400lm	1000lm 1000lm 1000lm	SSR2-9402813N-WG SSR2-9403513N-WG SSR2-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for SSR2-9303513N-WM → SSR5-9303513N-WM





Trimless code for SSR2-9303513N-WM → ESR2-9303513N-WM



NEKO / SENSE 100 / S100S2
Fixed LED Downlight

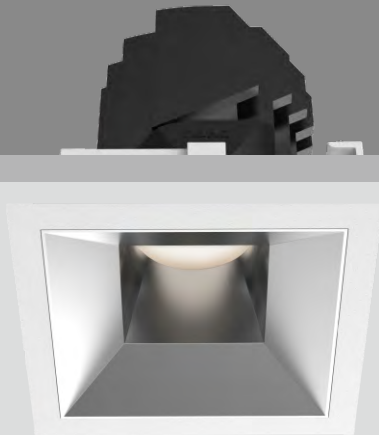

13W	CRI90	2700K 3000K 4000K	28° 35° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE					
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	--	---	---



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code							
13 W	15 W	36 V	350 mA	90	2700K	28°	1200lm	850lm	SSS2-9272813N-WS								
						35°	1200lm	850lm	SSS2-9273513N-WS								
						50°	1200lm	850lm	SSS2-9275013N-WS								
						3000K	28°	1300lm	900lm		SSS2-9302813N-WS						
							35°	1300lm	900lm		SSS2-9303513N-WS						
							50°	1300lm	900lm		SSS2-9305013N-WS						
						4000K	28°	1400lm	1000lm		SSS2-9402813N-WS						
							35°	1400lm	1000lm		SSS2-9403513N-WS						
							50°	1400lm	1000lm		SSS2-9405013N-WS						
						13 W	15 W	36 V	350 mA		90	2700K	28°	1200lm	850lm	SSS2-9272813N-WM	
													35°	1200lm	850lm	SSS2-9273513N-WM	
50°	1200lm	850lm	SSS2-9275013N-WM														
3000K	28°	1300lm	900lm	SSS2-9302813N-WM													
	35°	1300lm	900lm	SSS2-9303513N-WM													
	50°	1300lm	900lm	SSS2-9305013N-WM													
4000K	28°	1400lm	1000lm	SSS2-9402813N-WM													
	35°	1400lm	1000lm	SSS2-9403513N-WM													
	50°	1400lm	1000lm	SSS2-9405013N-WM													
13 W	15 W	36 V	350 mA	90	2700K					28°			1200lm	850lm	SSS2-9272813N-WB		
										35°			1200lm	850lm	SSS2-9273513N-WB		
						50°	1200lm	850lm	SSS2-9275013N-WB								
						3000K	28°	1300lm	900lm	SSS2-9302813N-WB							
							35°	1300lm	900lm	SSS2-9303513N-WB							
							50°	1300lm	900lm	SSS2-9305013N-WB							
						4000K	28°	1400lm	1000lm	SSS2-9402813N-WB							
							35°	1400lm	1000lm	SSS2-9403513N-WB							
							50°	1400lm	1000lm	SSS2-9405013N-WB							
						Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)											

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	28°	1200lm	850lm	SSS2-9272813N-WC	
						35°	1200lm	850lm	SSS2-9273513N-WC	
						50°	1200lm	850lm	SSS2-9275013N-WC	
						3000K	28°	1300lm	900lm	SSS2-9302813N-WC
							35°	1300lm	900lm	SSS2-9303513N-WC
							50°	1300lm	900lm	SSS2-9305013N-WC
						4000K	28°	1400lm	1000lm	SSS2-9402813N-WC
							35°	1400lm	1000lm	SSS2-9403513N-WC
							50°	1400lm	1000lm	SSS2-9405013N-WC

13 W	15 W	36 V	350 mA	90	2700K	28°	1200lm	850lm	SSS2-9272813N-WW		
						35°	1200lm	850lm	SSS2-9273513N-WW		
						50°	1200lm	850lm	SSS2-9275013N-WW		
						3000K	28°	1300lm	900lm		SSS2-9302813N-WW
							35°	1300lm	900lm		SSS2-9303513N-WW
							50°	1300lm	900lm		SSS2-9305013N-WW
						4000K	28°	1400lm	1000lm		SSS2-9402813N-WW
							35°	1400lm	1000lm		SSS2-9403513N-WW
							50°	1400lm	1000lm		SSS2-9405013N-WW


13 W	15 W	36 V	350 mA	90	2700K	28°	1200lm	850lm	SSS2-9272813N-WG	
						35°	1200lm	850lm	SSS2-9273513N-WG	
						50°	1200lm	850lm	SSS2-9275013N-WG	
						3000K	28°	1300lm	900lm	SSS2-9302813N-WG
							35°	1300lm	900lm	SSS2-9303513N-WG
							50°	1300lm	900lm	SSS2-9305013N-WG
						4000K	28°	1400lm	1000lm	SSS2-9402813N-WG
							35°	1400lm	1000lm	SSS2-9403513N-WG
							50°	1400lm	1000lm	SSS2-9405013N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SSS2-9303513N-WM → SSS5-9303513N-WM



Trimless code for SSS2-9303513N-WM → ESS2-9303513N-WM





NEKO / SENSE 100 / S100R3
Wall Washer LED Downlight



13W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP20

CB

CE

1-25mm
Ceiling Thickness



Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
13	W	15	W	36	V	350	mA	90	2700K Wall Washer	1200lm	450lm	SSR3-927WW13N-WM
									3000K Wall Washer	1300lm	480lm	SSR3-930WW13N-WM
									4000K Wall Washer	1400lm	550lm	SSR3-940WW13N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SSR3-930WW13N-WM → SSR6-930WW13N-WM



Trimless code for SSR3-930WW13N-WM → ESR3-930WW13N-WM



NEKO / SENSE 100 / S100S3
Wall Washer LED Downlight



13W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP20

CB

CE

1-25mm
Ceiling Thickness



Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
13	W	15	W	36	V	350	mA	90	2700K Wall Washer	1200lm	450lm	SSS3-927WW13N-WM
									3000K Wall Washer	1300lm	480lm	SSS3-930WW13N-WM
									4000K Wall Washer	1400lm	550lm	SSS3-940WW13N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SSS3-930WW13N-WM → SSS6-930WW13N-WM




Trimless code for SSS3-930WW13N-WM → ESS3-930WW13N-WM

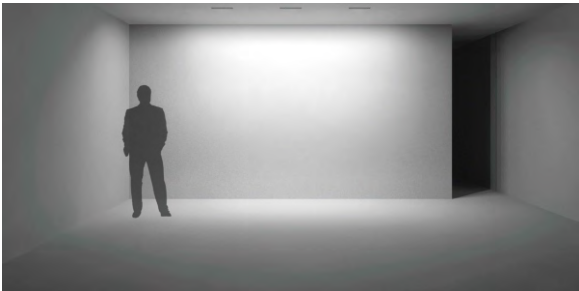



NEKO / SENSE 125 / S125R1
Adjustable LED Downlight

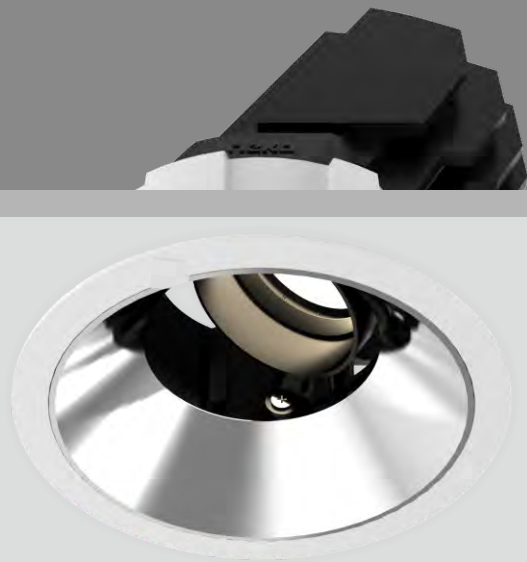

18W

CRI90

2700K
3000K
4000K

20°
40°
50°

CITIZEN

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEE

CB

CE



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
18 W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1200lm	SMR1-9272018N-WS						
						40°	1800lm	1200lm	SMR1-9274018N-WS						
						50°	1800lm	1200lm	SMR1-9275018N-WS						
					3000K	20°	2000lm	1300lm	SMR1-9302018N-WS						
						40°	2000lm	1300lm	SMR1-9304018N-WS						
						50°	2000lm	1300lm	SMR1-9305018N-WS						
					4000K	20°	2200lm	1400lm	SMR1-9402018N-WS						
						40°	2200lm	1400lm	SMR1-9404018N-WS						
						50°	2200lm	1400lm	SMR1-9405018N-WS						

					18 W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1200lm	SMR1-9272018N-WM	
											40°	1800lm	1200lm	SMR1-9274018N-WM	
50°	1800lm	1200lm	SMR1-9275018N-WM												
3000K	20°	2000lm	1300lm	SMR1-9302018N-WM											
	40°	2000lm	1300lm	SMR1-9304018N-WM											
	50°	2000lm	1300lm	SMR1-9305018N-WM											
4000K	20°	2200lm	1400lm	SMR1-9402018N-WM											
	40°	2200lm	1400lm	SMR1-9404018N-WM											
	50°	2200lm	1400lm	SMR1-9405018N-WM											

18 W	21 W	36 V	500 mA	90						2700K	20°	1800lm	1200lm	SMR1-9272018N-WB	
											40°	1800lm	1200lm	SMR1-9274018N-WB	
					50°	1800lm	1200lm	SMR1-9275018N-WB							
					3000K	20°	2000lm	1300lm	SMR1-9302018N-WB						
						40°	2000lm	1300lm	SMR1-9304018N-WB						
						50°	2000lm	1300lm	SMR1-9305018N-WB						
					4000K	20°	2200lm	1400lm	SMR1-9402018N-WB						
						40°	2200lm	1400lm	SMR1-9404018N-WB						
						50°	2200lm	1400lm	SMR1-9405018N-WB						

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Specular Reflector



Matt Reflector



Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SMR1-9304018N-WM with Honeycomb
SMR1-9304018N-WM-H



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1200lm	SMR1-9272018N-WC	
						40°	1800lm	1200lm	SMR1-9274018N-WC	
						50°	1800lm	1200lm	SMR1-9275018N-WC	
					3000K	20°	2000lm	1300lm	SMR1-9302018N-WC	
						40°	2000lm	1300lm	SMR1-9304018N-WC	
						50°	2000lm	1300lm	SMR1-9305018N-WC	
					4000K	20°	2200lm	1400lm	SMR1-9402018N-WC	
						40°	2200lm	1400lm	SMR1-9404018N-WC	
						50°	2200lm	1400lm	SMR1-9405018N-WC	

18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMR1-9272018N-WW SMR1-9274018N-WW SMR1-9275018N-WW
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMR1-9302018N-WW SMR1-9304018N-WW SMR1-9305018N-WW
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMR1-9402018N-WW SMR1-9404018N-WW SMR1-9405018N-WW

18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMR1-9272018N-WG SMR1-9274018N-WG SMR1-9275018N-WG
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMR1-9302018N-WG SMR1-9304018N-WG SMR1-9305018N-WG
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMR1-9402018N-WG SMR1-9404018N-WG SMR1-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available




Trimless code for SMR1-9304018N-WM → SMR4-9304018N-WM





Trimless code for SMR1-9304018N-WM → EMR1-9304018N-WM



NEKO / SENSE 125 / S125S1
Adjustable LED Downlight

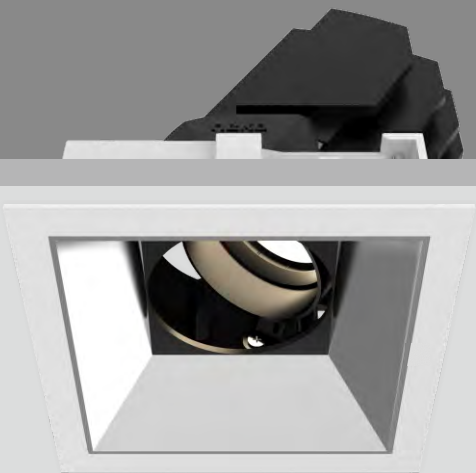


18W	CRI90	2700K 3000K 4000K	20° 40° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE				1-30mm Ceiling Thickness	
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	--	-----------------------------	---



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WS SMS1-9274018N-WS SMS1-9275018N-WS
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WS SMS1-9304018N-WS SMS1-9305018N-WS
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WS SMS1-9404018N-WS SMS1-9405018N-WS
18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WM SMS1-9274018N-WM SMS1-9275018N-WM
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WM SMS1-9304018N-WM SMS1-9305018N-WM
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WM SMS1-9404018N-WM SMS1-9405018N-WM
18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WB SMS1-9274018N-WB SMS1-9275018N-WB
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WB SMS1-9304018N-WB SMS1-9305018N-WB
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WB SMS1-9404018N-WB SMS1-9405018N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb
HCSR125

Code for SMS1-9304018N-WM with Honeycomb
SMS1-9304018N-WM-H



Chrome Black Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WC SMS1-9274018N-WC SMS1-9275018N-WC
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WC SMS1-9304018N-WC SMS1-9305018N-WC
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WC SMS1-9404018N-WC SMS1-9405018N-WC

18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WW SMS1-9274018N-WW SMS1-9275018N-WW
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WW SMS1-9304018N-WW SMS1-9305018N-WW
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WW SMS1-9404018N-WW SMS1-9405018N-WW

18 W	21 W	36 V	500 mA	90	2700K	20° 40° 50°	1800lm 1800lm 1800lm	1200lm 1200lm 1200lm	SMS1-9272018N-WG SMS1-9274018N-WG SMS1-9275018N-WG
					3000K	20° 40° 50°	2000lm 2000lm 2000lm	1300lm 1300lm 1300lm	SMS1-9302018N-WG SMS1-9304018N-WG SMS1-9305018N-WG
					4000K	20° 40° 50°	2200lm 2200lm 2200lm	1400lm 1400lm 1400lm	SMS1-9402018N-WG SMS1-9404018N-WG SMS1-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available




Trimless code for SMS1-9304018N-WM → SMS4-9304018N-WM



Trimless code for SMS1-9304018N-WM → EMS1-9304018N-WM



NEKO / SENSE 125 / S125R2
Fixed LED Downlight

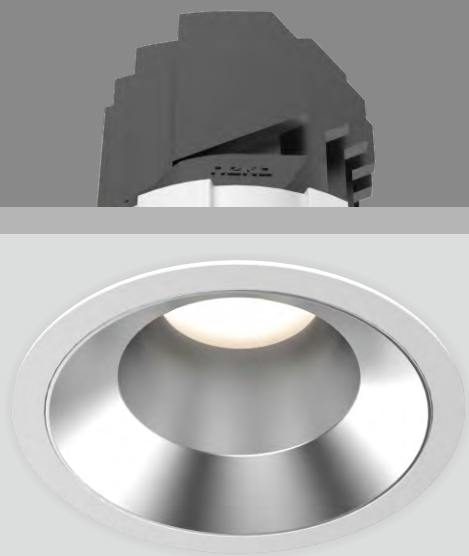

18W	CRI90	2700K 3000K 4000K	28° 40° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP 20	5 GUARANTEE	CB	CE				1-30mm Ceiling Thickness	162 Ø137
-----	-------	-------------------------	-------------------	----------------------------------	-------------	-------	----------------	----	----	--	--	--	-----------------------------	-------------

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WS SMR2-9274018N-WS SMR2-9275018N-WS
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WS SMR2-9304018N-WS SMR2-9305018N-WS
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WS SMR2-9404018N-WS SMR2-9405018N-WS



Specular Reflector



Matt Reflector



Black Reflector

18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WM SMR2-9274018N-WM SMR2-9275018N-WM
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WM SMR2-9304018N-WM SMR2-9305018N-WM
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WM SMR2-9404018N-WM SMR2-9405018N-WM

18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WB SMR2-9274018N-WB SMR2-9275018N-WB
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WB SMR2-9304018N-WB SMR2-9305018N-WB
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WB SMR2-9404018N-WB SMR2-9405018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WC SMR2-9274018N-WC SMR2-9275018N-WC
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WC SMR2-9304018N-WC SMR2-9305018N-WC
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WC SMR2-9404018N-WC SMR2-9405018N-WC

18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WW SMR2-9274018N-WW SMR2-9275018N-WW
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WW SMR2-9304018N-WW SMR2-9305018N-WW
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WW SMR2-9404018N-WW SMR2-9405018N-WW

18 W	21 W	36 V	500 mA	90	2700K	28° 40° 50°	1800lm 1800lm 1800lm	1300lm 1300lm 1300lm	SMR2-9272818N-WG SMR2-9274018N-WG SMR2-9275018N-WG
					3000K	28° 40° 50°	2000lm 2000lm 2000lm	1400lm 1400lm 1400lm	SMR2-9302818N-WG SMR2-9304018N-WG SMR2-9305018N-WG
					4000K	28° 40° 50°	2200lm 2200lm 2200lm	1500lm 1500lm 1500lm	SMR2-9402818N-WG SMR2-9404018N-WG SMR2-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available




Trimless code for SMR2-9304018N-WM → SMR5-9304018N-WM




Trimless code for SMR2-9304018N-WM → EMR2-9304018N-WM



NEKO / SENSE 125 / S125S2
Fixed LED Downlight

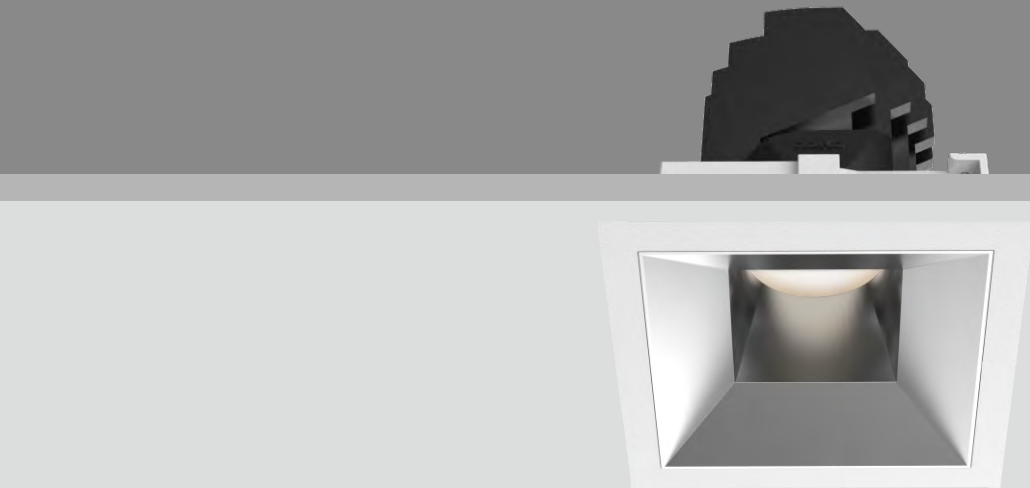

18W	CRI90	2700K 3000K 4000K	28° 40° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE				1-30mm Ceiling Thickness	162	
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	--	-----------------------------	-----	---

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 Specular Reflector	18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WS		
							40°	1800lm	1300lm	SMS2-9274018N-WS		
							50°	1800lm	1300lm	SMS2-9275018N-WS		
							3000K	28°	2000lm	1400lm	SMS2-9302818N-WS	
							40°	2000lm	1400lm	SMS2-9304018N-WS		
							50°	2000lm	1400lm	SMS2-9305018N-WS		
	4000K	28°	2200lm	1500lm	SMS2-9402818N-WS							
		40°	2200lm	1500lm	SMS2-9404018N-WS							
		50°	2200lm	1500lm	SMS2-9405018N-WS							

		 Matt Reflector	18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WM
									40°	1800lm	1300lm	SMS2-9274018N-WM
50°	1800lm								1300lm	SMS2-9275018N-WM		
3000K	28°								2000lm	1400lm	SMS2-9302818N-WM	
40°	2000lm								1400lm	SMS2-9304018N-WM		
50°	2000lm								1400lm	SMS2-9305018N-WM		
4000K	28°		2200lm	1500lm	SMS2-9402818N-WM							
	40°		2200lm	1500lm	SMS2-9404018N-WM							
	50°		2200lm	1500lm	SMS2-9405018N-WM							

	 Black Reflector		18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WB
									40°	1800lm	1300lm	SMS2-9274018N-WB
50°		1800lm							1300lm	SMS2-9275018N-WB		
3000K		28°							2000lm	1400lm	SMS2-9302818N-WB	
40°		2000lm							1400lm	SMS2-9304018N-WB		
50°		2000lm							1400lm	SMS2-9305018N-WB		
4000K		28°	2200lm	1500lm	SMS2-9402818N-WB							
		40°	2200lm	1500lm	SMS2-9404018N-WB							
		50°	2200lm	1500lm	SMS2-9405018N-WB							

		Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WC	
						40°	1800lm	1300lm	SMS2-9274018N-WC	
						50°	1800lm	1300lm	SMS2-9275018N-WC	
					3000K	28°	2000lm	1400lm	SMS2-9302818N-WC	
						40°	2000lm	1400lm	SMS2-9304018N-WC	
						50°	2000lm	1400lm	SMS2-9305018N-WC	
					4000K	28°	2200lm	1500lm	SMS2-9402818N-WC	
						40°	2200lm	1500lm	SMS2-9404018N-WC	
						50°	2200lm	1500lm	SMS2-9405018N-WC	

18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WW
						40°	1800lm	1300lm	SMS2-9274018N-WW
						50°	1800lm	1300lm	SMS2-9275018N-WW
					3000K	28°	2000lm	1400lm	SMS2-9302818N-WW
						40°	2000lm	1400lm	SMS2-9304018N-WW
						50°	2000lm	1400lm	SMS2-9305018N-WW
					4000K	28°	2200lm	1500lm	SMS2-9402818N-WW
						40°	2200lm	1500lm	SMS2-9404018N-WW
						50°	2200lm	1500lm	SMS2-9405018N-WW


18 W	21 W	36 V	500 mA	90	2700K	28°	1800lm	1300lm	SMS2-9272818N-WG
						40°	1800lm	1300lm	SMS2-9274018N-WG
						50°	1800lm	1300lm	SMS2-9275018N-WG
					3000K	28°	2000lm	1400lm	SMS2-9302818N-WG
						40°	2000lm	1400lm	SMS2-9304018N-WG
						50°	2000lm	1400lm	SMS2-9305018N-WG
					4000K	28°	2200lm	1500lm	SMS2-9402818N-WG
						40°	2200lm	1500lm	SMS2-9404018N-WG
						50°	2200lm	1500lm	SMS2-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for SMS2-9304018N-WM → SMS5-9304018N-WM



Trimless code for SMS2-9304018N-WM → EMS2-9304018N-WM



NEKO / SENSE 125 / **S125R3**
Wall Washer LED Downlight

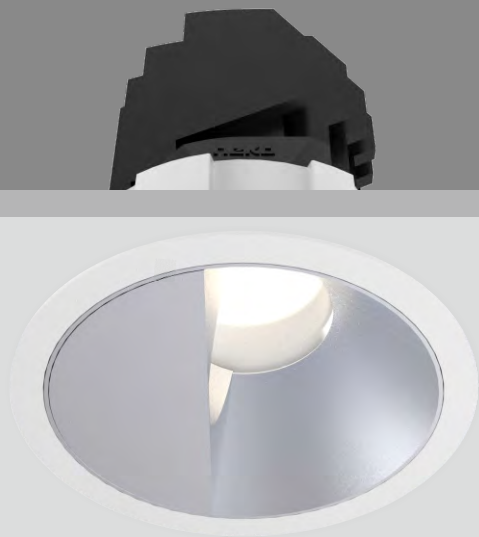

18W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP 20

CB

CE

1-30mm
Ceiling Thickness



Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K Wall Washer	1600lm	700lm	SMR3-927WW18N-WM		
					3000K Wall Washer	1800lm	750lm	SMR3-930WW18N-WM		
					4000K Wall Washer	2000lm	800lm	SMR3-940WW18N-WM		

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SMR3-930WW18N-WM → **SMR6**-930WW18N-WM



Trimless code for SMR3-930WW18N-WM → **EMR3**-930WW18N-WM



NEKO / SENSE 125 / **S125S3**
Wall Washer LED Downlight



18W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP 20

CB

CE

1-30mm
Ceiling Thickness



Matt Reflector


LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
18	W	21	W	36	V	500	mA	90	2700K Wall Washer	1600lm	600lm	SMS3-927WW18N-WM
									3000K Wall Washer	1800lm	680lm	SMS3-930WW18N-WM
									4000K Wall Washer	2000lm	750lm	SMS3-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SMS3-930WW18N-WM → **SMS6**-930WW18N-WM





Trimless code for SMS3-930WW18N-WM → **EMS3**-930WW18N-WM

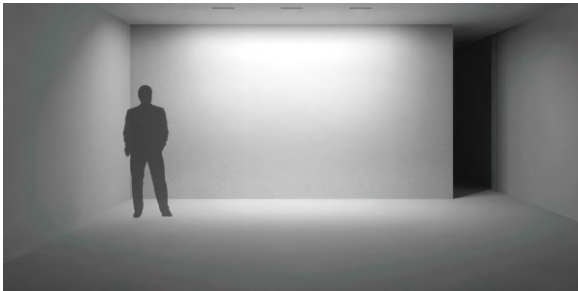



NEKO / SENSE 150 / S150R1
Adjustable LED Downlight

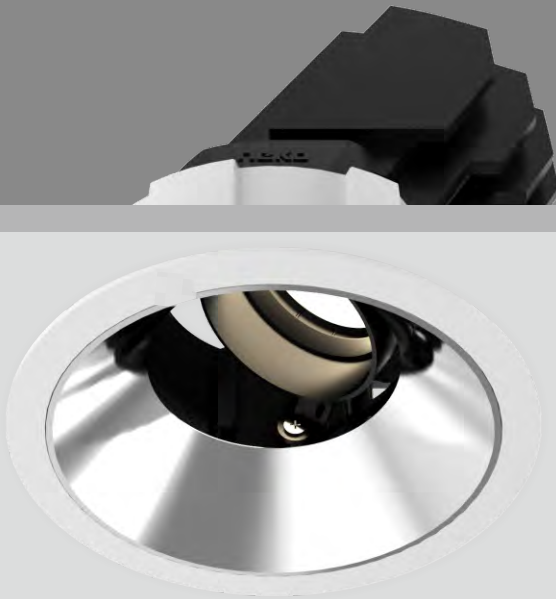

25W	CRI90	2700K 3000K 4000K	20° 35° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE				1-35mm Ceiling Thickness	212	
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	---	-----------------------------	-----	---



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WC
										SLR1-9273525N-WC
										SLR1-9275025N-WC
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WC
										SLR1-9303525N-WC
										SLR1-9305025N-WC
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WC
										SLR1-9403525N-WC
										SLR1-9405025N-WC

25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WW
										SLR1-9273525N-WW
										SLR1-9275025N-WW
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WW
										SLR1-9303525N-WW
										SLR1-9305025N-WW
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WW
										SLR1-9403525N-WW
										SLR1-9405025N-WW



25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WG
										SLR1-9273525N-WG
										SLR1-9275025N-WG
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WG
										SLR1-9303525N-WG
										SLR1-9305025N-WG
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WG
										SLR1-9403525N-WG
										SLR1-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SLR1-9303525N-WM → SLR4-9303525N-WM



Trimless code for SLR1-9303525N-WM → ELR1-9303525N-WM



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WS
										SLR1-9273525N-WS
										SLR1-9275025N-WS
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WS
										SLR1-9303525N-WS
										SLR1-9305025N-WS
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WS
										SLR1-9403525N-WS
										SLR1-9405025N-WS

25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WM
										SLR1-9273525N-WM
										SLR1-9275025N-WM
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WM
										SLR1-9303525N-WM
										SLR1-9305025N-WM
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WM
										SLR1-9403525N-WM
										SLR1-9405025N-WM

25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm		SLR1-9272025N-WB
										SLR1-9273525N-WB
										SLR1-9275025N-WB
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm		SLR1-9302025N-WB
										SLR1-9303525N-WB
										SLR1-9305025N-WB
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm		SLR1-9402025N-WB
										SLR1-9403525N-WB
										SLR1-9405025N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLR1-9302025N-WM with Honeycomb
SLR1-9302025N-WM-H

NEKO / SENSE 150 / S150S1
Adjustable LED Downlight

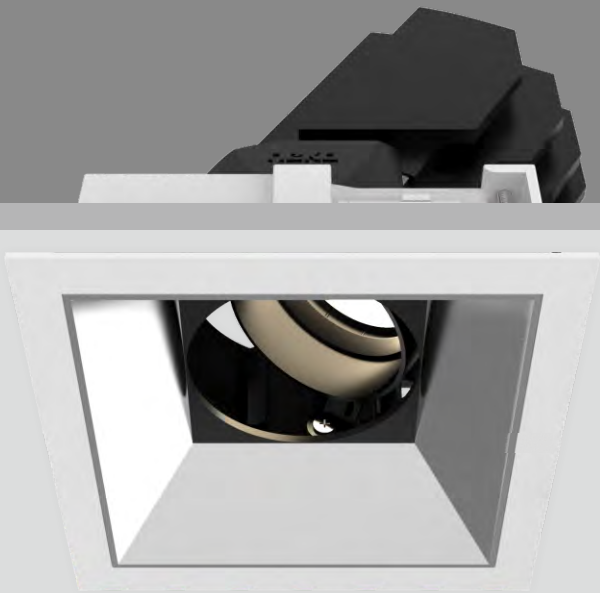


25W	CRI90	2700K 3000K 4000K	20° 35° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP 20		CB	CE				
-----	-------	-------------------------	-------------------	----------------------------------	-------------	-------	--	----	----	--	--	--	--



Specular Reflector



Matt Reflector



Black Reflector


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	1700lm	SLS1-9272025N-WS	
							35°	2500lm	1700lm	SLS1-9273525N-WS
							50°	2500lm	1700lm	SLS1-9275025N-WS
						3000K	20°	2700lm	1800lm	SLS1-9302025N-WS
							35°	2700lm	1800lm	SLS1-9303525N-WS
							50°	2700lm	1800lm	SLS1-9305025N-WS
						4000K	20°	2900lm	1900lm	SLS1-9402025N-WS
							35°	2900lm	1900lm	SLS1-9403525N-WS
							50°	2900lm	1900lm	SLS1-9405025N-WS
					2700K	20°	2500lm	1700lm	SLS1-9272025N-WM	
							35°	2500lm	1700lm	SLS1-9273525N-WM
							50°	2500lm	1700lm	SLS1-9275025N-WM
						3000K	20°	2700lm	1800lm	SLS1-9302025N-WM
							35°	2700lm	1800lm	SLS1-9303525N-WM
							50°	2700lm	1800lm	SLS1-9305025N-WM
						4000K	20°	2900lm	1900lm	SLS1-9402025N-WM
							35°	2900lm	1900lm	SLS1-9403525X-WM
							50°	2900lm	1900lm	SLS1-9405025X-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	1700lm	SLS1-9272025N-WB	
							35°	2500lm	1700lm	SLS1-9273525N-WB
							50°	2500lm	1700lm	SLS1-9275025N-WB
						3000K	20°	2700lm	1800lm	SLS1-9302025N-WB
							35°	2700lm	1800lm	SLS1-9303525N-WB
							50°	2700lm	1800lm	SLS1-9305025N-WB
						4000K	20°	2900lm	1900lm	SLS1-9402025N-WB
							35°	2900lm	1900lm	SLS1-9403525N-WB
							50°	2900lm	1900lm	SLS1-9405025N-WB
					2700K	20°	2500lm	1700lm	SLS1-9272025N-WC	
							35°	2500lm	1700lm	SLS1-9273525N-WC
							50°	2500lm	1700lm	SLS1-9275025N-WC
						3000K	20°	2700lm	1800lm	SLS1-9302025N-WC
							35°	2700lm	1800lm	SLS1-9303525N-WC
							50°	2700lm	1800lm	SLS1-9305025N-WC
						4000K	20°	2900lm	1900lm	SLS1-9402025N-WC
							35°	2900lm	1900lm	SLS1-9403525N-WC
							50°	2900lm	1900lm	SLS1-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLS1-9304025N-WM with Honeycomb
SLS1-9304025N-WM-H



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm	SLS1-9272025N-WC SLS1-9273525N-WC SLS1-9275025N-WC	
						3000K	20° 35° 50°	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm	SLS1-9302025N-WC SLS1-9303525N-WC SLS1-9305025N-WC
						4000K	20° 35° 50°	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm	SLS1-9402025N-WC SLS1-9403525N-WC SLS1-9405025N-WC



25 W	28 W	36 V	700 mA	90	2700K	20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm	SLS1-9272025N-WW SLS1-9273525N-WW SLS1-9275025N-WW
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm	SLS1-9302025N-WW SLS1-9303525N-WW SLS1-9305025N-WW
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm	SLS1-9402025N-WW SLS1-9403525N-WW SLS1-9405025N-WW
						20° 35° 50°	2500lm 2500lm 2500lm	1700lm 1700lm 1700lm	SLS1-9272025N-WG SLS1-9273525N-WG SLS1-9275025N-WG
						3000K	2700lm 2700lm 2700lm	1800lm 1800lm 1800lm	SLS1-9302025N-WG SLS1-9303525N-WG SLS1-9305025N-WG
						4000K	2900lm 2900lm 2900lm	1900lm 1900lm 1900lm	SLS1-9402025N-WG SLS1-9403525N-WG SLS1-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for SLS1-9303525X-WM → SLS4-9303525N-WM



Trimless code for SLS1-9303525X-WM → ELS1-9303525N-WM



NEKO / SENSE 150 / S150R2
Fixed LED Downlight

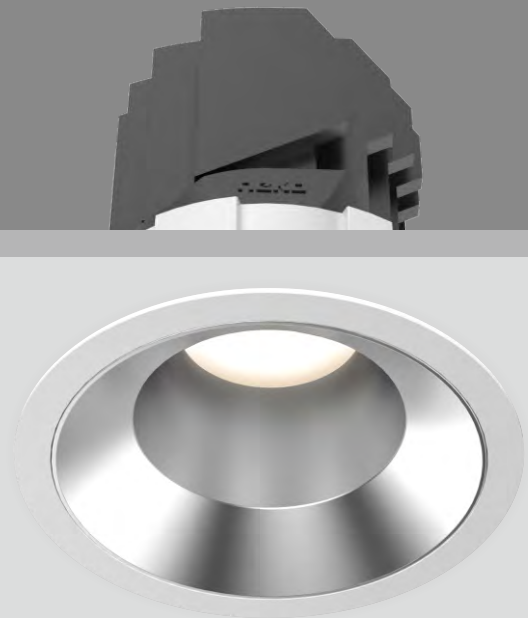

25W	CRI90	2700K 3000K 4000K	28° 32° 50°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE						
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	--	---	---	---



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
25 W	28 W	36 V	700 mA	90	2700K	28°	2500lm	1800lm	SLR2-9272825N-WS						
						32°	2500lm	1800lm	SLR2-9273225N-WS						
						50°	2500lm	1800lm	SLR2-9275025N-WS						
						3000K	28°	2700lm	1900lm	SLR2-9302825N-WS					
							32°	2700lm	1900lm	SLR2-9303225N-WS					
							50°	2700lm	1900lm	SLR2-9305025N-WS					
					4000K	28°	2900lm	2000lm	SLR2-9402825N-WS						
						32°	2900lm	2000lm	SLR2-9403225N-WS						
						50°	2900lm	2000lm	SLR2-9405025N-WS						

						25 W	28 W	36 V	700 mA	90	2700K	28°	2500lm	1800lm	SLR2-9272825N-WM
												32°	2500lm	1800lm	SLR2-9273225N-WM
50°	2500lm	1800lm	SLR2-9275025N-WM												
3000K	28°	2700lm	1900lm	SLR2-9302825N-WM											
	32°	2700lm	1900lm	SLR2-9303225N-WM											
	50°	2700lm	1900lm	SLR2-9305025N-WM											
4000K	28°	2900lm	2000lm	SLR2-9402825N-WM											
	32°	2900lm	2000lm	SLR2-9403225N-WM											
	50°	2900lm	2000lm	SLR2-9405025N-WM											

	25 W	28 W	36 V	700 mA	90						2700K	28°	2500lm	1800lm	SLR2-9272825N-WB
												32°	2500lm	1800lm	SLR2-9273225N-WB
50°						2500lm	1800lm	SLR2-9275025N-WB							
3000K						28°	2700lm	1900lm	SLR2-9302825N-WB						
						32°	2700lm	1900lm	SLR2-9303225N-WB						
						50°	2700lm	1900lm	SLR2-9305025N-WB						
4000K						28°	2900lm	2000lm	SLR2-9402825N-WB						
						32°	2900lm	2000lm	SLR2-9403225N-WB						
						50°	2900lm	2000lm	SLR2-9405025N-WB						

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	28°	2500lm	1800lm	SLR2-9272825N-WC	
						32°	2500lm	1800lm	SLR2-9273225N-WC	
						50°	2500lm	1800lm	SLR2-9275025N-WC	
					3000K	28°	2700lm	1900lm	SLR2-9302825N-WC	
						32°	2700lm	1900lm	SLR2-9303225N-WC	
						50°	2700lm	1900lm	SLR2-9305025N-WC	
					4000K	28°	2900lm	2000lm	SLR2-9402825N-WC	
						32°	2900lm	2000lm	SLR2-9403225N-WC	
						50°	2900lm	2000lm	SLR2-9405025N-WC	

25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLR2-9272825N-WW SLR2-9273225N-WW SLR2-9275025N-WW
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLR2-9302825N-WW SLR2-9303225N-WW SLR2-9305025N-WW
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLR2-9402825N-WW SLR2-9403225N-WW SLR2-9405025N-WW

25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLR2-9272825N-WG SLR2-9273225N-WG SLR2-9275025N-WG
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLR2-9302825N-WG SLR2-9303225N-WG SLR2-9305025N-WG
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLR2-9402825N-WG SLR2-9403225N-WG SLR2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available




Trimless code for SLR2-9303225N-WM → SLR5-9303225N-WM



Trimless code for SLR2-9303225N-WM → ELR2-9303225N-WM



NEKO / SENSE 150 / S150S2
Fixed LED Downlight

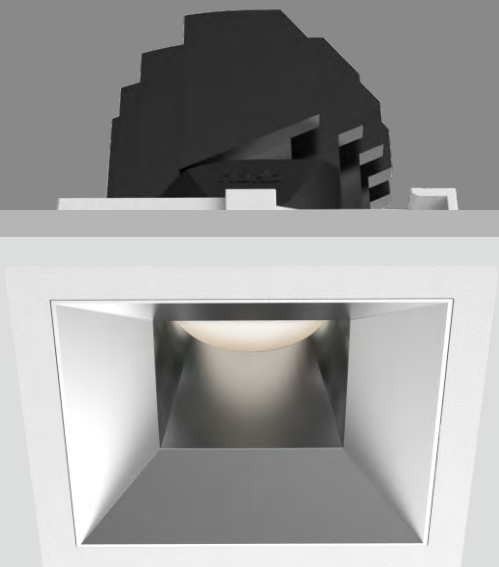

25W	CRI90	2700K 3000K 4000K	28° 32° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP 20		CB	CE						
-----	-------	-------------------------	-------------------	----------------------------------	--------------------	--------------	--	-----------	-----------	--	--	--	--	--	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WS SLS2-9273225N-WS SLS2-9275025N-WS
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WS SLS2-9303225N-WS SLS2-9305025N-WS
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WS SLS2-9403225N-WS SLS2-9405025N-WS
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WM SLS2-9273225N-WM SLS2-9275025N-WM
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WM SLS2-9303225N-WM SLS2-9305025N-WM
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WM SLS2-9403225N-WM SLS2-9405025N-WM
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WB SLS2-9273225N-WB SLS2-9275025N-WB
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WB SLS2-9303225N-WB SLS2-9305025N-WB
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WB SLS2-9403225N-WB SLS2-9405025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WC SLS2-9273225N-WC SLS2-9275025N-WC
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WC SLS2-9303225N-WC SLS2-9305025N-WC
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WC SLS2-9403225N-WC SLS2-9405025N-WC
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WW SLS2-9273225N-WW SLS2-9275025N-WW
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WW SLS2-9303225N-WW SLS2-9305025N-WW
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WW SLS2-9403225N-WW SLS2-9405025N-WW
25 W	28 W	36 V	700 mA	90	2700K	28° 32° 50°	2500lm 2500lm 2500lm	1800lm 1800lm 1800lm	SLS2-9272825N-WG SLS2-9273225N-WG SLS2-9275025N-WG
					3000K	28° 32° 50°	2700lm 2700lm 2700lm	1900lm 1900lm 1900lm	SLS2-9302825N-WG SLS2-9303225N-WG SLS2-9305025N-WG
					4000K	28° 32° 50°	2900lm 2900lm 2900lm	2000lm 2000lm 2000lm	SLS2-9402825N-WG SLS2-9403225N-WG SLS2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for SLS2-9303225N-WM → SLS5-9303225N-WM



Trimless code for SLS2-9303225N-WM → ELS2-9303225N-WM



NEKO / SENSE 150 / **S150R3**
Wall Washer LED Downlight

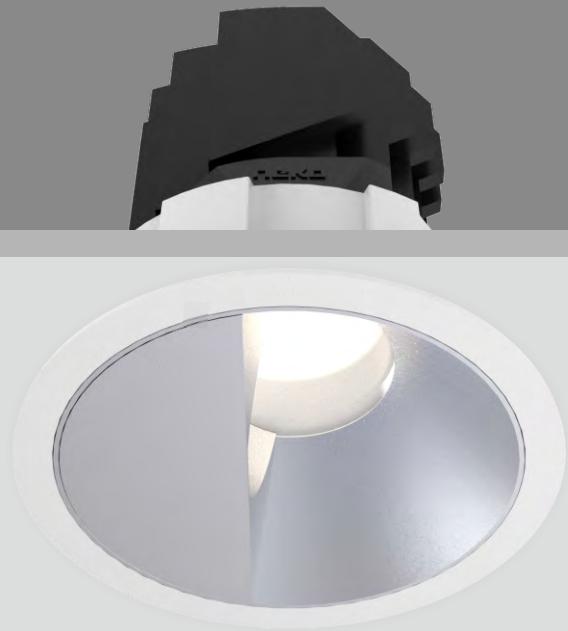

25W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP20

CB

CE

1-35mm
Ceiling Thickness

NEKO / SENSE 150 / **S150S3**
Wall Washer LED Downlight



25W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP20

CB

CE

1-35mm
Ceiling Thickness



LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	900lm	SLR3-927WW25 N -WM
					3000K	Wall Washer	2700lm	1000lm	SLR3-930WW25 N -WM
					4000K	Wall Washer	2900lm	1100lm	SLR3-940WW25 N -WM

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)




LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	900lm	SLS3-927WW25 N -WM
					3000K	Wall Washer	2700lm	1000lm	SLS3-930WW25 N -WM
					4000K	Wall Washer	2900lm	1100lm	SLS3-940WW25 N -WM

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)


Trimless Version available



Trimless code for SLR3-930WW25N-WM → SLR**6**-930WW25N-WM




Trimless code for SLR3-930WW25N-WM → ELR**3**-930WW25N-WM




Trimless Version available



Trimless code for SLS3-930WW25N-WM → SLS**6**-930WW25N-WM




Trimless code for SLS3-930WW25N-WM → ELS**3**-930WW25N-WM






NEKO / TAKEO
Fixed LED Downlight
Interchangeable Design
Super Eye Comfort
UGR<19
IP54
High Efficiency

! NEW

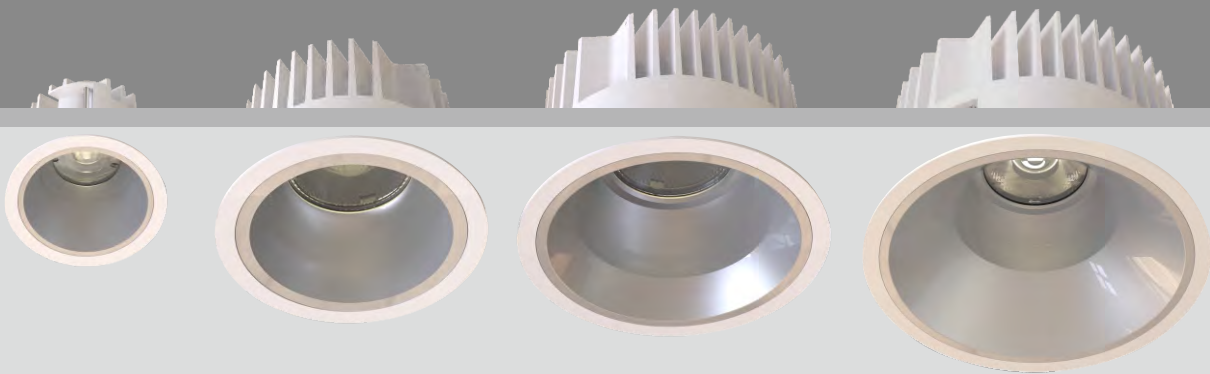


TAKEO T75

7.5W 700lm-750lm
11W 900lm-950lm




3"




TAKEO T100

9W 1000lm-1200lm
13W 1300lm-1600lm
18W 1800lm-2000lm




4"




TAKEO T150

18W 2000lm-2500lm
25W 2500lm-3300lm



6"

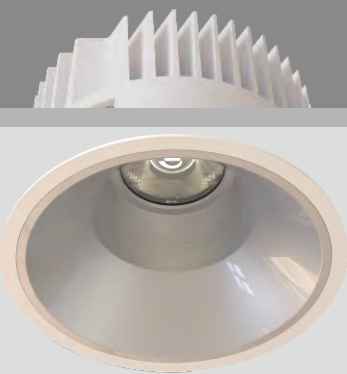

TAKEO T200

25W 2800lm-3400lm
38W 3900lm-4600lm
52W 4800lm-5600lm




8"




TAKEO TS68

7.5W 600lm-750lm
11W 800lm-950lm




3"



TAKEO TS100

9W 900lm-950lm
13W 1200lm-1300lm




4"




TAKEO TS150

18W 1700lm-1800lm
25W 2400lm-2600lm




6"

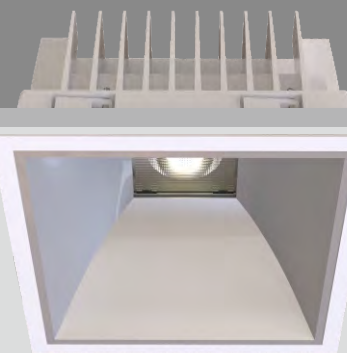

TAKEO TS200

25W 2200lm-2400lm
38W 3200lm-3400lm




8"



White



Black













White




Black

TAKEO

LED DOWNLIGHT SYSTEM

Model No.	T75	T100	T150	T200	T150-C	TS68	TS100	TS150	TS200
Product Photo									
Dimension (mm)									
Cutout (mm)					Ceiling Mounted				
Wattage	7.5W/ 11W	9W/ 13W/ 18W	18W/ 25W	25W/ 38W/ 52W	18W/ 25W	7.5W/ 11W	9W/ 13W	18W/ 25W	25W/ 38W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Wam/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Wam/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>80/ >90	>80/ >90	>80/ >90	>80/ >90	>80/ >90	>80/ >90	>80/ >90	>80/ >90	>80/ >90
Beam Angle	30°/ 50°	30°/ 50°	30°/ 60°	30°/ 60°	30°/ 60°	25°/60°	60°	70°	70°
Lumen Output	950lm @CRI80 3000K	1500lm @CRI80 3000K	3100lm @CRI80 3000K	5400lm @CRI80 3000K	3100lm @CRI80 3000K	900lm @CRI80 3000K	1200lm @CRI80 3000K	2400lm @CRI80 3000K	3200lm @CRI80 3000K
Reflector Color	 Matt  White  Black				 Matt  White  Black				
housing Color	White/ Black				White/ Black				
IP	IP54				IP20	IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				
Accessory									

NEKO / TAKEO / T75
Fixed LED Downlight
Super Eye Comfort
High Efficiency

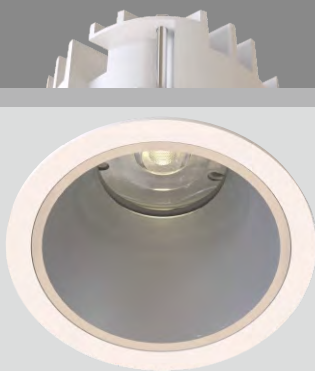

11W	CRI80	2700K	25°	CITIZEN	UGR	IP54	5	CB	CE	ETL
7.5W	CRI90	3000K 4000K	50°	50,000h@L80B10	< 19		75			Intertek



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WM
						50°	1000lm	720lm	TT1-8275008N-WM
					3000K	25°	1100lm	750lm	TT1-8302508N-WM
						50°	1100lm	750lm	TT1-8305008N-WM
					4000K	25°	1200lm	800lm	TT1-8402508N-WM
						50°	1200lm	800lm	TT1-8405008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WW
						50°	1000lm	720lm	TT1-8275008N-WW
					3000K	25°	1100lm	750lm	TT1-8302508N-WW
						50°	1100lm	750lm	TT1-8305008N-WW
					4000K	25°	1200lm	800lm	TT1-8402508N-WW
						50°	1200lm	800lm	TT1-8405008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WW
						50°	1300lm	900lm	TT2-8275011N-WW
					3000K	25°	1400lm	950lm	TT2-8302511N-WW
						50°	1400lm	950lm	TT2-8305011N-WW
					4000K	25°	1500lm	1050lm	TT2-8402511N-WW
						50°	1500lm	1050lm	TT2-8405011N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Office, Netherlands



Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WB
						50°	1000lm	720lm	TT1-8275008N-WB
					3000K	25°	1100lm	750lm	TT1-8302508N-WB
						50°	1100lm	750lm	TT1-8305008N-WB
					4000K	25°	1200lm	800lm	TT1-8402508N-WB
						50°	1200lm	800lm	TT1-8405008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WB
						50°	1300lm	900lm	TT2-8275011N-WB
					3000K	25°	1400lm	950lm	TT2-8302511N-WB
						50°	1400lm	950lm	TT2-8305011N-WB
					4000K	25°	1500lm	1050lm	TT2-8402511N-WB
						50°	1500lm	1050lm	TT2-8405011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100

Fixed LED Downlight

Super Eye Comfort
High Efficiency

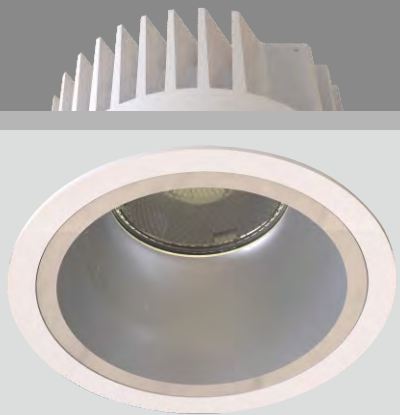

13W 9W	18W Available In Different LED Chip	CRI80 CRI90	2700K 3000K 4000K	30° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEAR GUARANTEE	CB	CE	ETL Intertek		1-25mm Ceiling Thickness		
-----------	--	----------------	-------------------------	------------	---------------------------	-------------	------	---------------------	----	----	-----------------	--	-----------------------------	--	--



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WM
						50°	1200lm	950lm	TS1-8275009N-WM
					3000K	30°	1300lm	1100lm	TS1-8303009N-WM
						50°	1300lm	1000lm	TS1-8305009N-WM
					4000K	30°	1400lm	1200lm	TS1-8403009N-WM
						50°	1400lm	1100lm	TS1-8405009N-WM
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WM
						50°	1700lm	1250lm	TS2-8275013N-WM
					3000K	30°	1800lm	1500lm	TS2-8303013N-WM
						50°	1800lm	1300lm	TS2-8305013N-WM
					4000K	30°	1900lm	1600lm	TS2-8403013N-WM
						50°	1900lm	1400lm	TS2-8405013N-WM
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WW
						50°	1200lm	950lm	TS1-8275009N-WW
					3000K	30°	1300lm	1100lm	TS1-8303009N-WW
						50°	1300lm	1000lm	TS1-8305009N-WW
					4000K	30°	1400lm	1200lm	TS1-8403009N-WW
						50°	1400lm	1100lm	TS1-8405009N-WW
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WW
						50°	1700lm	1250lm	TS2-8275013N-WW
					3000K	30°	1800lm	1500lm	TS2-8303013N-WW
						50°	1800lm	1300lm	TS2-8305013N-WW
					4000K	30°	1900lm	1600lm	TS2-8403013N-WW
						50°	1900lm	1400lm	TS2-8405013N-WW
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WB
						50°	1200lm	950lm	TS1-8275009N-WB
					3000K	30°	1300lm	1100lm	TS1-8303009N-WB
						50°	1300lm	1000lm	TS1-8305009N-WB
					4000K	30°	1400lm	1200lm	TS1-8403009N-WB
						50°	1400lm	1100lm	TS1-8405009N-WB
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WB
						50°	1700lm	1250lm	TS2-8275013N-WB
					3000K	30°	1800lm	1500lm	TS2-8303013N-WB
						50°	1800lm	1300lm	TS2-8305013N-WB
					4000K	30°	1900lm	1600lm	TS2-8403013N-WB
						50°	1900lm	1400lm	TS2-8405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



T100-18W
Matt Reflector



T100-18W
White Reflector





T100-18W
Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WM
						50°	2000lm	1500lm	TS3-8275018N-WM
					3000K	30°	2200lm	1900lm	TS3-8303018N-WM
						50°	2200lm	1600lm	TS3-8305018N-WM
					4000K	30°	2400lm	2000lm	TS3-8403018N-WM
						50°	2400lm	1700lm	TS3-8405018N-WM
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WM
						50°	1800lm	1300lm	TS3-9275018N-WM
					3000K	30°	1900lm	1650lm	TS3-9303018N-WM
						50°	1900lm	1400lm	TS3-9305013N-WM
					4000K	30°	2100lm	1800lm	TS3-9403018N-WM
						50°	2100lm	1500lm	TS3-9405018N-WM
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WW
						50°	2000lm	1500lm	TS3-8275018N-WW
					3000K	30°	2200lm	1900lm	TS3-8303018N-WW
						50°	2200lm	1600lm	TS3-8305018N-WW
					4000K	30°	2400lm	2000lm	TS3-8403018N-WW
						50°	2400lm	1700lm	TS3-8405018N-WW
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WW
						50°	1800lm	1300lm	TS3-9275018N-WW
					3000K	30°	1900lm	1650lm	TS3-9303018N-WW
						50°	1900lm	1400lm	TS3-9305018N-WW
					4000K	30°	2100lm	1800lm	TS3-9403018N-WW
						50°	2100lm	1500lm	TS3-9405018N-WW
18W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WB
						50°	2000lm	1500lm	TS3-8275018N-WB
					3000K	30°	2200lm	1900lm	TS3-8303018N-WB
						50°	2200lm	1600lm	TS3-8305018N-WB
					4000K	30°	2400lm	2000lm	TS3-8403018N-WB
						50°	2400lm	1700lm	TS3-8405018N-WB
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WB
						50°	1800lm	1300lm	TS3-9275018N-WB
					3000K	30°	1900lm	1650lm	TS3-9303018N-WB
						50°	1900lm	1400lm	TS3-9305018N-WB
					4000K	30°	2100lm	1800lm	TS3-9403018N-WB
						50°	2100lm	1500lm	TS3-9405018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100-DW
Fixed LED Downlight
Dim to Warm

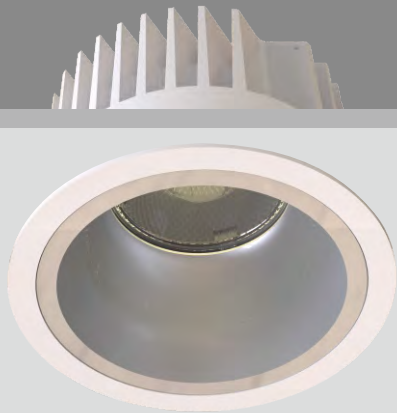

12W

CRI95

1800K-3000K
Dim to Warm

50°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

CB

CE

1-25mm
Ceiling Thickness

79



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WM
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WW
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WB

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

DIM to WARM



NEKO / TAKEO / T100-TW
Fixed LED Downlight
Tunable White

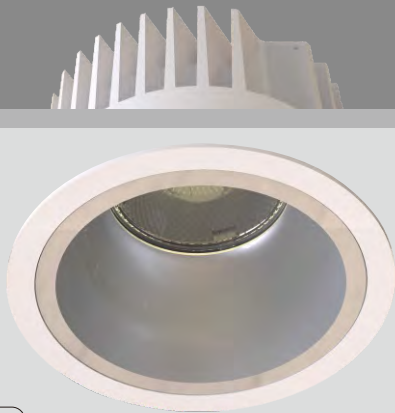

13W

CRI90

2700K-6500K
Tunable White

50°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

CB

CE

1-25mm
Ceiling Thickness

79

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WM
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WW
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WB


Code Remark: N=N(No Driver) D=D(DALI Dim)

NEKO / TAKEO / T150

Fixed LED Downlight

Super Eye Comfort

High Efficiency

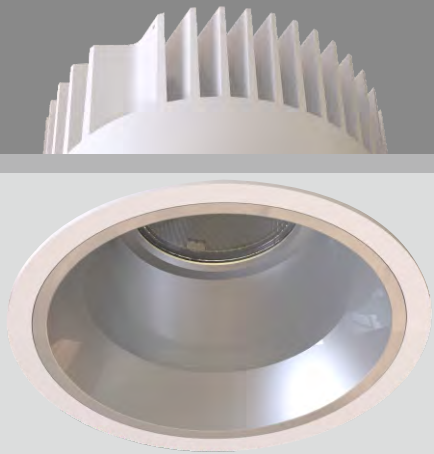

25W
18W

CRI80
CRI90

2700K
3000K
4000K

30°
60°

CITIZEN

TM150

50,000h@L80B10

UGR
< 19

IP 54

5

GUARANTEE

CB

CE

ETL

us

Intertek

150

1-25mm

Ceiling Thickness

100

Ø160




Matt Reflector



White Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WM	
						60°	2600lm	1950lm	TM1-8276018N-WM	
						3000K	30°	2800lm	2300lm	TM1-8303018N-WM
							60°	2800lm	2000lm	TM1-8306018N-WM
						4000K	30°	3000lm	2500lm	TM1-8403018N-WM
							60°	3000lm	2200lm	TM1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WM	
						60°	3600lm	2600lm	TM2-8276025N-WM	
						3000K	30°	3800lm	3100lm	TM2-8303025N-WM
							60°	3800lm	2700lm	TM2-8306025N-WM
						4000K	30°	4000lm	3300lm	TM2-8403025N-WM
							60°	4000lm	2900lm	TM2-8406025N-WM
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WW	
						60°	2600lm	1950lm	TM1-8276018N-WW	
						3000K	30°	2800lm	2300lm	TM1-8303018N-WW
							60°	2800lm	2000lm	TM1-8306018N-WW
						4000K	30°	3000lm	2500lm	TM1-8403018N-WW
							60°	3000lm	2200lm	TM1-8406018N-WW
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WW	
						60°	3600lm	2600lm	TM2-8276025N-WW	
						3000K	30°	3800lm	3100lm	TM2-8303025N-WW
							60°	3800lm	2700lm	TM2-8306025N-WW
						4000K	30°	4000lm	3300lm	TM2-8403025N-WW
							60°	4000lm	2900lm	TM2-8406025N-WW
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WB
						60°	2600lm	1950lm	TM1-8276018N-WB
					2700K	30°	2800lm	2300lm	TM1-8303018N-WB
						60°	2800lm	2000lm	TM1-8306018N-WB
					4000K	30°	3000lm	2500lm	TM1-8403018N-WB
						60°	3000lm	2200lm	TM1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WB
						60°	3600lm	2600lm	TM2-8276025N-WB
					3000K	30°	3800lm	3100lm	TM2-8303025N-WB
						60°	3800lm	2700lm	TM2-8306025N-WB
					4000K	30°	4000lm	3300lm	TM2-8403025N-WB
						60°	4000lm	2900lm	TM2-8406025N-WB
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

Tunable White



Technical drawing of the ceiling plate (150). The drawing shows a side view of the plate with a thickness of 1-25mm and a height of 100. The diameter is indicated as Ø160.



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1400lm 1200lm 1250lm 1350lm 1400lm 1400lm	TM1-9TW6018N-WM
25 W	28 W	36 V	700 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1900lm 1700lm 1750lm 1850lm 1900lm 1900lm	TM2-9TW6025N-WM
18 W	21 W	36 V	500 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1400lm 1200lm 1250lm 1350lm 1400lm 1400lm	TM1-9TW6018N-WW
25 W	28 W	36 V	700 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1900lm 1700lm 1750lm 1850lm 1900lm 1900lm	TM2-9TW6025N-WW
18 W	21 W	36 V	500 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1400lm 1200lm 1250lm 1350lm 1400lm 1400lm	TM1-9TW6018N-WB
25 W	28 W	36 V	700 mA	90	2700K-6500K @2700K @3000K @4000K @5000K @6500K	60° 60° 60° 60° 60°	Max.1900lm 1700lm 1750lm 1850lm 1900lm 1900lm	TM2-9TW6025N-WB

Code Remark: N=N(No Driver) D=D(DALI Dim)


A modern, minimalist interior space, likely a lounge or waiting area, featuring a large, multi-story glass wall with colorful panels (pink, blue, and white) and a dark, textured brick wall. The room is furnished with dark gray sofas, white coffee tables, and decorative floor lamps. The floor is highly reflective, mirroring the furniture and the colorful glass wall.

NEKO / TAKEO / T200

Fixed LED Downlight

Super Eye Comfort

High Efficiency

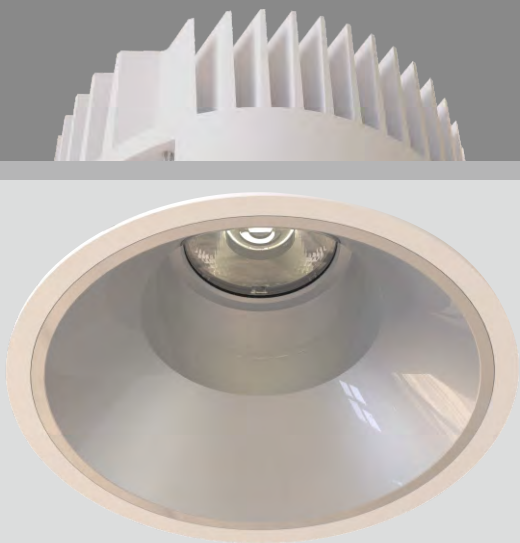

Project: Malaysia International Exhibition Convention Centre, Malaysia



38W	CRI80	2700K	18°	CITIZEN	UGR	IP54	5	CB	CE	ETL
52W	CRI90	3000K	30°	50,000h@L80B10	< 19		GUARANTEED			Intertek
		4000K	60°							



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WM
						30°	5200lm	4300lm	TL2-8273038N-WM
						60°	5200lm	3800lm	TL2-8276038N-WM
					3000K	18°	5400lm	4400lm	TL2-8301838N-WM
						30°	5400lm	4400lm	TL2-8303038N-WM
						60°	5400lm	3900lm	TL2-8306038N-WM
					4000K	18°	5600lm	4600lm	TL2-8401838N-WM
						30°	5600lm	4600lm	TL2-8403038N-WM
						60°	5600lm	4100lm	TL2-8406038N-WM
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WM
						30°	6400lm	5300lm	TL3-8273052N-WM
						60°	6400lm	4700lm	TL3-8276052N-WM
					3000K	18°	6600lm	5400lm	TL3-8301852N-WM
						30°	6600lm	5400lm	TL3-8303052N-WM
						60°	6600lm	4800lm	TL3-8306052N-WM
					4000K	18°	6800lm	5600lm	TL3-8401852N-WM
						30°	6800lm	5600lm	TL3-8403052N-WM
						60°	6800lm	5000lm	TL3-8406052N-WM



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WW
						30°	5200lm	4300lm	TL2-8273038N-WW
						60°	5200lm	3800lm	TL2-8306038N-WW
					3000K	18°	5400lm	4400lm	TL2-8301838N-WW
						30°	5400lm	4400lm	TL2-8303038N-WW
						60°	5400lm	3900lm	TL2-8306038N-WW
					4000K	18°	5600lm	4600lm	TL2-8401838N-WW
						30°	5600lm	4600lm	TL2-8403038N-WW
						60°	5600lm	4100lm	TL2-8406038N-WW
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WW
						30°	6400lm	5300lm	TL3-8273052N-WW
						60°	6400lm	4700lm	TL3-8306052N-WW
					3000K	18°	6600lm	5400lm	TL3-8301852N-WW
						30°	6600lm	5400lm	TL3-8303052N-WW
						60°	6600lm	4800lm	TL3-8306052N-WW
					4000K	18°	6800lm	5600lm	TL3-8401852N-WW
						30°	6800lm	5600lm	TL3-8403052N-WW
						60°	6800lm	5000lm	TL3-8406052N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WB
						30°	5200lm	4300lm	TL2-8273038N-WB
						60°	5200lm	3800lm	TL2-8276038N-WB
					3000K	18°	5400lm	4400lm	TL2-8301838N-WB
						30°	5400lm	4400lm	TL2-8303038N-WB
						60°	5400lm	3900lm	TL2-8306038N-WB
					4000K	18°	5600lm	4600lm	TL2-8401838N-WB
						30°	5600lm	4600lm	TL2-8403038N-WB
						60°	5600lm	4100lm	TL2-8406038N-WB
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WB
						30°	6400lm	5300lm	TL3-8273052N-WB
						60°	6400lm	4700lm	TL3-8276052N-WB
					3000K	18°	6600lm	5400lm	TL3-8301852N-WB
						30°	6600lm	5400lm	TL3-8303052N-WB
						60°	6600lm	4800lm	TL3-8306052N-WB
					4000K	18°	6800lm	5600lm	TL3-8401852N-WB
						30°	6800lm	5600lm	TL3-8403052N-WB
						60°	6800lm	5000lm	TL3-8406052N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

NEKO / TAKEO / T200-TW
Fixed LED Downlight
Tunable White

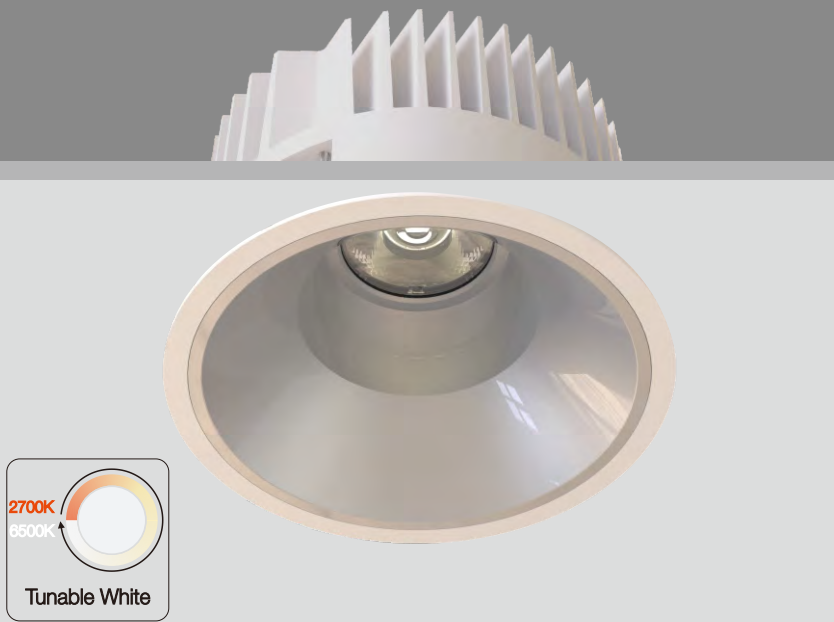

25W	CRI90	2700K-6500K Tunable White	60°	bridgeLux 50,000h@L80B10	UGR < 19	IP54	5 GUARANTEE	CB	CE	ETL Intertek		
-----	-------	------------------------------	-----	-----------------------------	-------------	------	----------------	----	----	-----------------	--	--



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

Project: Malaysia International Exhibition Convention Centre, Malaysia



NEKO / TAKEO / T150C

TAKEO150 Ceiling Light

Super Eye Comfort

High Efficiency



25W CRI80 2700K 30°
18W CRI90 3000K 60°

CITIZEN
50,000h@L80B10


UGR < 19

IP 20

5 YEAR GUARANTEE

CB

CE



Matt Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-WM
						60°	2800lm	2000lm	TMC1-8276018N-WM
					3000K	30°	2800lm	2300lm	TMC1-8303018N-WM
						60°	2800lm	2000lm	TMC1-8306018N-WM
					4000K	30°	3000lm	2500lm	TMC1-8403018N-WM
						60°	3000lm	2200lm	TMC1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-WM
						60°	3800lm	2700lm	TMC2-8276025N-WM
					3000K	30°	3800lm	3100lm	TMC2-8303025N-WM
						60°	3800lm	2700lm	TMC2-8306025N-WM
					4000K	30°	4000lm	3300lm	TMC2-8403025N-WM
						60°	4000lm	2900lm	TMC2-8406025N-WM

18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-BM
						60°	2800lm	2000lm	TMC1-8276018N-BM
					3000K	30°	2800lm	2300lm	TMC1-8303018N-BM
						60°	2800lm	2000lm	TMC1-8306018N-BM
					4000K	30°	3000lm	2500lm	TMC1-8403018N-BM
						60°	3000lm	2200lm	TMC1-8406018N-BM
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-BM
						60°	3800lm	2700lm	TMC2-8276025N-BM
					3000K	30°	3800lm	3100lm	TMC2-8303025N-BM
						60°	3800lm	2700lm	TMC2-8306025N-BM
					4000K	30°	4000lm	3300lm	TMC2-8403025N-BM
						60°	4000lm	2900lm	TMC2-8406025N-BM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



White Reflector



Matt Reflector



NEKO / TAKEO / TS68

Fixed LED Downlight

Super Eye Comfort
High Efficiency



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WB
						60°	1000lm	680lm	TTS1-8276008N-WB
					3000K	25°	1100lm	700lm	TTS1-8302508N-WB
						60°	1100lm	700lm	TTS1-8306008N-WB
					4000K	25°	1200lm	750lm	TTS1-8402508N-WB
						60°	1200lm	750lm	TTS1-8406008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WB
						60°	1300lm	870lm	TTS2-8276011N-WB
					3000K	25°	1400lm	900lm	TTS2-8302511N-WB
						60°	1400lm	900lm	TTS2-8306011N-WB
					4000K	25°	1500lm	950lm	TTS2-8402511N-WB
						60°	1500lm	950lm	TTS2-8406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

7.5 W
11 W

CRI80
CRI90

2700K
3000K
4000K

25°
60°

CITIZEN

50,000h@L80B10

UGR
< 19

IP54

5


GUARANTEE

CB

CE

ETL

Intertek



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8276008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8306008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8406008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8276011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8306011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8406011N-WM

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WW
						60°	1000lm	680lm	TTS1-8276008N-WW
					3000K	25°	1100lm	700lm	TTS1-8302508N-WW
						60°	1100lm	700lm	TTS1-8306008N-WW
					4000K	25°	1200lm	750lm	TTS1-8402508N-WW
						60°	1200lm	750lm	TTS1-8406008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WW
						60°	1300lm	870lm	TTS2-8276011N-WW
					3000K	25°	1400lm	900lm	TTS2-8302511N-WW
						60°	1400lm	900lm	TTS2-8306011N-WW
					4000K	25°	1500lm	950lm	TTS2-8402511N-WW
						60°	1500lm	950lm	TTS2-8406011N-WW


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO / TAKEO/TS100

Fixed LED Downlight


Super Eye Comfort
High Efficiency



NEKO / TAKEO/TS150

Fixed LED Downlight

Super Eye Comfort
High Efficiency

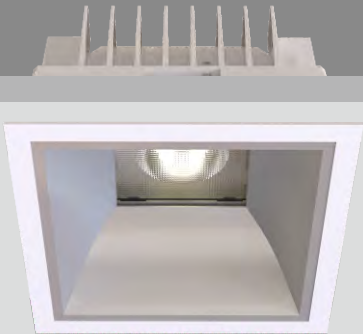

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WM
					3000K	60°	1300lm	900lm	TSS1-8306009N-WM
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WM
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WM
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WM
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WM

Matt Reflector

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WW
					3000K	60°	1300lm	900lm	TSS1-8306009N-WW
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WW
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WW
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WW
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WW

White Reflector

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WB
					3000K	60°	1300lm	900lm	TSS1-8306009N-WB
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WB
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WB
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WB
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WB

Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WM
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WM
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WM
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WM
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WM
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WM

Matt Reflector

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WW
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WW
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WW
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WW
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WW
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WW

White Reflector

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WB
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WB
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WB
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WB
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WB
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WB

Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / TS200

Fixed LED Downlight

Super Eye Comfort
High Efficiency



Black Housing Available for TAKEO Series

25W
38W

CRI80
CRI90

2700K
3000K
4000K

70°

50,000h@L80B10

UGR
< 19


IP54

CB

200x200
Ceiling Thickness

1-25mm
Ceiling Thickness

132
220x220



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WM
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WM
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WM
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WM
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WM
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WM



White Reflector

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WW
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WW
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WW
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WW
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WW



Black Reflector

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WB
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WB
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WB
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WB
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WB
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO / MR16 Replacement LED Module

- NEKO LED-Module sind die perfekte Austauschlösung für MR16 Halogen.
- Sehr schickes und elegantes Design und vielfältig einsetzbar bei Downlight- und Spotanwendungen.
- Hohe Farbkonsistenz bei allen LED-Modulen innerhalb einer 3-Step-MacAdam-Ellipse
- Neko-LED-Module können in verschiedenen Leuchten verwendet werden, ohne Einfluss auf die Farbkonsistenz.
- Hervorragende Lichtausbeute und exzellenter Lampenlichtstromerhalt mit 50.000 Stunden Lebensdauer machen häufige Lampenwechsel zu einem Relikt der Vergangenheit.
- 5 Jahre Qualitätsgarantie von NEKO.



- The NEKO LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 3 MacAdam steps.
- You can use NEKO LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee

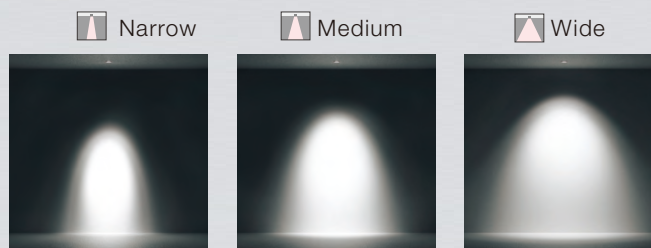

Verschiedene Abstrahlwinkel für architektonische Designs
Three beam angles for various architectural design requirements.




NEKO / MR16 Replacement
LED Module

Model No.	M3	M4
Product Photo		
Dimension (mm)		
Cutout (mm)	Mounted with Trim	Mounted with Trim
Wattage	7.5W/ 11W	9W/ 13W/ 18W
CCT	2700K/ 3000K/ 4000K Dim to Warm	2700K/ 3000K/ 4000K Dim to Warm
CRI	>80/ >90	>80/ >90
Beam Angle	15°/ 25°/ 35°/ 60°	20°/ 35°/ 60°
Lumen Output	1050lm @CRI80 3000K	1300lm @CRI80 3000K
Reflector Color	NEKO Standard	NEKO Standard
IP	IP54	IP54
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim
Accessory	Fit with CLUB Series Trims	Fit with CLUB Series Trims

NEKO / M3
LED Downlight Module
Fit with CLUB Series Trims



12W	CR195	1800K-3000K Dim to Warm	35° 60°	bridgelux 50,000h@L80B10	Replace Halogen 50W	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE
-----	-------	----------------------------	------------	-----------------------------	------------------------	-------------	------	----------------------	----	----




M3-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	35° 60°	1100lm 1100lm	Max.950lm Max.950lm	M3- 9D33512N-NN M3- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



11W 7.5W	CR190	2700K 3000K 4000K	15° 25° 35° 60°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE	ETL Intertek
-------------	-------	-------------------------	--------------------------	---------------------------	-------------	------	----------------------	----	----	-----------------



M3

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	31 V	350 mA	90	2700K	15° 25° 35° 60°	1000lm 1000lm 1000lm 1000lm	900lm 900lm 900lm 900lm	M3- 9271511N-NN M3- 9272511N-NN M3- 9273511N-NN M3- 9276011N-NN
					3000K	15° 25° 35° 60°	1100lm 1100lm 1100lm 1100lm	950lm 950lm 950lm 950lm	M3- 9301511N-NN M3- 9302511N-NN M3- 9303511N-NN M3- 9306011N-NN
					4000K	15° 25° 35° 60°	1200lm 1200lm 1200lm 1200lm	1000lm 1000lm 1000lm 1000lm	M3- 9401511N-NN M3- 9402511N-NN M3- 9403511N-NN M3- 9406011N-NN
7.5W	9 W	31 V	250 mA	90	2700K	15° 25° 35° 60°	850lm 850lm 850lm 850lm	650lm 650lm 650lm 650lm	M3- 9271508N-NN M3- 9272508N-NN M3- 9273508N-NN M3- 9276008N-NN
					3000K	15° 25° 35° 60°	900lm 900lm 900lm 900lm	700lm 700lm 700lm 700lm	M3- 9301508N-NN M3- 9302508N-NN M3- 9303508N-NN M3- 9306008N-NN
					4000K	15° 25° 35° 60°	950lm 950lm 950lm 950lm	750lm 750lm 750lm 750lm	M3- 9401508N-NN M3- 9402508N-NN M3- 9403508N-NN M3- 9406008N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Can be used in limited ceiling space of 80mm height


NEKO / M4

LED Downlight Module

Fit with CLUB Series Trims



12W	CRI95	1800K-3000K Dim to Warm	35° 60°	bridgelux 50,000h@L80B10	Replace Halogen 50W	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE
-----	-------	----------------------------	------------	-----------------------------	------------------------	-------------	------	----------------------	----	----




M4-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	35° 60°	1100lm 1100lm	Max.950lm Max.950lm	M4- 9D33512N-NN M4- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



13W 9W	18W Available In Different LED Chip	CRI90	2700K 3000K 4000K	20° 35° 60°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE	ETL
-----------	--	-------	-------------------------	-------------------	---------------------------	-------------	------	----------------------	----	----	-----



M4



M4-18W

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1300lm	1100lm	M4- 9272013N-NN
						35°	1300lm	1100lm	M4- 9273513N-NN
						60°	1300lm	1100lm	M4- 9276013N-NN
					3000K	20°	1400lm	1200lm	M4- 9302013N-NN
						35°	1400lm	1200lm	M4- 9303513N-NN
						60°	1400lm	1200lm	M4- 9306013N-NN
					4000K	20°	1500lm	1300lm	M4- 9402013N-NN
						35°	1500lm	1300lm	M4- 9403513N-NN
						60°	1500lm	1300lm	M4- 9406013N-NN
9W	11 W	36 V	250 mA	90	2700K	20°	900lm	800lm	M4- 9272009N-NN
						35°	900lm	800lm	M4- 9273509N-NN
						60°	900lm	800lm	M4- 9276009N-NN
					3000K	20°	1000lm	850lm	M4- 9302009N-NN
						35°	1000lm	850lm	M4- 9303509N-NN
						60°	1000lm	850lm	M4- 9306009N-NN
					4000K	20°	1100lm	950lm	M4- 9402009N-NN
						35°	1100lm	950lm	M4- 9403509N-NN
						60°	1100lm	950lm	M4- 9406009N-NN
18W	21 W	36 V	500 mA	90	2700K	20°	1800lm	1500lm	M4- 9272018N-NN
						35°	1800lm	1500lm	M4- 9273518N-NN
						60°	1800lm	1500lm	M4- 9276018N-NN
					3000K	20°	1900lm	1600lm	M4- 9302018N-NN
						35°	1900lm	1600lm	M4- 9303518N-NN
						60°	1900lm	1600lm	M4- 9306018N-NN
					4000K	20°	2000lm	1700lm	M4- 9402018N-NN
						35°	2000lm	1700lm	M4- 9403518N-NN
						60°	2000lm	1700lm	M4- 9406018N-NN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)










NEKO / CLUB
Trim Series

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

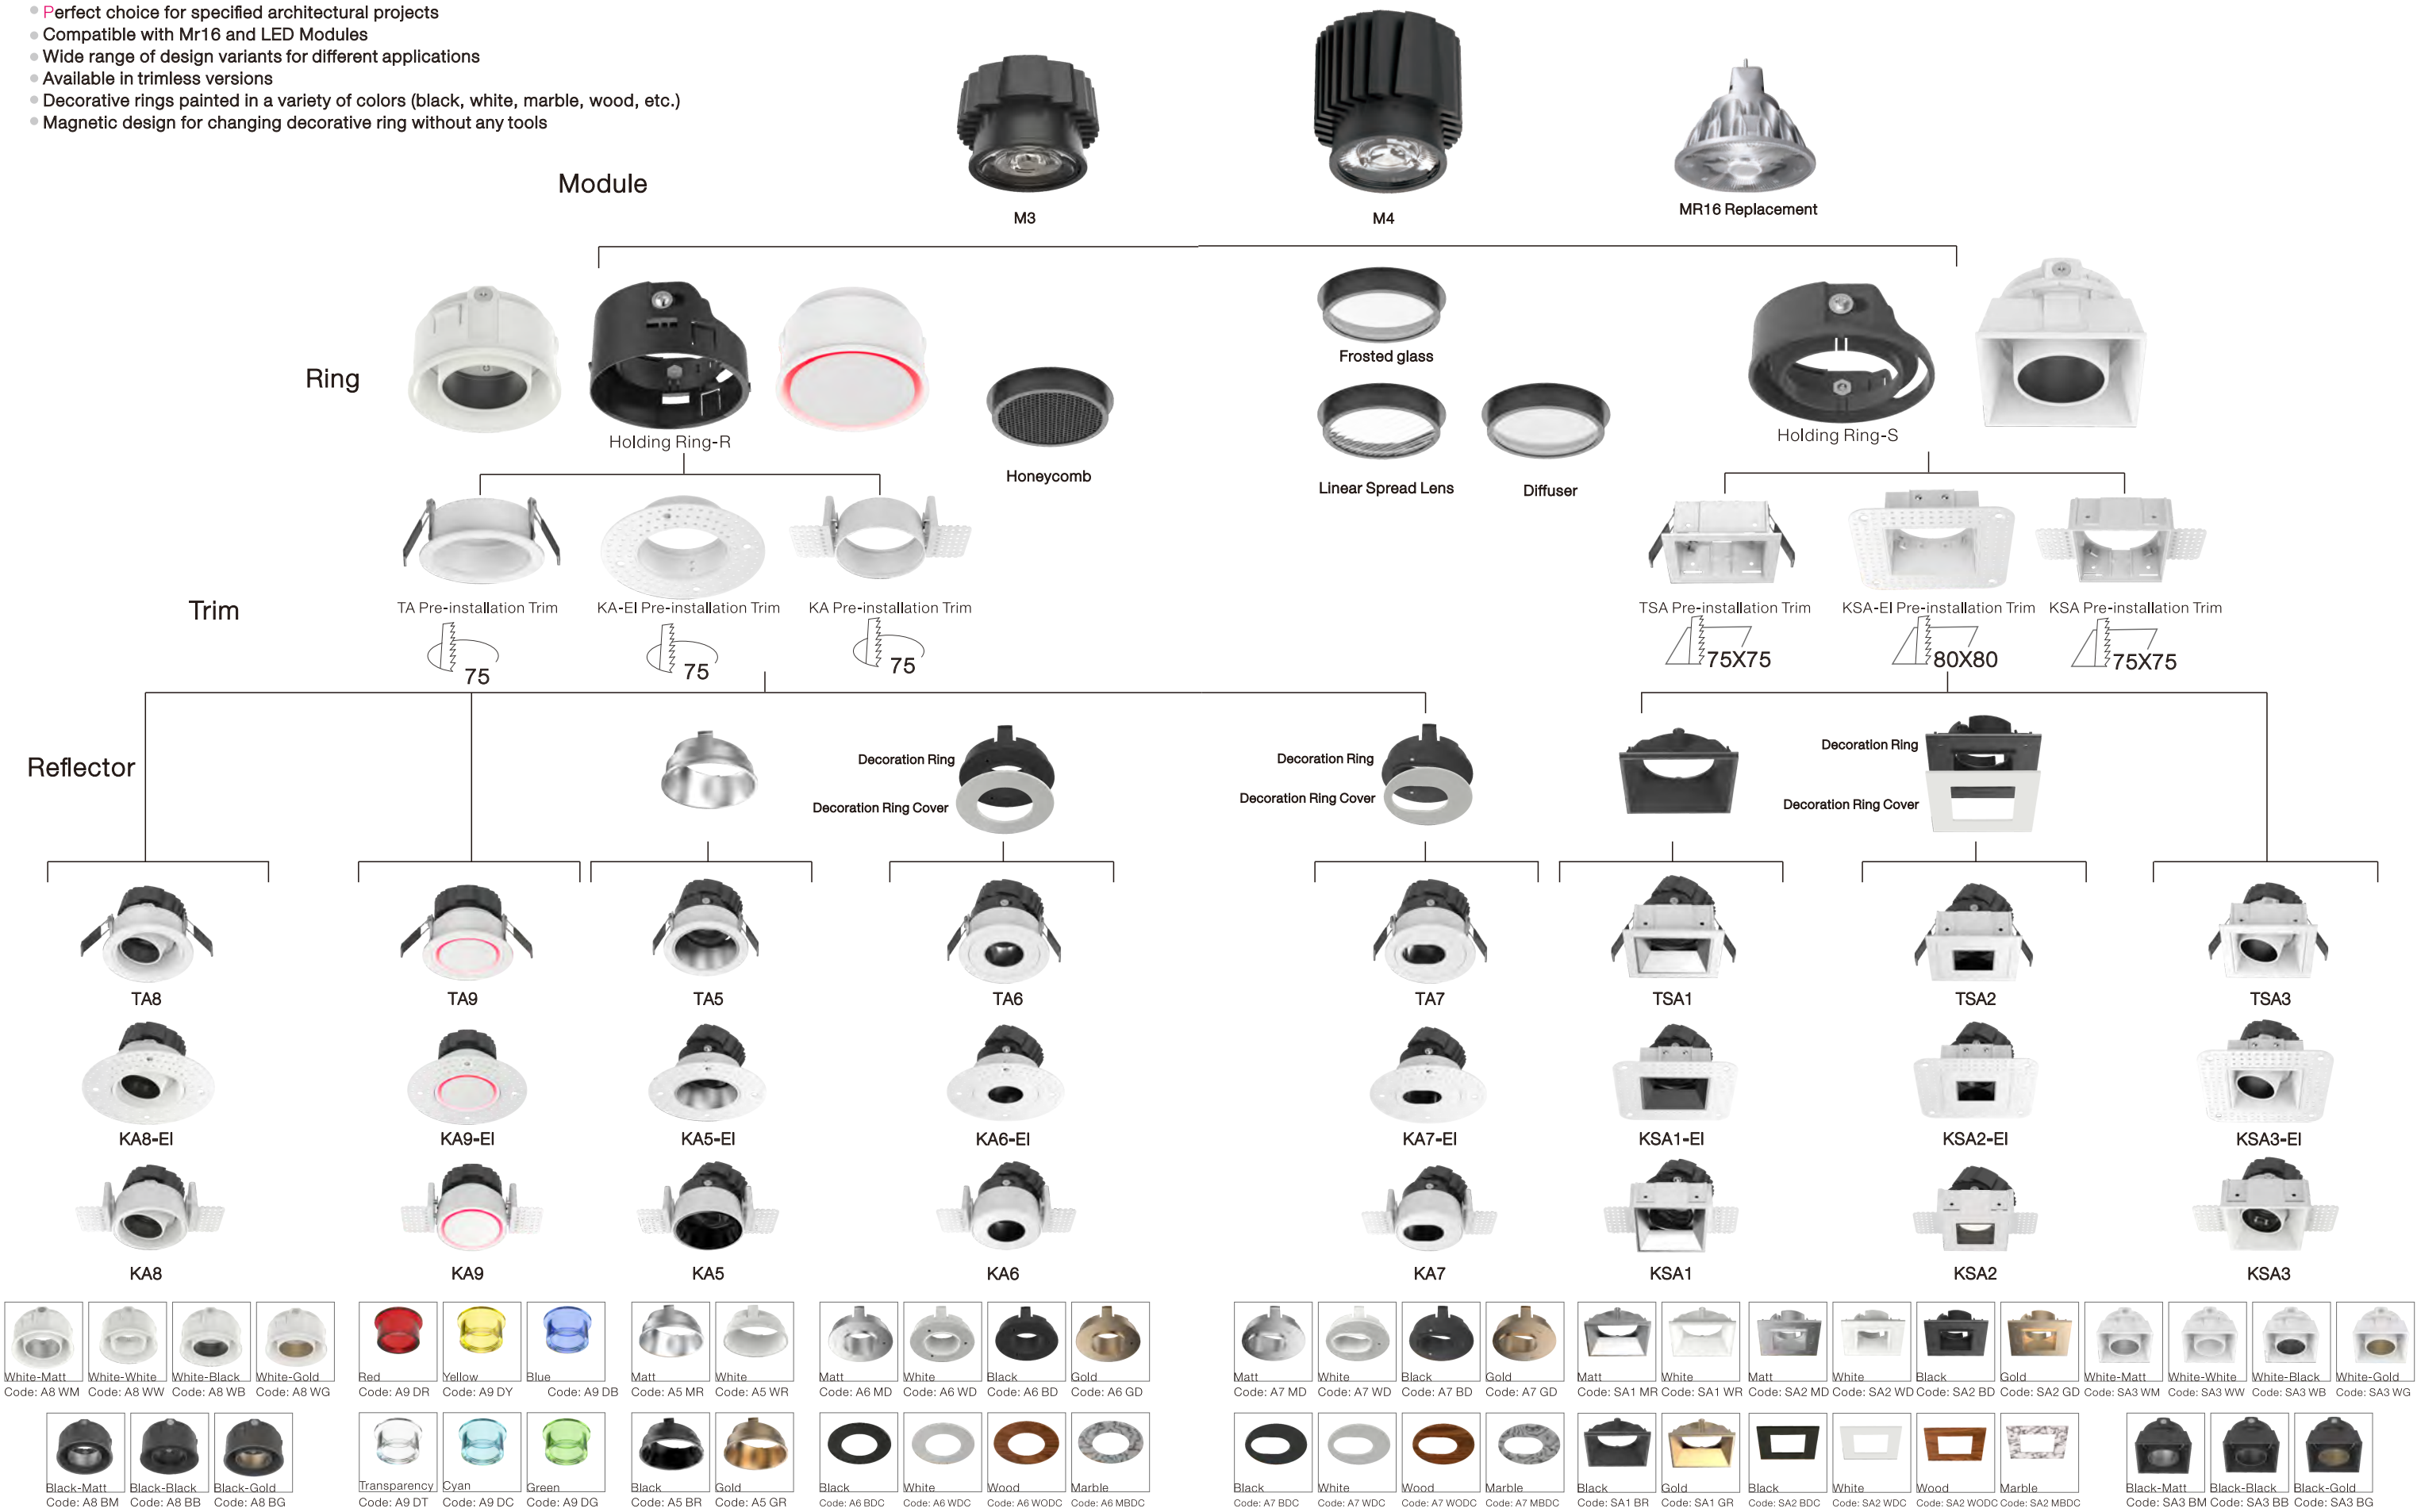

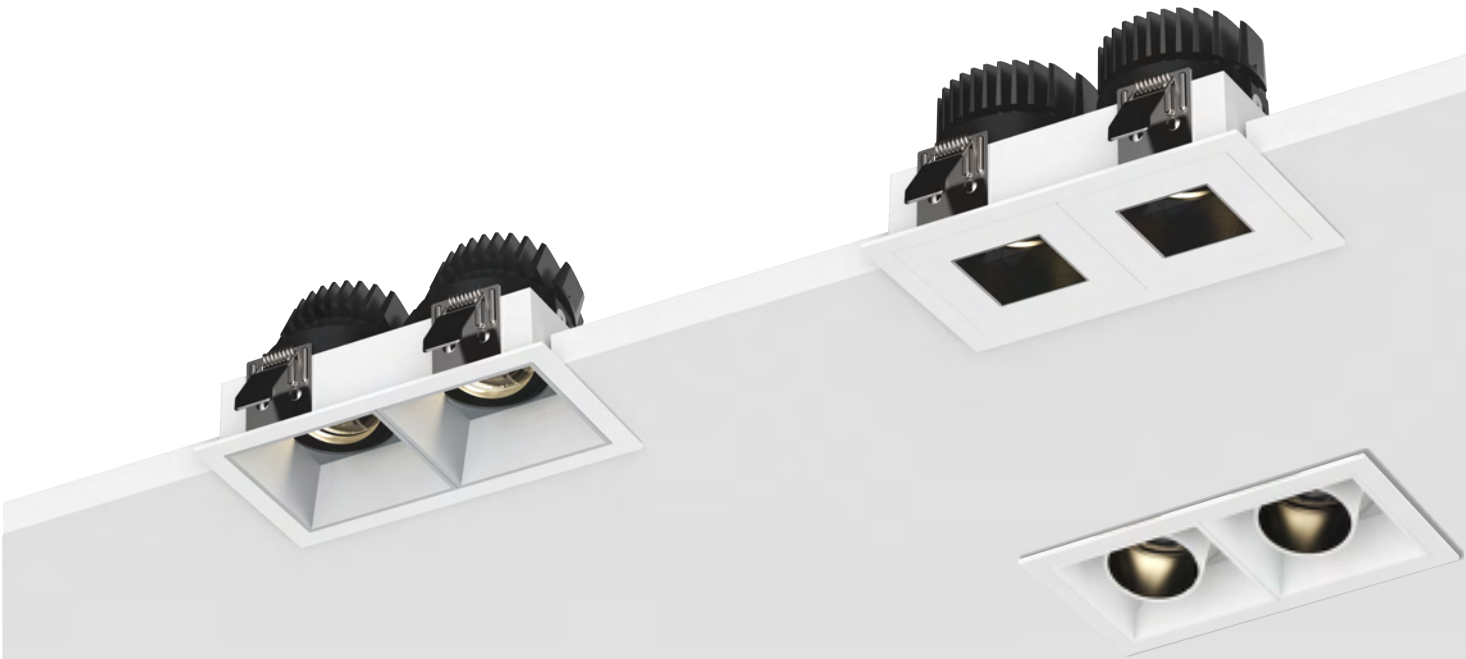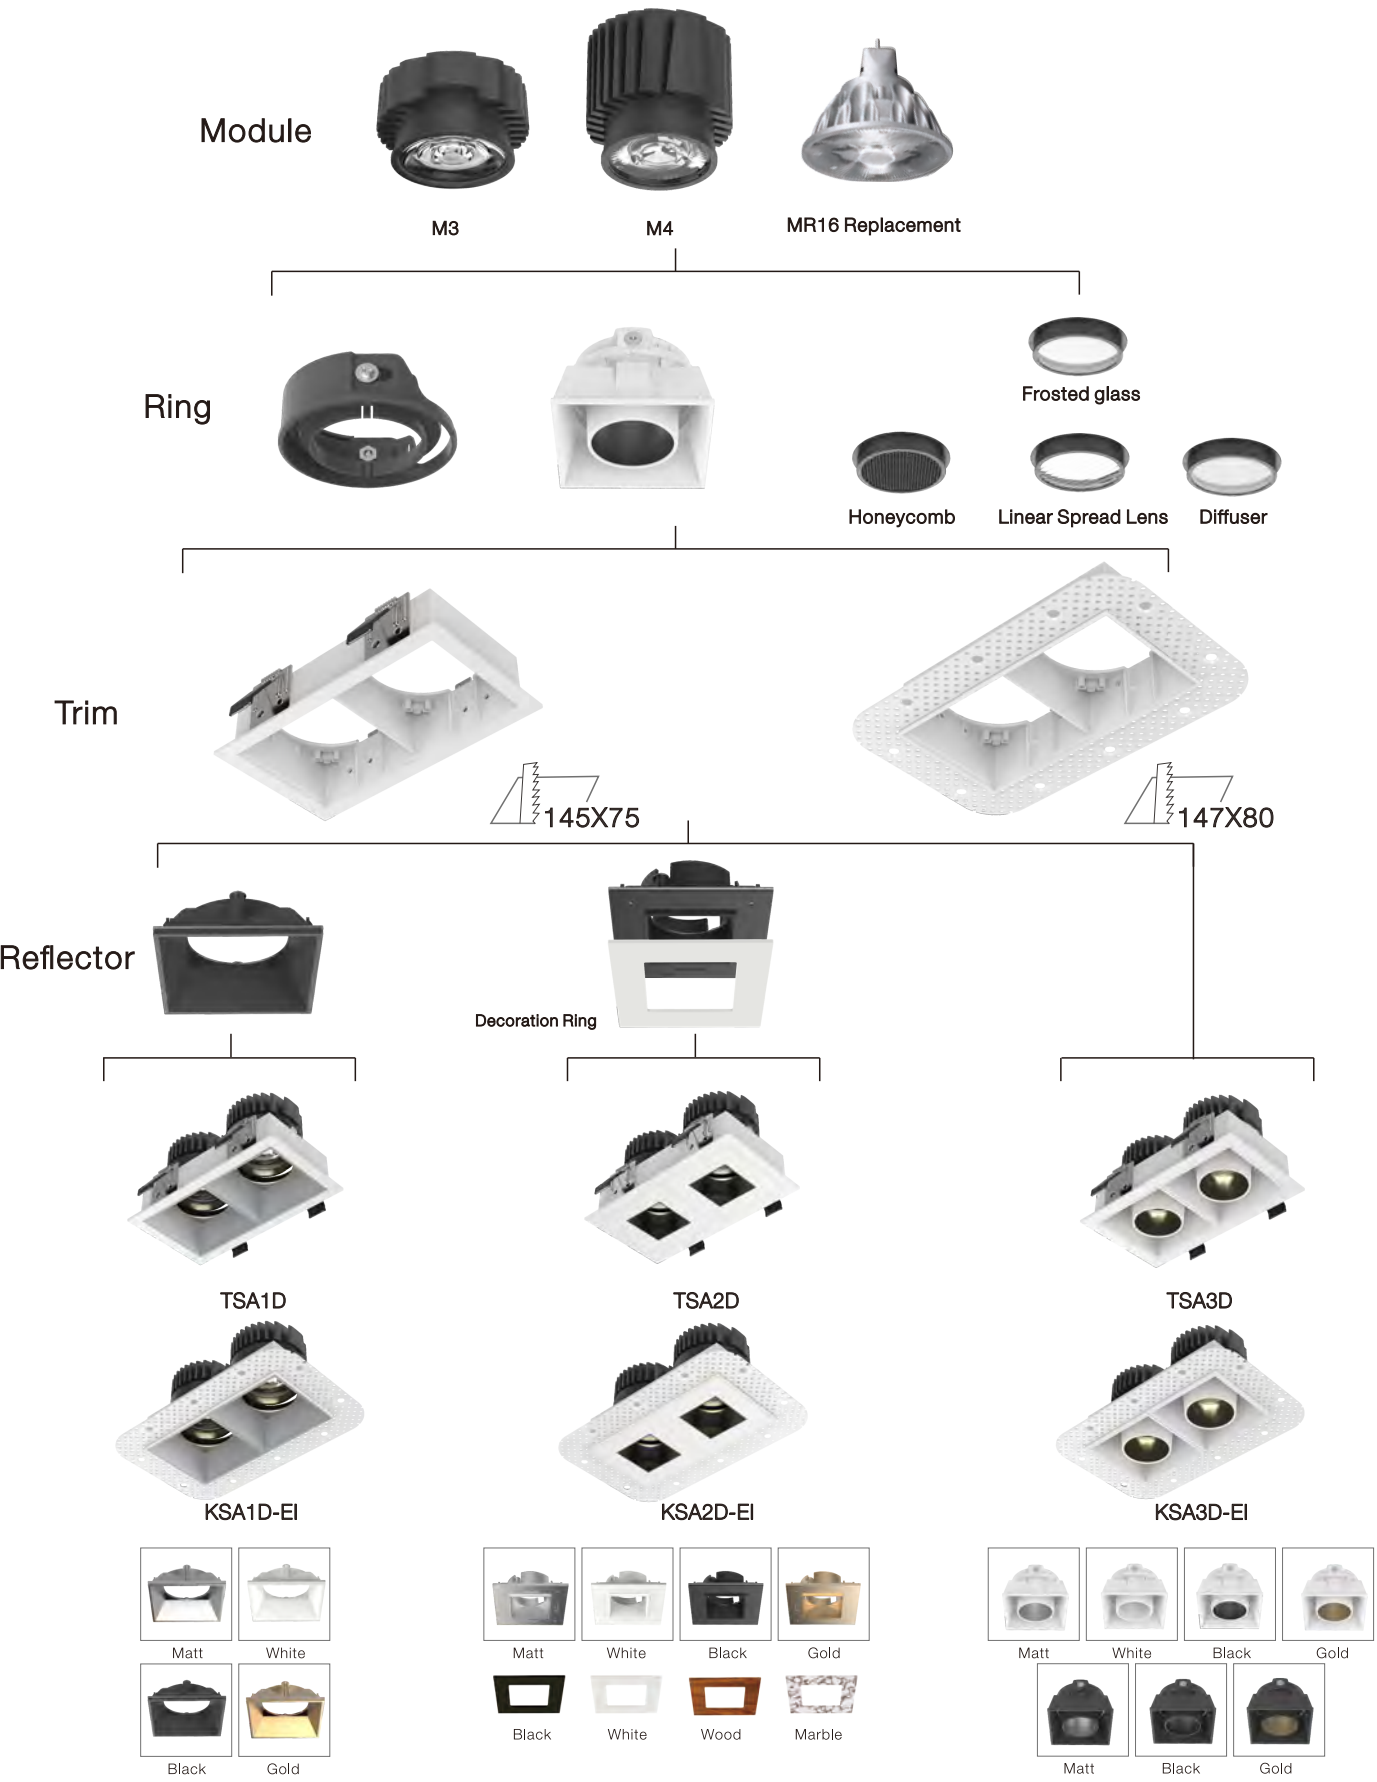

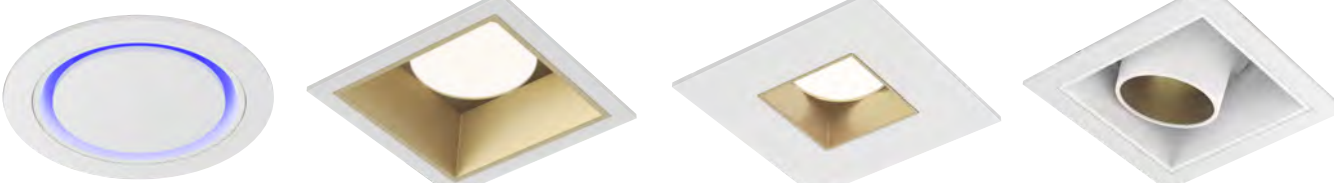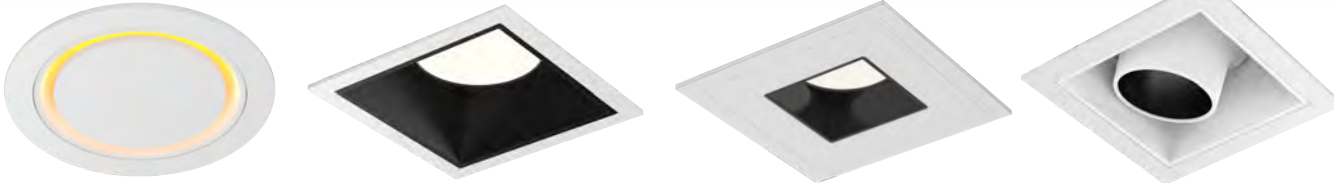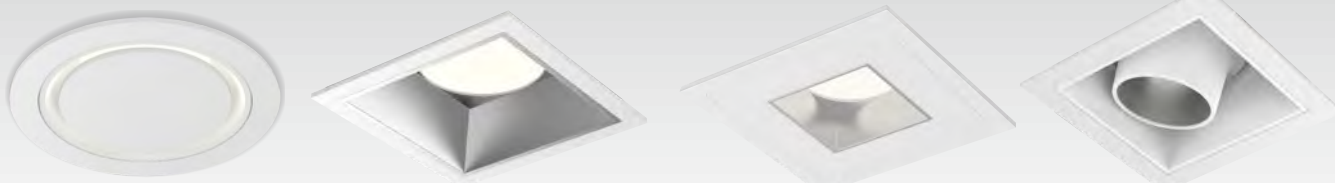

TA5

TA6

TA7


TA8

TA9




TSA1

TSA2


TSA3

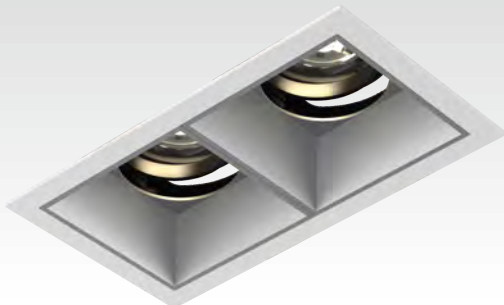

TSA1D

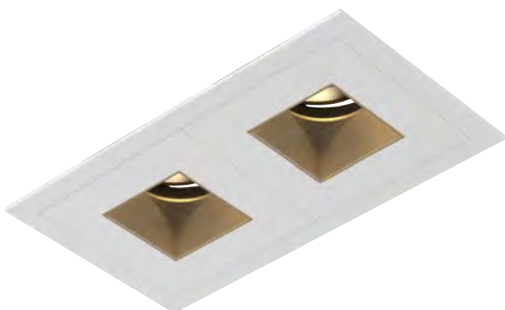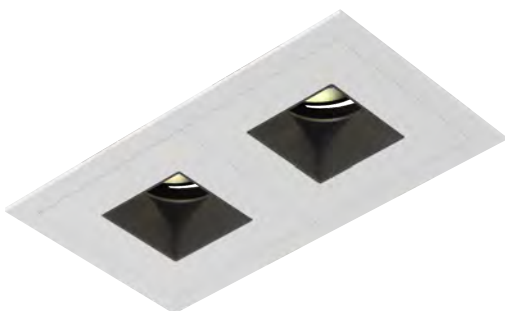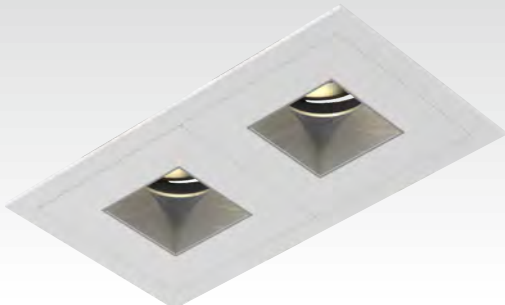


TSA2D

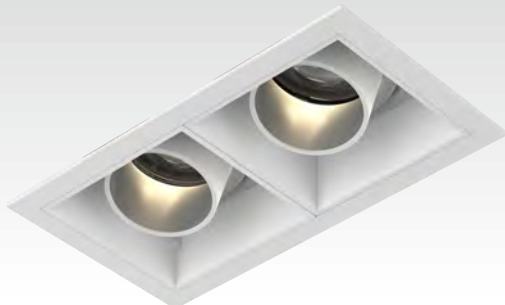

TSA3D





TA5-IP65





TSA1-IP44





KA5



KA8



KA9



KSA1



KSA1D-EI



KSA3



KSA2



KSA2D-EI



KSA3D-EI










KA6



KA7

Installation Trimless Trims

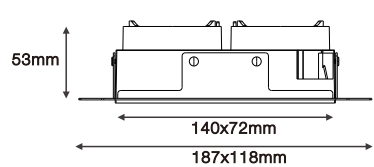


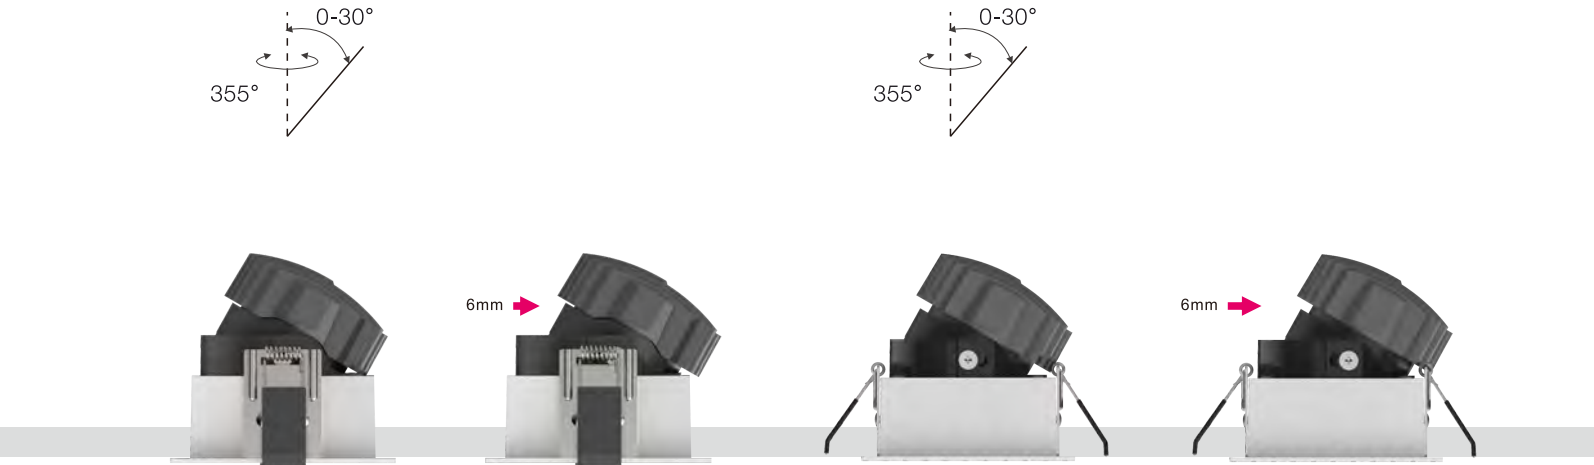


TSA1




TSA1D



75X75

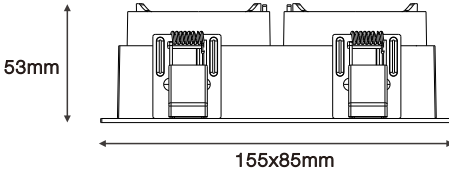


145X75

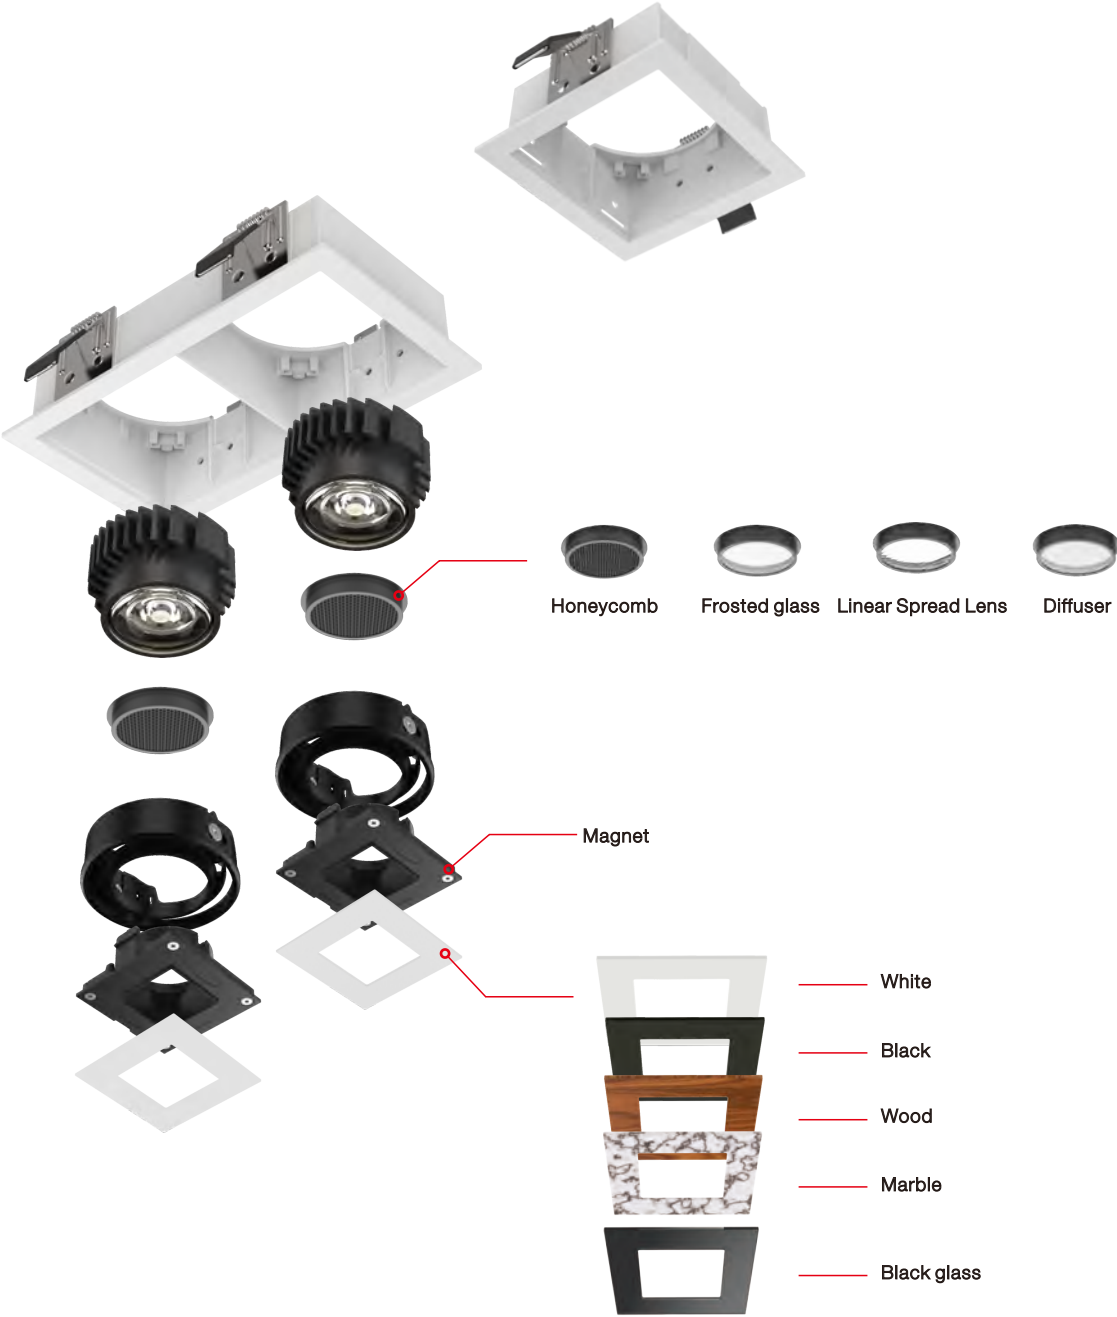


TSA2





TSA2D




75X75

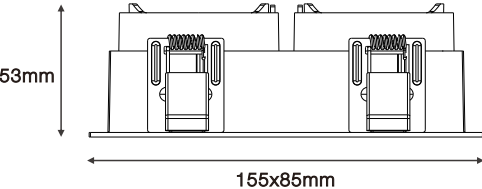

145X75

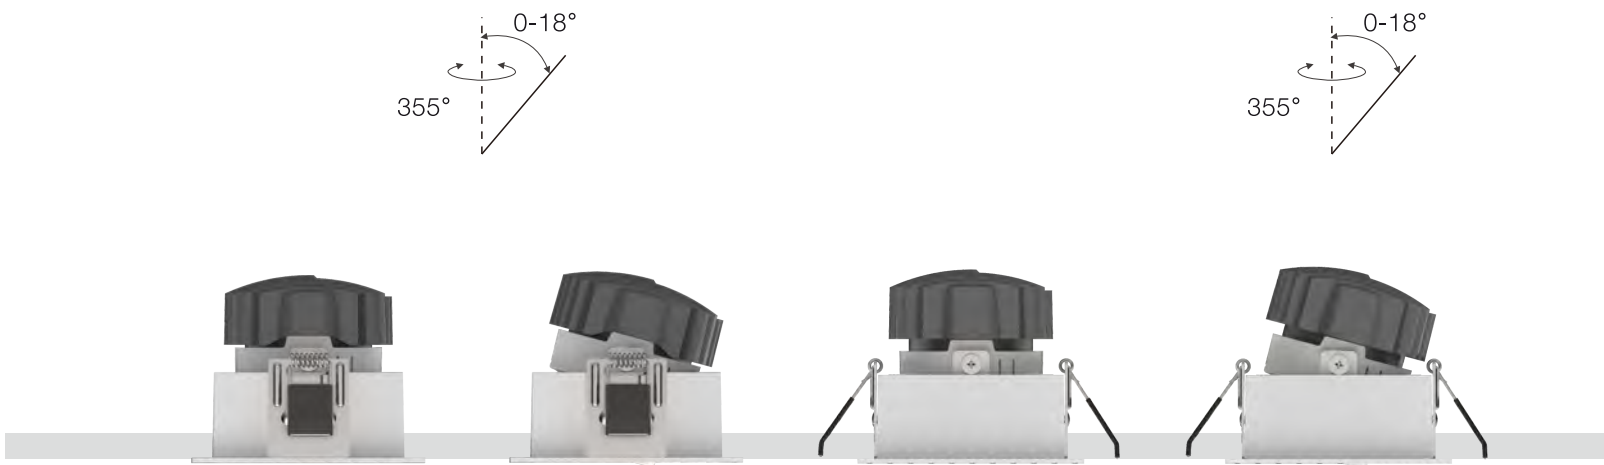

75X75

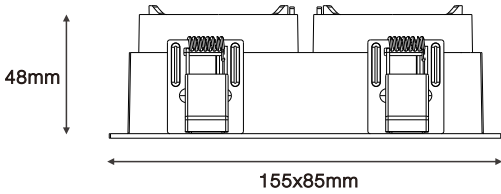

145X75

NEKO / CLUB
Trim Series

TA5



TA6



TA7



TA8



KA5-EI



KA6-EI



KA7-EI



KA8-EI



KA5



KA6



KA7





KA8






NEKO / CLUB
Trim Series


TA9





TSA1





TSA2



TSA3




KA9-EI





KSA1-EI





KSA2-EI





KSA3-EI





KA9





KSA1




KSA2



KSA3




TSA1D




M3/M4-TSA1D

KSA1D-EI

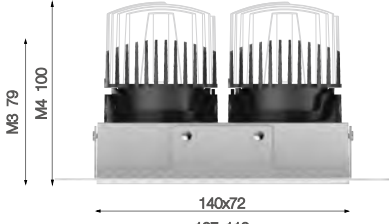


M3/M4-KSA1D-EI

TSA2D




M3/M4-TSA2D

KSA2D-EI

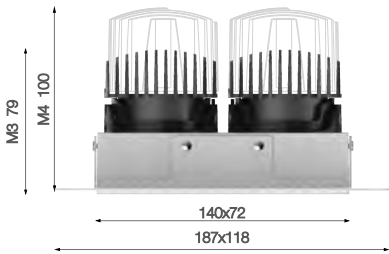


M3/M4-KSA2D-EI

TSA3D



M3/M4-TSA3D

KSA3D-EI

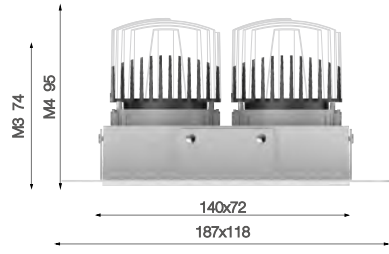

M3/M4-KSA3D-EI



Classic
SKYJACK A68 SJA1-9W



Recessed Architectural
SKYJACK D SJD-9W



IP65
SKYJACK F SJF-9W



Shop & Corridors
SKYJACK A145 SJA2-25W

NEKO / SKYJACK A68

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box

NEW



6W

CRI90

1800K-3000K
Dim to Warm

38°


±30°
Tilttable

bridgelux
50,000h@L80B10

IP44

5
GUARANTEE

CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	650lm	Max.450lm	SJA1-9D33806	P-WW




Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	650lm	Max.450lm	SJA1-9D33806	P-BB
-----	-----	------	--------	----	-----------------	-------	-----------	--------------	------



Code Remark: P=(Phase Dim)

Light Distribution



9W

CRI90

2700K
3000K

38°

±30°
Tilttable

bridgelux
50,000h@L80B10

IP44

5
GUARANTEE

CE



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	900lm	720lm 950lm	720lm 750lm	SJA1-9273809P-WW SJA1-9303809P-WW




Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	900lm	720lm 950lm	720lm 750lm	SJA1-9273809P-BB SJA1-9303809P-BB
-----	------	------	--------	----	------------------------	-------	----------------	----------------	--------------------------------------



Code Remark: P=(Phase Dim)

Light Distribution

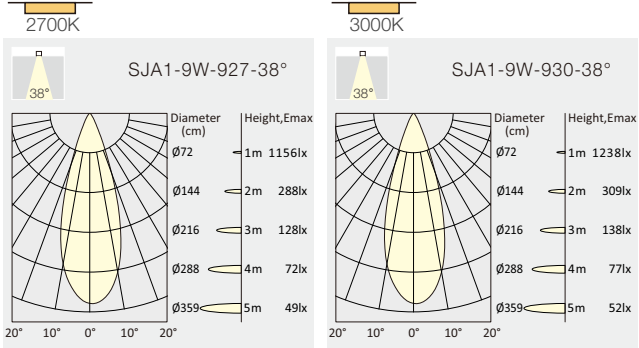

DIM to WARM

1800K

2700K

3000K



NEKO / SKYJACK D

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box

NEW



9W	CRI90	2700K 3000K	38° ±30° Tilttable	bridge l ux 50,000h@L80B10	UGR < 19	IP44		CE			
----	-------	----------------	--------------------------	--	-------------	------	--	----	--	--	--




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	38°	900lm 950lm	700lm 750lm	SJD-9273809P-WW SJD-9303809P-WW


Code Remark: P=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	38°	900lm 950lm	650lm 700lm	SJD-9273809P-BB SJD-9303809P-BB
-----	------	------	--------	----	------------------------	-----	----------------	----------------	------------------------------------

Code Remark: P=(Phase Dim)

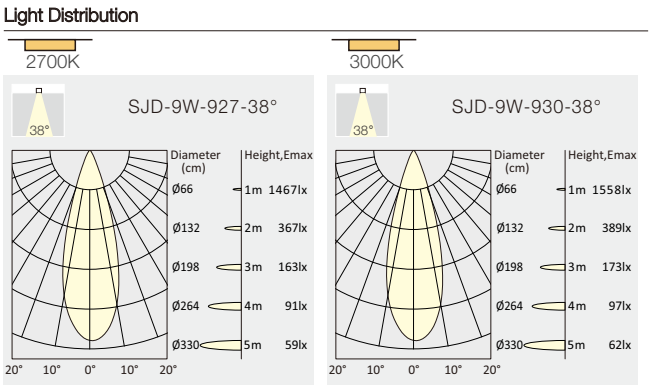

6W	CRI90	1800K-3000K Dim to Warm	38° ±30° Tilttable	bridge l ux 50,000h@L80B10	IP44		CE
----	-------	----------------------------	--------------------------	--	------	--	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	38°	650lm	Max.450lm	SJD-9D33806P-WW

Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	38°	650lm	Max.400lm	SJD-9D33806P-BB
-----	-----	------	--------	----	-----------------	-----	-------	-----------	-----------------

Code Remark: P=(Phase Dim)

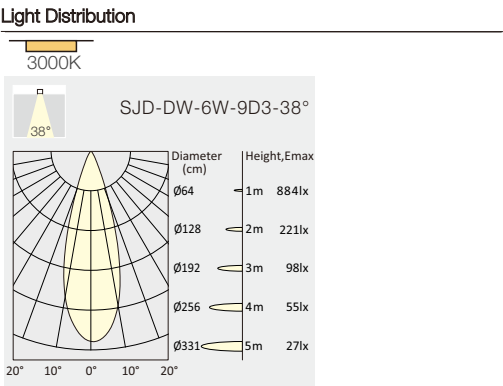



9W

CRI90

2700K
3000K

38°

bridgelux
50,000h@L80B10

IP65
PROTECTOR

5 YEAR
WARRANTY

CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38°		900lm	720lm	SJF-9273809P-WW
					3000K 38°		950lm	750lm	SJF-9303809P-WW

Code Remark: P=(Phase Dim)



9 W	11 W	18 V	500 mA	90	2700K 38°		900lm	720lm	SJF-9273809P-BB
					3000K 38°		950lm	750lm	SJF-9303809P-BB

Code Remark: P=(Phase Dim)

Light Distribution

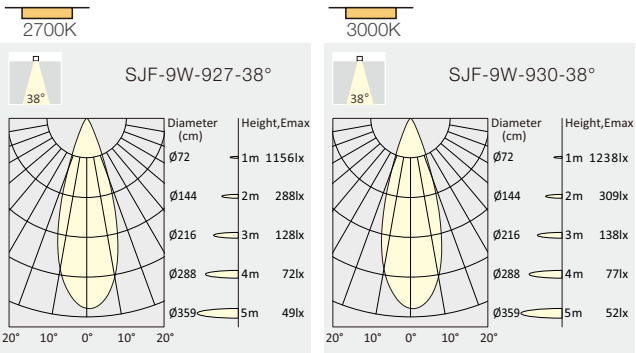



25W	CRI90	3000K	30°	 ±30° Tilttable	 bridgelux 50,000h@L80B10	UGR < 19	IP20	 5 GUARANTEES			 1-25mm Ceiling Thickness	 Ø158	92
-----	-------	-------	-----	--	---	--------------------	-------------	--	--	--	--	---	----


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Light Distribution

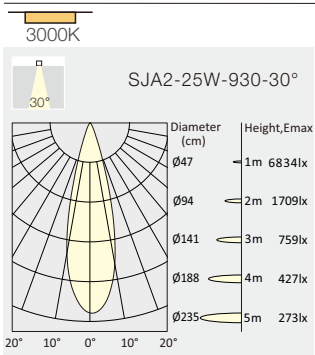



Slim & Powerful & IP54
SLIM 40-F-7.5W



Slim & Powerful & IP54
SLIM 40-A-7.5W



7.5W

CRI90

3000K

30°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

CE

40

1-25mm
Ceiling Thickness

90
Ø44

7.5W

CRI90

3000K

30°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

CE



40

1-25mm
Ceiling Thickness

90
Ø44


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4F-9303008N-WC
Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)									
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4F-9303008N-BC
Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)									

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4A-9303008N-WC
Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)									
7.5 W	9 W	36 V	200 mA	90	3000K	30°	700lm	500lm	SM4A-9303008N-BC
Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)									

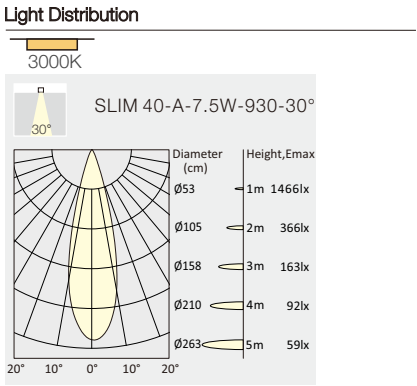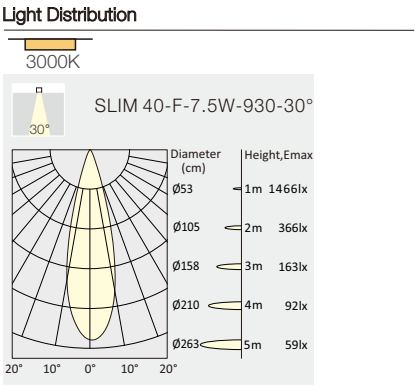



SIGN
Minimal LED Downlight

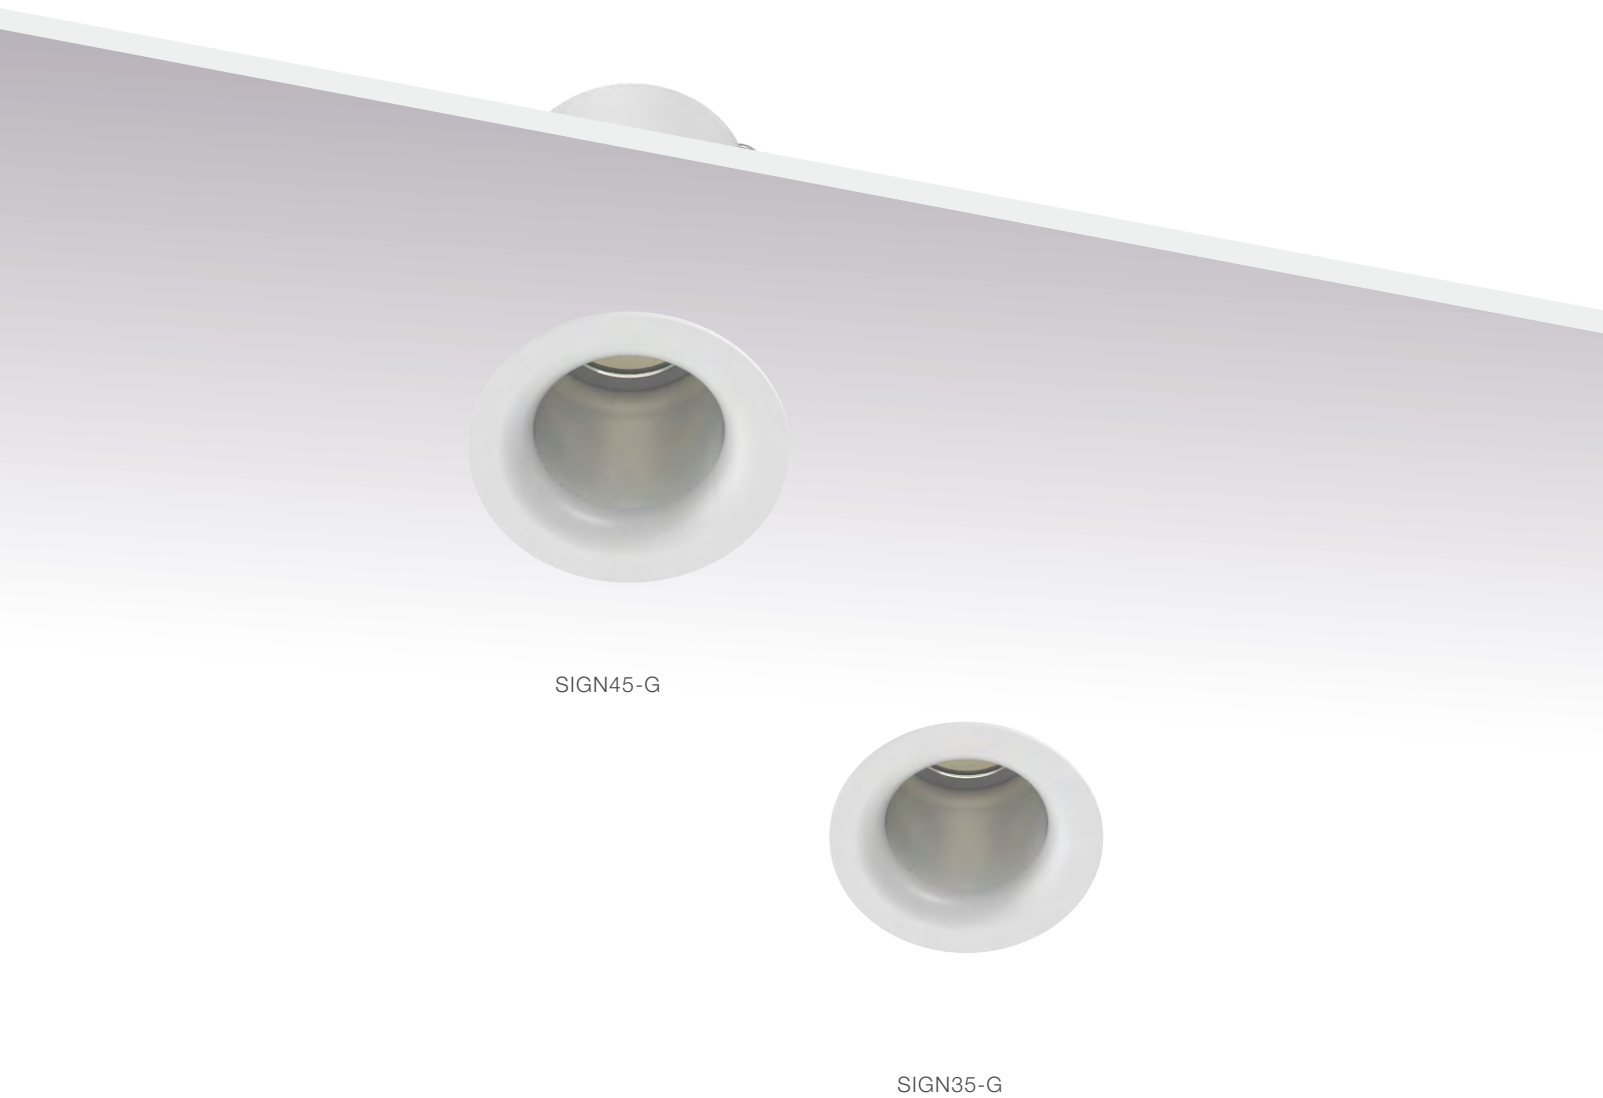

SIGN-G
Economic Version




Colour



NEKO / SIGN35-G

Minimal LED Downlight



1.5W	CRI80 CRI90	2700K 3000K 4000K		IP 20	UGR < 19	OSRAM 50,000h@L80B10		CE	CB			
LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
	1.5 W	2.5 W	3.2 V	500 mA	80	2700K	18°	140lm	100lm	S3G-8271802N-WN		
							30°	140lm	100lm	S3G-8273002N-WN		
							18°	150lm	110lm	S3G-8301802N-WN		
							30°	150lm	110lm	S3G-8303002N-WN		
							18°	160lm	120lm	S3G-8401802N-WN		
							30°	160lm	120lm	S3G-8403002N-WN		
					90	2700K	18°	120lm	85lm	S3G-9271802N-WN		
							30°	120lm	85lm	S3G-9273002N-WN		
							18°	130lm	95lm	S3G-9301802N-WN		
							30°	130lm	95lm	S3G-9303002N-WN		
							18°	140lm	105lm	S3G-9401802N-WN		
							30°	140lm	105lm	S3G-9403002N-WN		
	1.5 W	2.5 W	3.2 V	500 mA	80	2700K	18°	140lm	100lm	S3G-8271802N-BN		
							30°	140lm	100lm	S3G-8273002N-BN		
							18°	150lm	110lm	S3G-8301802N-BN		
							30°	150lm	110lm	S3G-8303002N-BN		
							18°	160lm	120lm	S3G-8401802N-BN		
							30°	160lm	120lm	S3G-8403002N-BN		
					90	2700K	18°	120lm	85lm	S3G-9271802N-BN		
							30°	120lm	85lm	S3G-9273002N-BN		
							18°	130lm	95lm	S3G-9301802N-BN		
							30°	130lm	95lm	S3G-9303002N-BN		
							18°	140lm	105lm	S3G-9401802N-BN		
							30°	140lm	105lm	S3G-9403002N-BN		

Code Remark: N=(NO Driver) F=(ON-OFF)


Features





·Easy for installation

NEKO / SIGN45-G

Minimal LED Downlight



6W	CRI80 CRI90	2700K 3000K 4000K		IP 20	UGR < 19	 50,000h@L80B10							
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code													
	6 W	8 W	18 V	350 mA	80	2700K	30°	520lm	400lm	S4G-8273006N-WN			
						3000K	30°	550lm	420lm	S4G-8303006N-WN			
						4000K	30°	600lm	450lm	S4G-8403006N-WN			
						90	2700K	30°	450lm	350lm	S4G-9273006N-WN		
						3000K	30°	480lm	370lm	S4G-9303006N-WN			
						4000K	30°	520lm	400lm	S4G-9403006N-WN			
	6 W	8 W	18 V	350 mA	80	2700K	30°	520lm	400lm	S4G-8273006N-BN			
						3000K	30°	550lm	420lm	S4G-8303006N-BN			
						4000K	30°	600lm	450lm	S4G-8403006N-BN			
						90	2700K	30°	450lm	350lm	S4G-9273006N-BN		
						3000K	30°	480lm	370lm	S4G-9303006N-BN			
						4000K	30°	520lm	400lm	S4G-9403006N-BN			
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)													

Features



·Easy for installation




K1X30



K1X55



K1X70



NEKO / KENZO / K1X30
Adjustable LED Spotlight



Black Decoration Ring



White Decoration Ring



Gold Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB
					2700K	15°	350lm	300lm	K1S-9271504N-WW
						30°	350lm	300lm	K1S-9273004N-WW
						55°	350lm	300lm	K1S-9275504N-WW
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WG
						30°	350lm	300lm	K1S-9273004N-WG
						55°	350lm	300lm	K1S-9275504N-WG
					3000K	15°	400lm	320lm	K1S-9301504N-WG
						30°	400lm	320lm	K1S-9303004N-WG
						55°	400lm	320lm	K1S-9305504N-WG
					4000K	15°	450lm	350lm	K1S-9401504N-WG
						30°	450lm	350lm	K1S-9403004N-WG
						55°	450lm	350lm	K1S-9405504N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

NEKO / KENZO / K1X55
Adjustable LED Spotlight



Black Decoration Ring



White Decoration Ring



Gold Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB
					2700K	18°	850lm	700lm	K1M-9271809N-WW
						24°	850lm	700lm	K1M-9272409N-WW
						36°	850lm	700lm	K1M-9273609N-WW
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WG
						24°	850lm	700lm	K1M-9272409N-WG
						36°	850lm	700lm	K1M-9273609N-WG
					3000K	18°	950lm	720lm	K1M-9301809N-WG
						24°	950lm	720lm	K1M-9302409N-WG
						36°	950lm	720lm	K1M-9303609N-WG
					4000K	18°	1050lm	800lm	K1M-9401809N-WG
						24°	1050lm	800lm	K1M-9402409N-WG
						36°	1050lm	800lm	K1M-9403609N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory




Code for K1M-9402409N-WG with Honeycomb
K1M-9402409N-WG -H

Honeycomb

NEKO / KENZO / K1X70
Adjustable LED Spotlight



13W	CRI90	2700K			UGR < 19	IP20		CB	CE
18W	CRI80	3000K							
		4000K							



Black Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB					
						25°	1400lm	1100lm	K1L1-9272513N-WB					
						30°	1400lm	1100lm	K1L1-9273013N-WB					
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WB					
						25°	1500lm	1200lm	K1L1-9302513N-WB					
						30°	1500lm	1200lm	K1L1-9303013N-WB					
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WB					
						25°	1600lm	1300lm	K1L1-9402513N-WB					
						30°	1600lm	1300lm	K1L1-9403013N-WB					
					18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
											25°	1800lm	1500lm	K1L2-9272518N-WB
											30°	1800lm	1500lm	K1L2-9273018N-WB
3000K	15°	2000lm	1600lm	K1L2-9301518N-WB										
	25°	2000lm	1600lm	K1L2-9302518N-WB										
	30°	2000lm	1600lm	K1L2-9303018N-WB										
4000K	15°	2200lm	1700lm	K1L2-9401518N-WB										
	25°	2200lm	1700lm	K1L2-9402518N-WB										
	30°	2200lm	1700lm	K1L2-9403018N-WB										

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



White Decoration Ring



Gold Decoration Ring

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WW						
						25°	1400lm	1100lm	K1L1-9272513N-WW						
						30°	1400lm	1100lm	K1L1-9273013N-WW						
						3000K	15°	1500lm	1200lm	K1L1-9301513N-WW					
							25°	1500lm	1200lm	K1L1-9302513N-WW					
							30°	1500lm	1200lm	K1L1-9303013N-WW					
						4000K	15°	1600lm	1300lm	K1L1-9401513N-WW					
							25°	1600lm	1300lm	K1L1-9402513N-WW					
							30°	1600lm	1300lm	K1L1-9403013N-WW					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WW
												25°	1800lm	1500lm	K1L2-9272518N-WW
												30°	1800lm	1500lm	K1L2-9273018N-WW
3000K	15°	2000lm	1600lm	K1L2-9301518N-WW											
	25°	2000lm	1600lm	K1L2-9302518N-WW											
	30°	2000lm	1600lm	K1L2-9303018N-WW											
4000K	15°	2200lm	1700lm	K1L2-9401518N-WW											
	25°	2200lm	1700lm	K1L2-9402518N-WW											
	30°	2200lm	1700lm	K1L2-9403018N-WW											

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WG
						25°	1400lm	1100lm	K1L1-9272513N-WG
						30°	1400lm	1100lm	K1L1-9273013N-WG
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WG
						25°	1500lm	1200lm	K1L1-9302513N-WG
						30°	1500lm	1200lm	K1L1-9303013N-WG
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WG
						25°	1600lm	1300lm	K1L1-9402513N-WG
						30°	1600lm	1300lm	K1L1-9403013N-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WG
						25°	1800lm	1500lm	K1L2-9272518N-WG
						30°	1800lm	1500lm	K1L2-9273018N-WG
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WG
						25°	2000lm	1600lm	K1L2-9302518N-WG
						30°	2000lm	1600lm	K1L2-9303018N-WG
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WG
						25°	2200lm	1700lm	K1L2-9402518N-WG
						30°	2200lm	1700lm	K1L2-9403018N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Honeycomb

Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H


Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION

- Hohe Lichtplanungsflexibilität mit verschiedenen Grössen von Lichtmodulen
- Schmale LED-Downlights für reinen Minimalismus
- Bester Blendschutz mit hoher Leistung und gutem Sehkomfort
- Fix und schwenkbar, Wall Washer, Allgemeinbeleuchtung, Spot und rahmenlose Version verfügbar
- 5 Jahre Garantie

- Create a circle of light from a line of LED Downlights
- A narrow line of nano LED Downlights for pure minimalism
- Superior glare control for high performance and visual comfort
- Fixed, Adjustable, Wall Washer, General light, Spotlight and trimless versions for choice
- Five-year guarantee

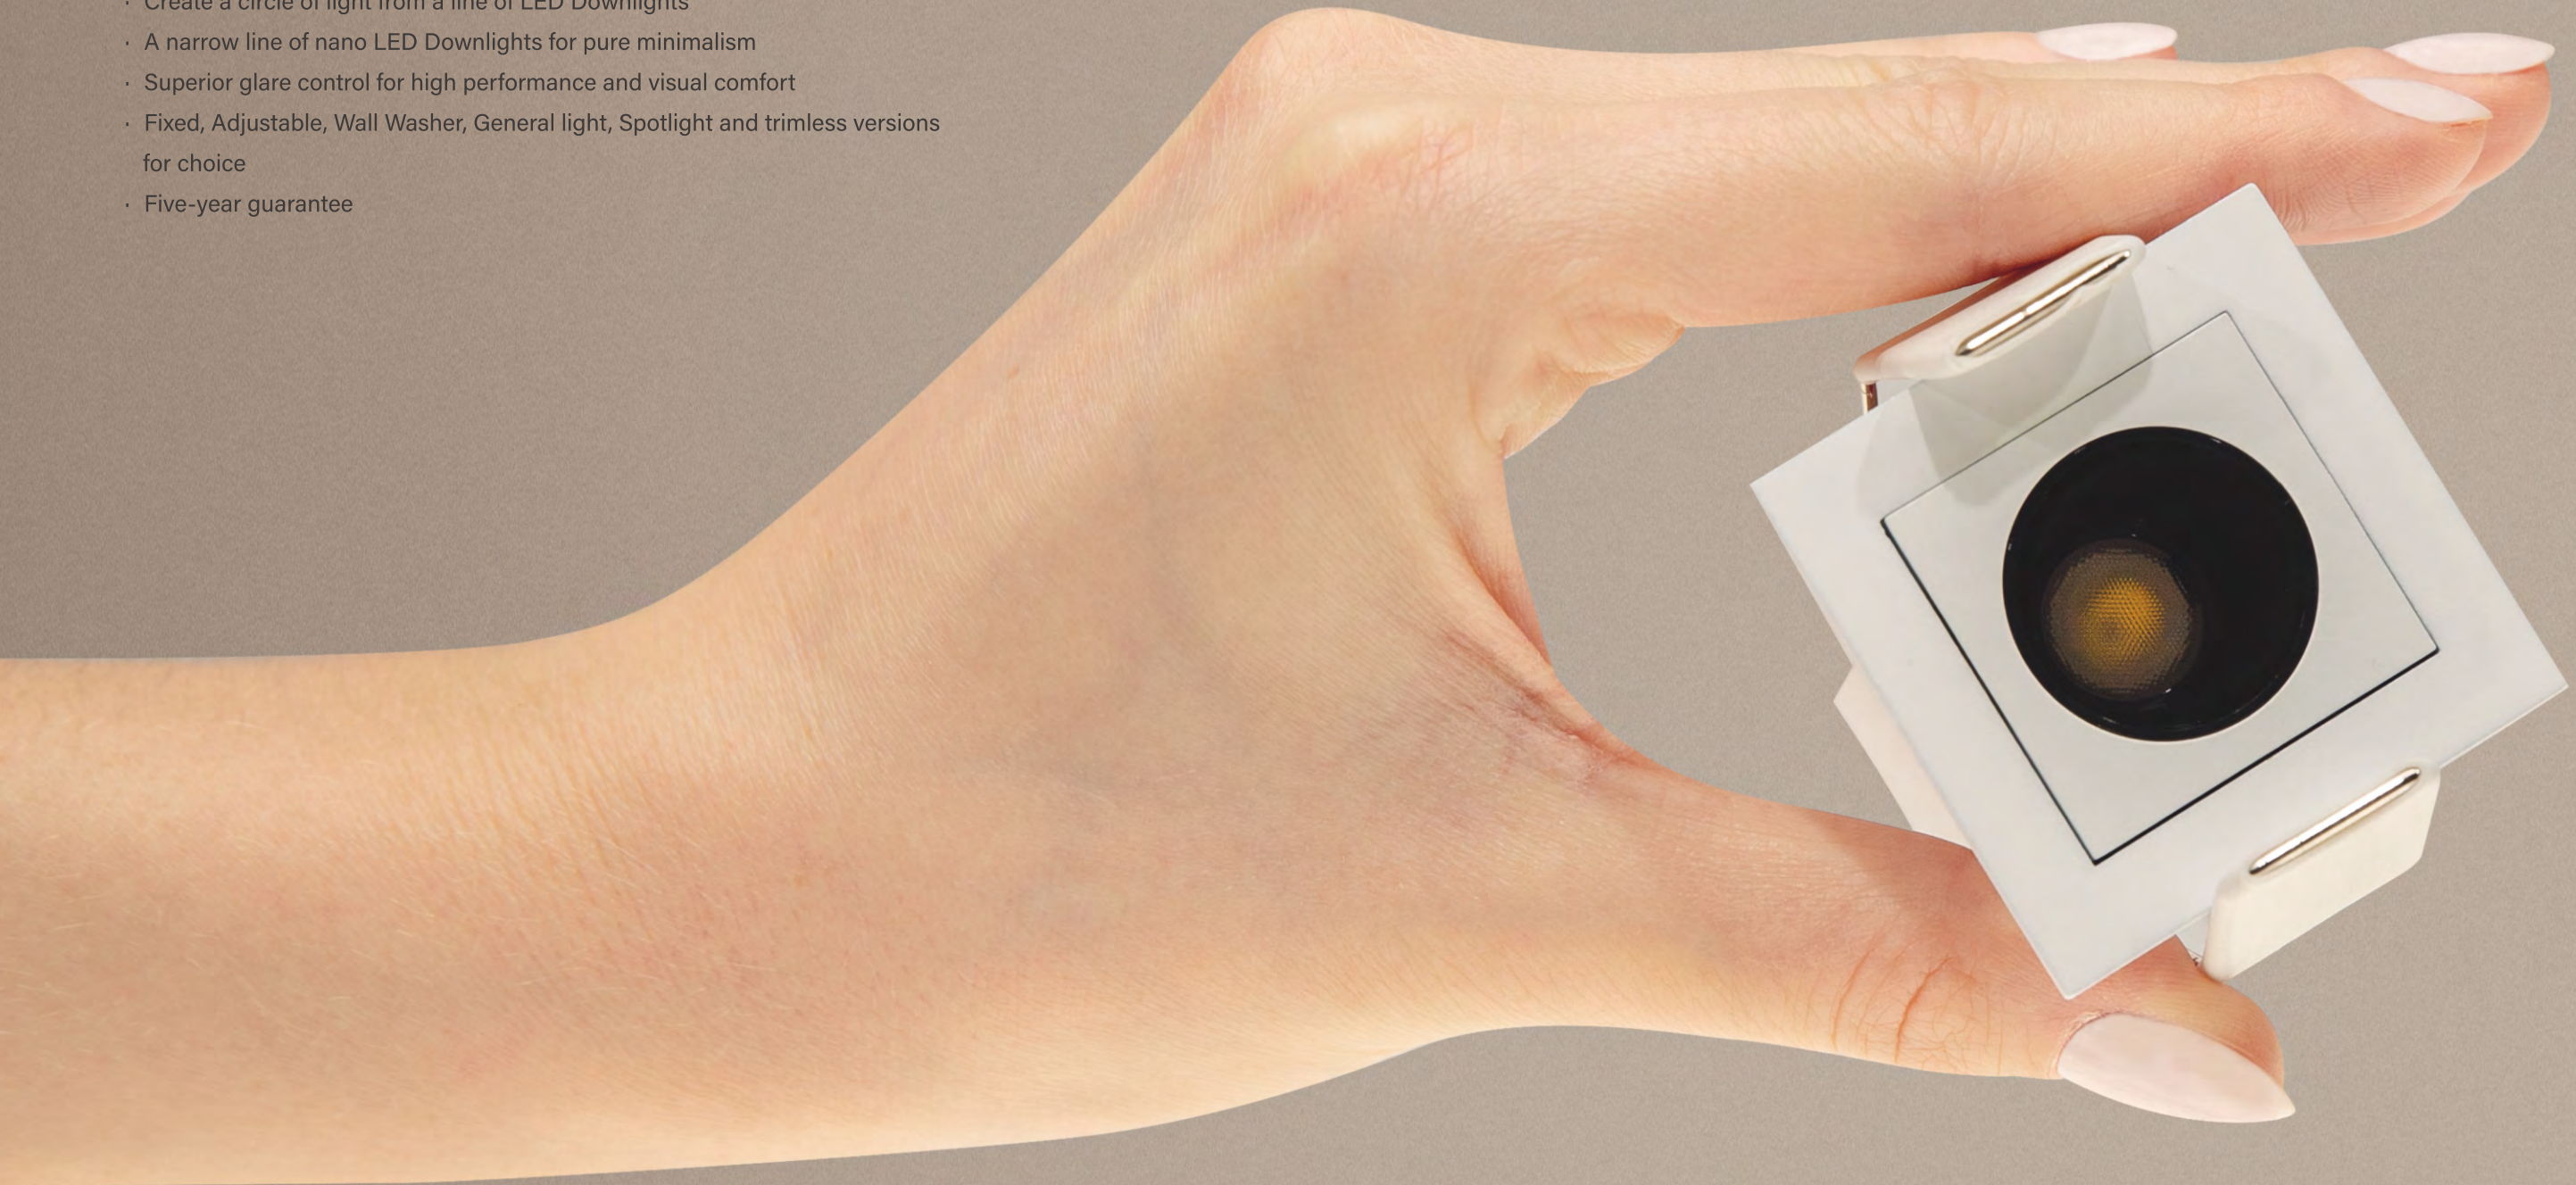

Fixed




Adjustable

Wall Washer



General Light

Spotlight

Trimless

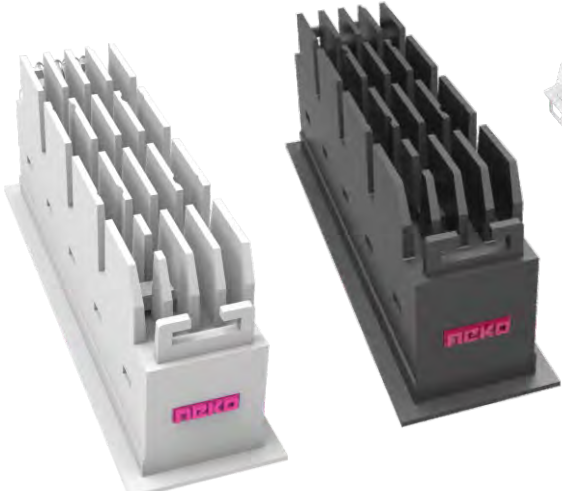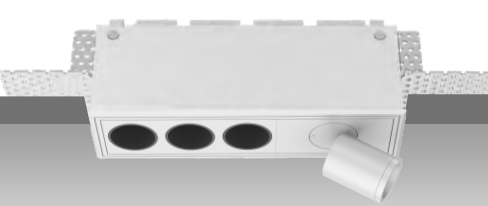

Secondary Reflector



Black


Specular

Beam



Medium 24°


Wide 40°

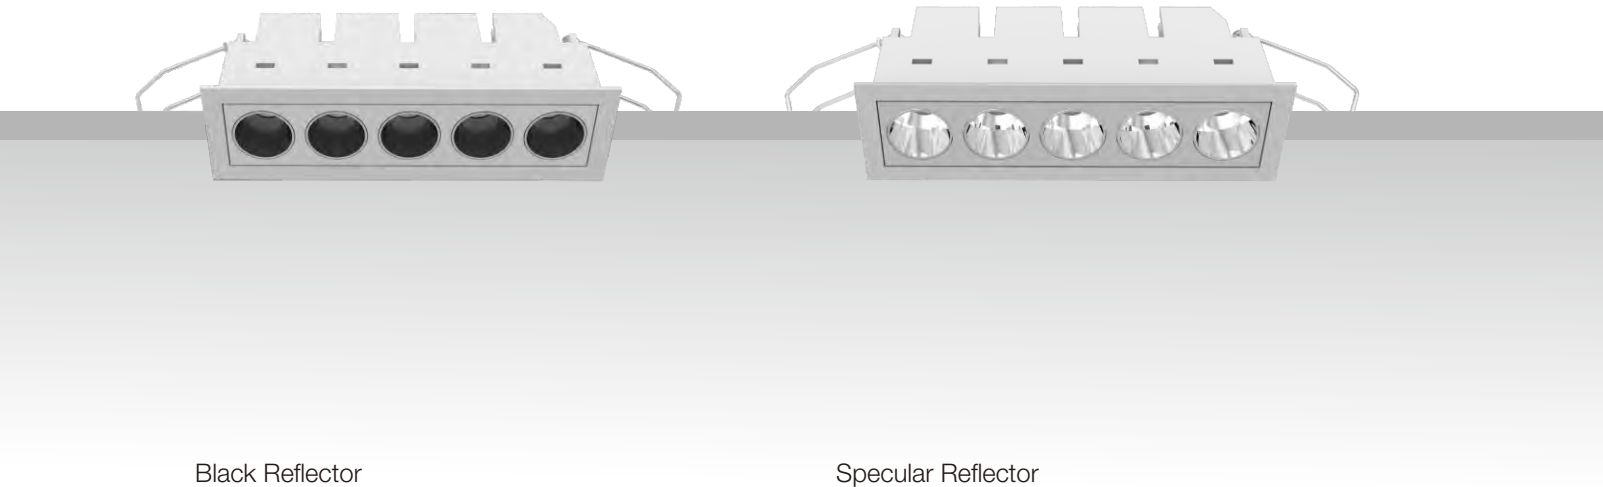


Black Reflector



Secondary Reflector




Black




Specular


Specular Reflector




Beam



Medium 24°




Wide 40°

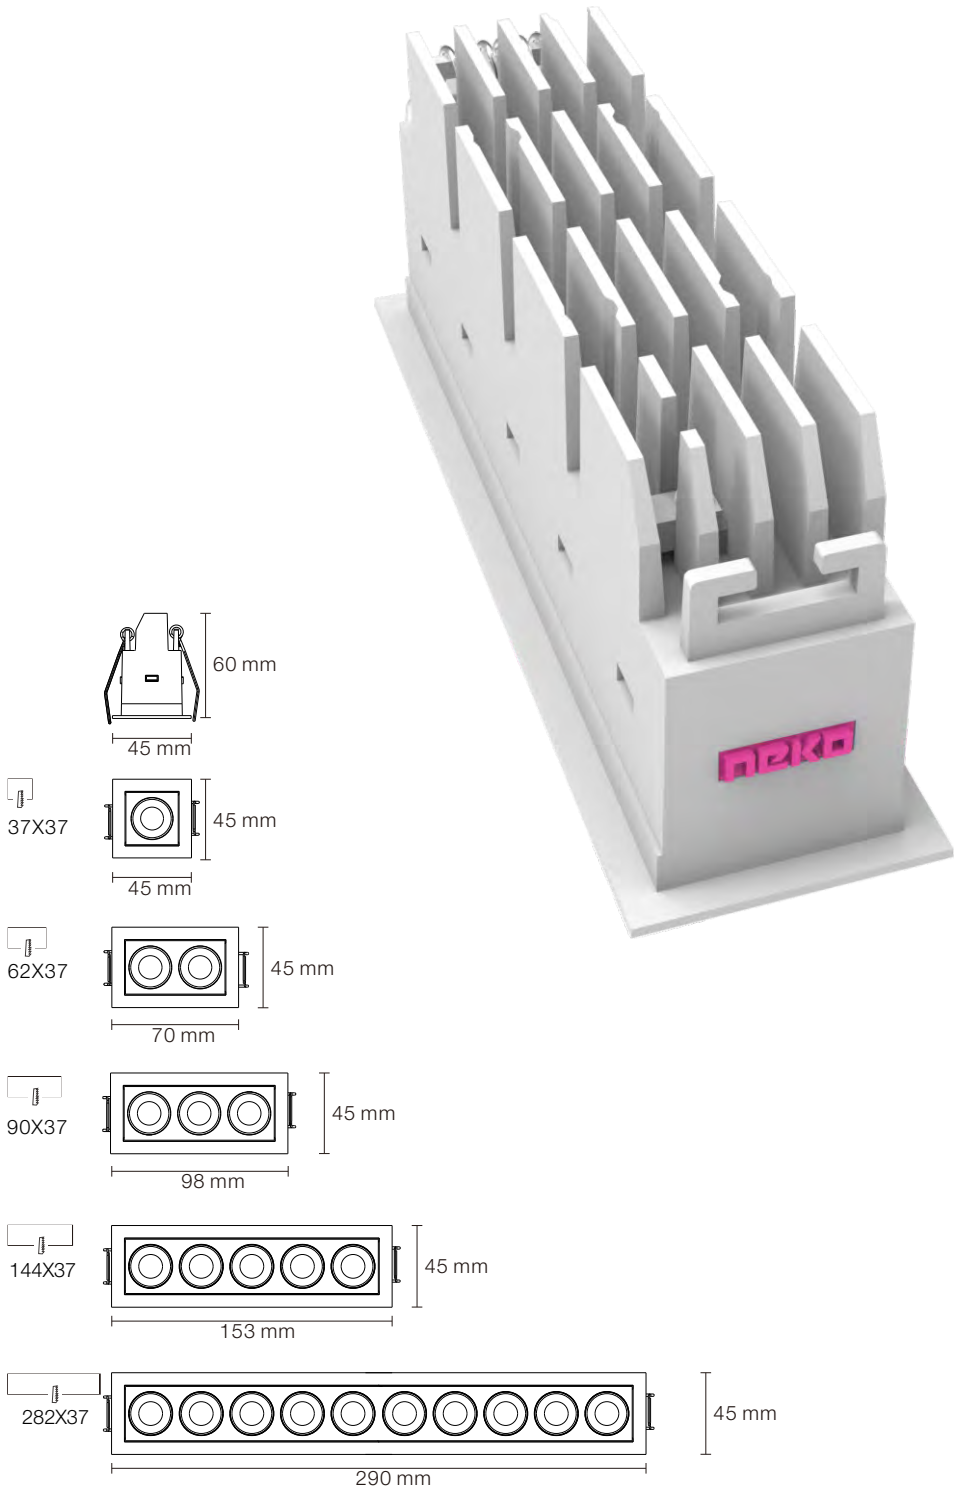



Project: Muyang Museum, China

2W	CR190 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20	5 GUARANTEED	CB	CE	ETL Intertek
----	----------------	-------------------------	------------	-------------------------	-------------	-------	-----------------	----	----	-----------------



	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
	2	W	3	W	3	V	700	mA	80	2700K	24°	220lm	160lm	FF1-8272402N-WB	
											40°	220lm	160lm	FF1-8274002N-WB	
											3000K	24°	250lm	170lm	FF1-8302402N-WB
												40°	250lm	170lm	FF1-8304002N-WB
											4000K	24°	280lm	180lm	FF1-8402402N-WB
												40°	280lm	180lm	FF1-8404002N-WB
Black Reflector	-----														
	2	W	3	W	3	V	700	mA	80	2700K	24°	220lm	160lm	FF1-8272402N-BB	
											40°	220lm	160lm	FF1-8274002N-BB	
											3000K	24°	250lm	170lm	FF1-8302402N-BB
												40°	250lm	170lm	FF1-8304002N-BB
											4000K	24°	280lm	180lm	FF1-8402402N-BB
												40°	280lm	180lm	FF1-8404002N-BB
Black Reflector	-----														
	2	W	3	W	3	V	700	mA	80	2700K	24°	220lm	180lm	FF1-8272402N-WS	
											40°	220lm	180lm	FF1-8274002N-WS	
											3000K	24°	250lm	200lm	FF1-8302402N-WS
												40°	250lm	200lm	FF1-8304002N-WS
											4000K	24°	280lm	220lm	FF1-8402402N-WS
												40°	280lm	220lm	FF1-8404002N-WS
Specular Reflector	-----														
	2	W	3	W	3	V	700	mA	80	2700K	24°	220lm	180lm	FF1-8272402N-BS	
											40°	220lm	180lm	FF1-8274002N-BS	
											3000K	24°	250lm	200lm	FF1-8302402N-BS
												40°	250lm	200lm	FF1-8304002N-BS
											4000K	24°	280lm	220lm	FF1-8402402N-BS
												40°	280lm	220lm	FF1-8404002N-BS
Specular Reflector	-----														

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION / FF2
Fixed LED Downlight



Project: Bvlgari Hotel, Shanghai, China

4W

CRI90
CRI80

2700K
3000K
4000K

24°
40°

OSRAM
50,000h@L80B10

UGR
< 10

IP20

5

YEARS

GUARANTEE

CB

CE

ETL

Intertek

62x37

1-25mm

Ceiling Thickness

60

70x45



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-WB						
						40°	450lm	330lm	FF2-8274004N-WB						
						3000K	24°	500lm	350lm	FF2-8302404N-WB					
							40°	500lm	350lm	FF2-8304004N-WB					
						4000K	24°	550lm	380lm	FF2-8402404N-WB					
							40°	550lm	380lm	FF2-8404004N-WB					

						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-BB
40°	450lm	330lm	FF2-8274004N-BB												
3000K	24°	500lm	350lm	FF2-8302404N-BB											
	40°	500lm	350lm	FF2-8304004N-BB											
4000K	24°	550lm	380lm	FF2-8402404N-BB											
	40°	550lm	380lm	FF2-8404004N-BB											

4 W	6 W	6 V	700 mA	80	2700K							24°	450lm	380lm	FF2-8272404N-WS
						40°	450lm	380lm	FF2-8274004N-WS						
						3000K	24°	500lm	400lm	FF2-8302404N-WS					
							40°	500lm	400lm	FF2-8304004N-WS					
						4000K	24°	550lm	440lm	FF2-8402404N-WS					
							40°	550lm	440lm	FF2-8404004N-WS					

						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-BS
40°	450lm	380lm	FF2-8274004N-BS												
3000K	24°	500lm	400lm	FF2-8302404N-BS											
	40°	500lm	400lm	FF2-8304004N-BS											
4000K	24°	550lm	440lm	FF2-8402404N-BS											
	40°	550lm	440lm	FF2-8404004N-BS											

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)




NEKO / FUSION / FF3
Fixed LED Downlight



Project: Hallunda Station, Sweden

7W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20	5 YEARS GUARANTEE	CB	CE	ETL Intertek
----	----------------	-------------------------	------------	-------------------------	-------------	------	-------------------------	----	----	-----------------



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-WB	
						40°	700lm	500lm	FF3-8274007N-WB	
					3000K	24°	750lm	550lm	FF3-8302407N-WB	
						40°	750lm	550lm	FF3-8304007N-WB	
					4000K	24°	800lm	600lm	FF3-8402407N-WB	
						40°	800lm	600lm	FF3-8404007N-WB	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-BB	
						40°	700lm	500lm	FF3-8274007N-BB	
					3000K	24°	750lm	550lm	FF3-8302407N-BB	
						40°	750lm	550lm	FF3-8304007N-BB	
					4000K	24°	800lm	600lm	FF3-8402407N-BB	
						40°	800lm	600lm	FF3-8404007N-BB	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-WS	
						40°	700lm	550lm	FF3-8274007N-BS	
					3000K	24°	750lm	600lm	FF3-8302407N-WS	
						40°	750lm	600lm	FF3-8304007N-WS	
					4000K	24°	800lm	650lm	FF3-8402407N-WS	
						40°	800lm	650lm	FF3-8404007N-WS	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-BS	
						40°	700lm	550lm	FF3-8274007N-BS	
					3000K	24°	750lm	600lm	FF3-8302407N-BS	
						40°	750lm	600lm	FF3-8304007N-BS	
					4000K	24°	800lm	650lm	FF3-8402407N-BS	
						40°	800lm	650lm	FF3-8404007N-BS	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION /FX4
Fixed LED Downlight



9W CRI90 2700K 24° OSRAM UGR IP20 5 YEARS GUARANTEE CB CE



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-WB	
						40°	850lm	670lm	FX4-8274009N-WB	
					3000K	24°	900lm	700lm	FX4-8302409N-WB	
						40°	900lm	700lm	FX4-8304009N-WB	
					4000K	24°	1000lm	750lm	FX4-8402409N-WB	
						40°	1000lm	750lm	FX4-8404009N-WB	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-BB	
						40°	850lm	670lm	FX4-8274009N-BB	
					3000K	24°	900lm	700lm	FX4-8302409N-BB	
						40°	900lm	700lm	FX4-8304009N-BB	
					4000K	24°	1000lm	750lm	FX4-8402409N-BB	
						40°	1000lm	750lm	FX4-8404009N-BB	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-WS	
						40°	850lm	700lm	FX4-8274009N-WS	
					3000K	24°	900lm	750lm	FX4-8302409N-WS	
						40°	900lm	750lm	FX4-8304009N-WS	
					4000K	24°	1000lm	800lm	FX4-8402409N-WS	
						40°	1000lm	800lm	FX4-8404009N-WS	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-BS	
						40°	850lm	700lm	FX4-8274009N-BS	
					3000K	24°	900lm	750lm	FX4-8302409N-BS	
						40°	900lm	750lm	FX4-8304009N-BS	
					4000K	24°	1000lm	800lm	FX4-8402409N-BS	
						40°	1000lm	800lm	FX4-8404009N-BS	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Project: Office Helsinki, Finland




NEKO / FUSION / FF5
Fixed LED Downlight



Project: World Health Organization Building, Philippines

11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20	5 YEARS GUARANTEE	CB	CE	ETL Intertek
-----	----------------	-------------------------	------------	-------------------------	-------------	-------	-------------------------	----	----	-----------------



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-WB	
						40°	1200lm	850lm	FF5-8274011N-WB	
						3000K	24°	1300lm	900lm	FF5-8302411N-WB
					40°	1300lm	900lm	FF5-8304011N-WB		
					4000K	24°	1400lm	950lm	FF5-8402411N-WB	
						40°	1400lm	950lm	FF5-8404011N-WB	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-BB	
						40°	1200lm	850lm	FF5-8274011N-BB	
						3000K	24°	1300lm	900lm	FF5-8302411N-BB
					40°	1300lm	900lm	FF5-8304011N-BB		
					4000K	24°	1400lm	950lm	FF5-8402411N-BB	
						40°	1400lm	950lm	FF5-8404011N-BB	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-WS	
						40°	1200lm	950lm	FF5-8274011N-WS	
						3000K	24°	1300lm	1000lm	FF5-8302411N-WS
					40°	1300lm	1000lm	FF5-8304011N-WS		
					4000K	24°	1400lm	1100lm	FF5-8402411N-WS	
						40°	1400lm	1100lm	FF5-8404011N-WS	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-BS	
						40°	1200lm	950lm	FF5-8274011N-BS	
						3000K	24°	1300lm	1000lm	FF5-8302411N-BS
					40°	1300lm	1000lm	FF5-8304011N-BS		
					4000K	24°	1400lm	1100lm	FF5-8402411N-BS	
						40°	1400lm	1100lm	FF5-8404011N-BS	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION /FF10
Fixed LED Downlight



Project: Bvlgari Hotel, Shanghai, China

22W

CRI90
CRI80

2700K
3000K
4000K

24°
40°

OSRAM
50,000h@L80B10

UGR
< 10


IP 20

5
YEARS
GUARANTEE


CB

CE

ETL
Intertek




Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-WB
						40°	2400lm	1600lm	FF10-8274022N-WB
						24°	2600lm	1800lm	FF10-8302422N-WB
						40°	2600lm	1800lm	FF10-8304022N-WB
						24°	2800lm	2000lm	FF10-8402422N-WB
						40°	2800lm	2000lm	FF10-8404022N-WB
						24°	2400lm	1600lm	FF10-8272422N-BB
						40°	2400lm	1600lm	FF10-8274022N-BB
22 W	24 W	30 V	700 mA	80	2700K	24°	2600lm	1800lm	FF10-8302422N-BB
						40°	2600lm	1800lm	FF10-8304022N-BB
						24°	2800lm	2000lm	FF10-8402422N-BB
						40°	2800lm	2000lm	FF10-8404022N-BB
						24°	2400lm	2000lm	FF10-8272422N-WS
						40°	2400lm	2000lm	FF10-8274022N-WS
						24°	2600lm	2100lm	FF10-8302422N-WS
						40°	2600lm	2100lm	FF10-8304022N-WS
22 W	24 W	30 V	700 mA	80	2700K	24°	2800lm	2300lm	FF10-8402422N-WS
						40°	2800lm	2300lm	FF10-8404022N-WS
						24°	2400lm	2000lm	FF10-8272422N-BS
						40°	2400lm	2000lm	FF10-8274022N-BS
						24°	2600lm	2100lm	FF10-8302422N-BS
						40°	2600lm	2100lm	FF10-8304022N-BS
						24°	2800lm	2300lm	FF10-8402422N-BS
						40°	2800lm	2300lm	FF10-8404022N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION / **FFT5**
Fixed Trimless Downlight



NEKO / FUSION / **FFT10**
Fixed Trimless Downlight



11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20	5 YEARS GUARANTEE	CB	CE	ETL Intertek	
-----	----------------	-------------------------	------------	-------------------------	-------------	------	-------------------------	----	----	-----------------	--

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
11	W	13	W	15	V	700	mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-WB	
										40°	1200lm	850lm	FFT5-8274011N-WB	
										3000K	24°	1300lm	900lm	FFT5-8302411N-WB
											40°	1300lm	900lm	FFT5-8304011N-WB
										4000K	24°	1400lm	950lm	FFT5-8402411N-WB
											40°	1400lm	950lm	FFT5-8404011N-WB



Black Reflector

11	W	13	W	15	V	700	mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FFT5-8272411N-BB FFT5-8274011N-BB
									3000K	24° 40°	1300lm 1300lm	900lm 900lm	FFT5-8302411N-BB FFT5-8304011N-BB
									4000K	24° 40°	1400lm 1400lm	950lm 950lm	FFT5-8402411N-BB FFT5-8404011N-BB



Black Reflector

11	W	13	W	15	V	700	mA	80	2700K	24° 40°	1200lm 1200lm	950lm 950lm	FFT5-8272411N-WS FFT5-8274011N-WS
									3000K	24° 40°	1300lm 1300lm	1000lm 1000lm	FFT5-8302411N-WS FFT5-8304011N-WS
									4000K	24° 40°	1400lm 1400lm	1100lm 1100lm	FFT5-8402411N-WS FFT5-8404011N-WS



Specular Reflector

11	W	13	W	15	V	700	mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-BS
										40°	1200lm	950lm	FFT5-8274011N-BS
									3000K	24°	1300lm	1000lm	FFT5-8302411N-BS
										40°	1300lm	1000lm	FFT5-8304011N-BS
									4000K	24°	1400lm	1100lm	FFT5-8402411N-BS
										40°	1400lm	1100lm	FFT5-8404011N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20	5 YEARS GUARANTEE	CB	CE	ETL Intertek	
-----	----------------	-------------------------	------------	-------------------------	-------------	------	-------------------------	----	----	-----------------	--

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
22	W	24	W	30	V	700	mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-WB	
										40°	2400lm	1600lm	FFTA-8274022N-WB	
										3000K	24°	2600lm	1800lm	FFTA-8302422N-WB
											40°	2600lm	1800lm	FFTA-8304022N-WB
										4000K	24°	2800lm	2000lm	FFTA-8402422N-WB
											40°	2800lm	2000lm	FFTA-8404022N-WB



Black Reflector

22	W	24	W	30	V	700	mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FFTA-8272422N-BB FFTA-8274022N-BB
									3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FFTA-8302422N-BB FFTA-8304022N-BB
									4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FFTA-8402422N-BB FFTA-8404022N-BB



Black Reflector

22	W	24	W	30	V	700	mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FFTA-8272422N-WS FFTA-8274022N-WS
									3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FFTA-8302422N-WS FFTA-8304022N-WS
									4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FFTA-8402422N-WS FFTA-8404022N-WS



Specular Reflector


22	W	24	W	30	V	700	mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-BS
										40°	2400lm	2000lm	FFTA-8274022N-BS
									3000K	24°	2600lm	2100lm	FFTA-8302422N-BS
										40°	2600lm	2100lm	FFTA-8304022N-BS
									4000K	24°	2800lm	2300lm	FFTA-8402422N-BS
										40°	2800lm	2300lm	FFTA-8404022N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FA5
Adjustable LED Downlight

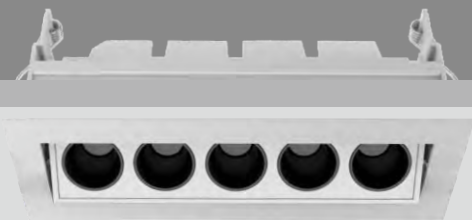

11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20	5 YEARS GUARANTEE	CB	CE	ETL Intertek	160x53	1-25mm Ceiling Thickness	60 171x70
-----	----------------	-------------------------	------------	-------------------------	-------------	-------	----------------------	----	----	-----------------	--------	-----------------------------	--------------



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-WB
						40°	1200lm	850lm	FA5-8274011N-WB
					3000K	24°	1300lm	900lm	FA5-8302411N-WB
						40°	1300lm	900lm	FA5-8304011N-WB
					4000K	24°	1400lm	950lm	FA5-8402411N-WB
						40°	1400lm	950lm	FA5-8404011N-WB



Black Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-BB
						40°	1200lm	850lm	FA5-8274011N-BB
					3000K	24°	1300lm	900lm	FA5-8302411N-BB
						40°	1300lm	900lm	FA5-8304011N-BB
					4000K	24°	1400lm	950lm	FA5-8402411N-BB
						40°	1400lm	950lm	FA5-8404011N-BB



Specular Reflector


11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-WS
						40°	1200lm	950lm	FA5-8274011N-WS
					3000K	24°	1300lm	1000lm	FA5-8302411N-WS
						40°	1300lm	1000lm	FA5-8304011N-WS
					4000K	24°	1400lm	1100lm	FA5-8402411N-WS
						40°	1400lm	1100lm	FA5-8404011N-WS



Specular Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-BS
						40°	1200lm	950lm	FA5-8274011N-BS
					3000K	24°	1300lm	1000lm	FA5-8302411N-BS
						40°	1300lm	1000lm	FA5-8304011N-BS
					4000K	24°	1400lm	1100lm	FA5-8402411N-BS
						40°	1400lm	1100lm	FA5-8404011N-BS




Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

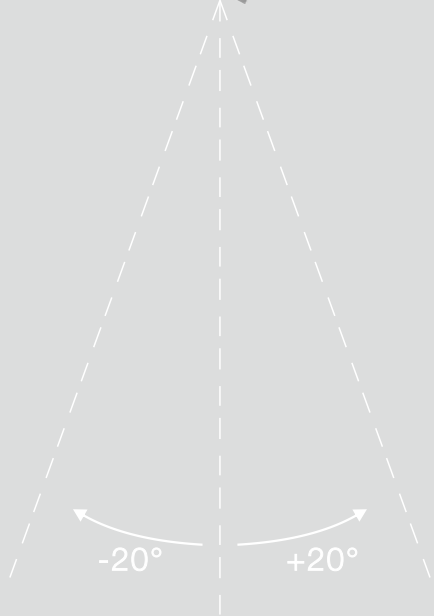

NEKO / FUSION / FA10
Adjustable LED Downlight



Project: Bvlgari Hotel, Shanghai, China


22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20		CB	CE					
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code														
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-WB				
							40°	2400lm	1600lm	FA10-8274022N-WB				
							3000K	24°	2600lm	1800lm	FA10-8302422N-WB			
								40°	2600lm	1800lm	FA10-8304022N-WB			
							4000K	24°	2800lm	2000lm	FA10-8402422N-WB			
								40°	2800lm	2000lm	FA10-8404022N-WB			
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-BB				
							40°	2400lm	1600lm	FA10-8274022N-BB				
							3000K	24°	2600lm	1800lm	FA10-8302422N-BB			
								40°	2600lm	1800lm	FA10-8304022N-BB			
							4000K	24°	2800lm	2000lm	FA10-8402422N-BB			
								40°	2800lm	2000lm	FA10-8404022N-BB			
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-WS				
							40°	2400lm	2000lm	FA10-8274022N-WS				
							3000K	24°	2600lm	2100lm	FA10-8302422N-WS			
								40°	2600lm	2100lm	FA10-8304022N-WS			
							4000K	24°	2800lm	2300lm	FA10-8402422N-WS			
								40°	2800lm	2300lm	FA10-8404022N-WS			
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-BS				
							40°	2400lm	2000lm	FA10-8274022N-BS				
							3000K	24°	2600lm	2100lm	FA10-8302422N-BS			
								40°	2600lm	2100lm	FA10-8304022N-BS			
							4000K	24°	2800lm	2300lm	FA10-8402422N-BS			
								40°	2800lm	2300lm	FA10-8404022N-BS			

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION /FW5
Wall Washer LED Downlight

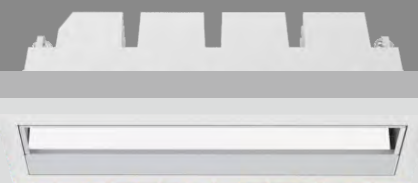

Project: Private House, China

11W

CRI90
CRI80

2700K
3000K
4000K


60,000h@L80B10

IP 20





CB

CE




144x37


1-25mm
Ceiling Thickness


60


152.5x45



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-WM	
					3000K	WW	1300lm	600lm	FW5-830WW11N-WM	
					4000K	WW	1400lm	650lm	FW5-840WW11N-WM	
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-BM	
					3000K	WW	1300lm	600lm	FW5-830WW11N-BM	
					4000K	WW	1400lm	650lm	FW5-840WW11N-BM	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FW5-830WW11N-WM
FWT5-830WW11N-WM


152x44


62.5



NEKO / FUSION / FW10
Wall Washer LED Downlight



Matt Reflector



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-WM	
					3000K	WW	2600lm	1200lm	FW10-830WW22N-WM	
					4000K	WW	2800lm	1300lm	FW10-840WW22N-WM	




22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-BM
					3000K	WW	2600lm	1200lm	FW10-830WW22N-BM
					4000K	WW	2800lm	1300lm	FW10-840WW22N-BM

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FW10-830WW22N-WM
FWTA-830WW22N-WM

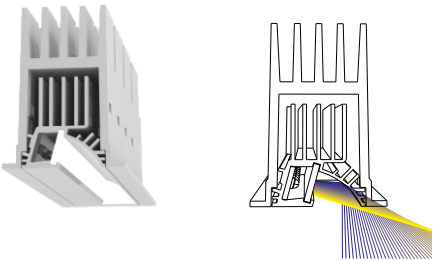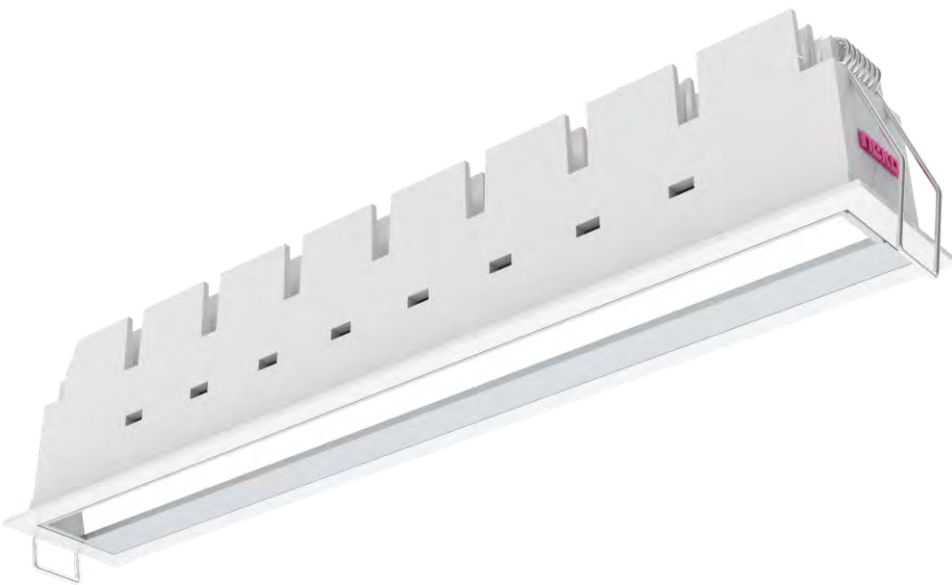


sehr gute Wall Washer Beleuchtungsqualität
High quality wall washer illumination



NEKO / FUSION / **FG5**
General LED Downlight



NEKO / FUSION / **FG10**
General LED Downlight



Black Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	380lm	FG5-8277511 N -WB
					3000K	75°	1300lm	400lm	FG5-8307511 N -WB
					4000K	75°	1400lm	450lm	FG5-8407511 N -WB


11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	350lm	FG5-8277511 N -BB
					3000K	75°	1300lm	400lm	FG5-8307511 N -BB
					4000K	75°	1400lm	450lm	FG5-8407511 N -BB

Code Remark: **N**=(NO Driver) **F**=(ON-OFF) **P**=(Phase Dim) **A**=(1-10V Dim) **D**=(DALI Dim)

Trimless available



Trimless code for FG5-8307511N-WB
FG**T**5-8307511N-WB



Black Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522 N -WB
					3000K	75°	2600lm	900lm	FG10-8307522 N -WB
					4000K	75°	2800lm	950lm	FG10-8407522 N -WB


22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522 N -BB
					3000K	75°	2600lm	900lm	FG10-8307522 N -BB
					4000K	75°	2800lm	950lm	FG10-8407522 N -BB

Code Remark: **N**=(NO Driver) **F**=(ON-OFF) **P**=(Phase Dim) **A**=(1-10V Dim) **D**=(DALI Dim)

Trimless available



Trimless code for FG10-8307522N-WB
FG**T**A-8307522N-WB




Project: Medical Office Celle Germany, Germany




Diversity Design with Adjustable Spot Light



NEKO / FUSION / **FS1**
Adjustable Spotlight



NEKO / FUSION / **FS2**
Adjustable Spotlight



2W	CRI80 CRI90	2700K 3000K 4000K		OSRAM	UGR < 19	IP 20		CB	CE		
----	----------------	-------------------------	--	-------	-------------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-WN	
						30°	220lm	160lm	FS1-8273002N-WN	
						3000K	15°	250lm	170lm	FS1-8301502N-WN
							30°	250lm	170lm	FS1-8303002N-WN
					4000K	15°	280lm	180lm	FS1-8401502N-WN	
						30°	280lm	180lm	FS1-8403002N-WN	
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-BN	
						30°	220lm	160lm	FS1-8273002N-BN	
						3000K	15°	250lm	170lm	FS1-8301502N-BN
							30°	250lm	170lm	FS1-8303002N-BN
					4000K	15°	280lm	180lm	FS1-8401502N-BN	
						30°	280lm	180lm	FS1-8403002N-BN	

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)


4W	CRI80 CRI90	2700K 3000K 4000K		OSRAM	UGR < 19	IP 20		CB	CE		
----	----------------	-------------------------	--	-------	-------------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-WN	
						30°	450lm	330lm	FS2-8273004N-WN	
						3000K	15°	500lm	350lm	FS2-8301504N-WN
							30°	500lm	350lm	FS2-8303004N-WN
					4000K	15°	550lm	400lm	FS2-8401504N-WN	
						30°	550lm	400lm	FS2-8403004N-WN	
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-BN	
						30°	450lm	330lm	FS2-8273004N-BN	
						3000K	15°	500lm	350lm	FS2-8301504N-BN
							30°	500lm	350lm	FS2-8303004N-BN
					4000K	15°	550lm	400lm	FS2-8401504N-BN	
						30°	550lm	400lm	FS2-8403004N-BN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / **FS3**
Adjustable Spotlight

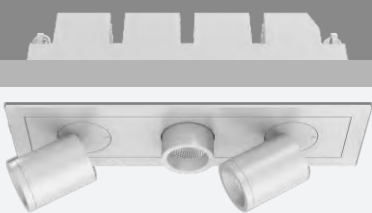

7W	CRI80 CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP 20		CB	CE			1-25mm Ceiling Thickness	
----	----------------	-------------------------	--	--------------------------------	-------------	-------	--	----	----	--	--	-----------------------------	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	500lm	FS3-8271507N-WN
						30°	700lm	500lm	500lm	FS3-8273007N-WN
						3000K	15°	750lm	550lm	FS3-8301507N-WN
							30°	750lm	550lm	FS3-8303007N-WN
						4000K	15°	800lm	600lm	FS3-8401507N-WN
							30°	800lm	600lm	FS3-8403007N-WN


7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	500lm	FS3-8271507N-BN
						30°	700lm	500lm	500lm	FS3-8273007N-BN
						3000K	15°	750lm	550lm	FS3-8301507N-BN
							30°	750lm	550lm	FS3-8303007N-BN
						4000K	15°	800lm	600lm	FS3-8401507N-BN
							30°	800lm	600lm	FS3-8402507N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Trimless available



Trimless code for FS3-8301507N-WN
FS**T**3-8301507N-WN



NEKO / FUSION / **FS6**
Adjustable Spotlight

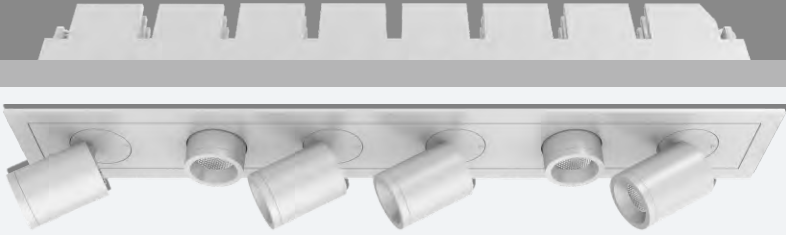

13W	CRI80 CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP 20		CB	CE			1-25mm Ceiling Thickness	
-----	----------------	-------------------------	--	--------------------------------	-------------	-------	--	----	----	--	--	-----------------------------	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	1000lm	FS6-8271513N-WN
						30°	1400lm	1000lm	1000lm	FS6-8273013N-WN
						3000K	15°	1500lm	1050lm	FS6-8301513N-WN
							30°	1500lm	1050lm	FS6-8303013N-WN
						4000K	15°	1600lm	1100lm	FS6-8401513N-WN
							30°	1600lm	1100lm	FS6-8403013N-WN

13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	1000lm	FS6-8271513N-BN
						30°	1400lm	1000lm	1000lm	FS6-8273013N-BN
						3000K	15°	1500lm	1050lm	FS6-8301513N-BN
							30°	1500lm	1050lm	FS6-8303013N-BN
						4000K	15°	1600lm	1100lm	FS6-8401513N-BN
							30°	1600lm	1100lm	FS6-8403013N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FS6-8301513N-WN
FS**T**6-8301513N-WN



NEKO / FUSION / FF3-FS1
Adjustable Spotlight



9W	CRI80 CRI90	2700K 3000K 4000K		OSRAM	UGR < 19	IP 20		CB	CE		
----	----------------	-------------------------	--	-------	----------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-WB	
					3000K	40°	900lm	650lm	FFS1-8274009N-WB	
						24°	1000lm	700lm	FFS1-8302409N-WB	
					40°	1000lm	700lm	FFS1-8304009N-WB		
					4000K	24°	1100lm	800lm	FFS1-8402409N-WB	
						40°	1100lm	800lm	FFS1-8404009N-WB	



9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-BB
						40°	900lm	650lm	FFS1-8274009N-BB
					3000K	24°	1000lm	700lm	FFS1-8302409N-BB
						40°	1000lm	700lm	FFS1-8304009N-BB
					4000K	24°	1100lm	800lm	FFS1-8402409N-BB
						40°	1100lm	800lm	FFS1-8404009N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FFS1-8304009N-WN
FFS3-8304009N-WN



NEKO / FUSION / FF6-FS2
Adjustable Spotlight



17W	CRI80 CRI90	2700K 3000K 4000K		OSRAM	UGR < 19	IP 20		CB	CE		
-----	----------------	-------------------------	--	-------	----------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-WB	
						40°	1900lm	1300lm	FFS2-8274017N-WB	
					3000K	24°	2000lm	1400lm	FFS2-8302417N-WB	
						40°	2000lm	1400lm	FFS2-8304017N-WB	
					4000K	24°	2200lm	1500lm	FFS2-8402417N-WB	
						40°	2200lm	1500lm	FFS2-8404017N-WB	



17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-BB
						40°	1900lm	1300lm	FFS2-8274017N-BB
					3000K	24°	2000lm	1400lm	FFS2-8302417N-BB
						40°	2000lm	1400lm	FFS2-8304017N-BB
					4000K	24°	2200lm	1500lm	FFS2-8402417N-BB
						40°	2200lm	1500lm	FFS2-8404017N-BB


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FFS2-8304017N-WN
FFS4-8304017N-WN



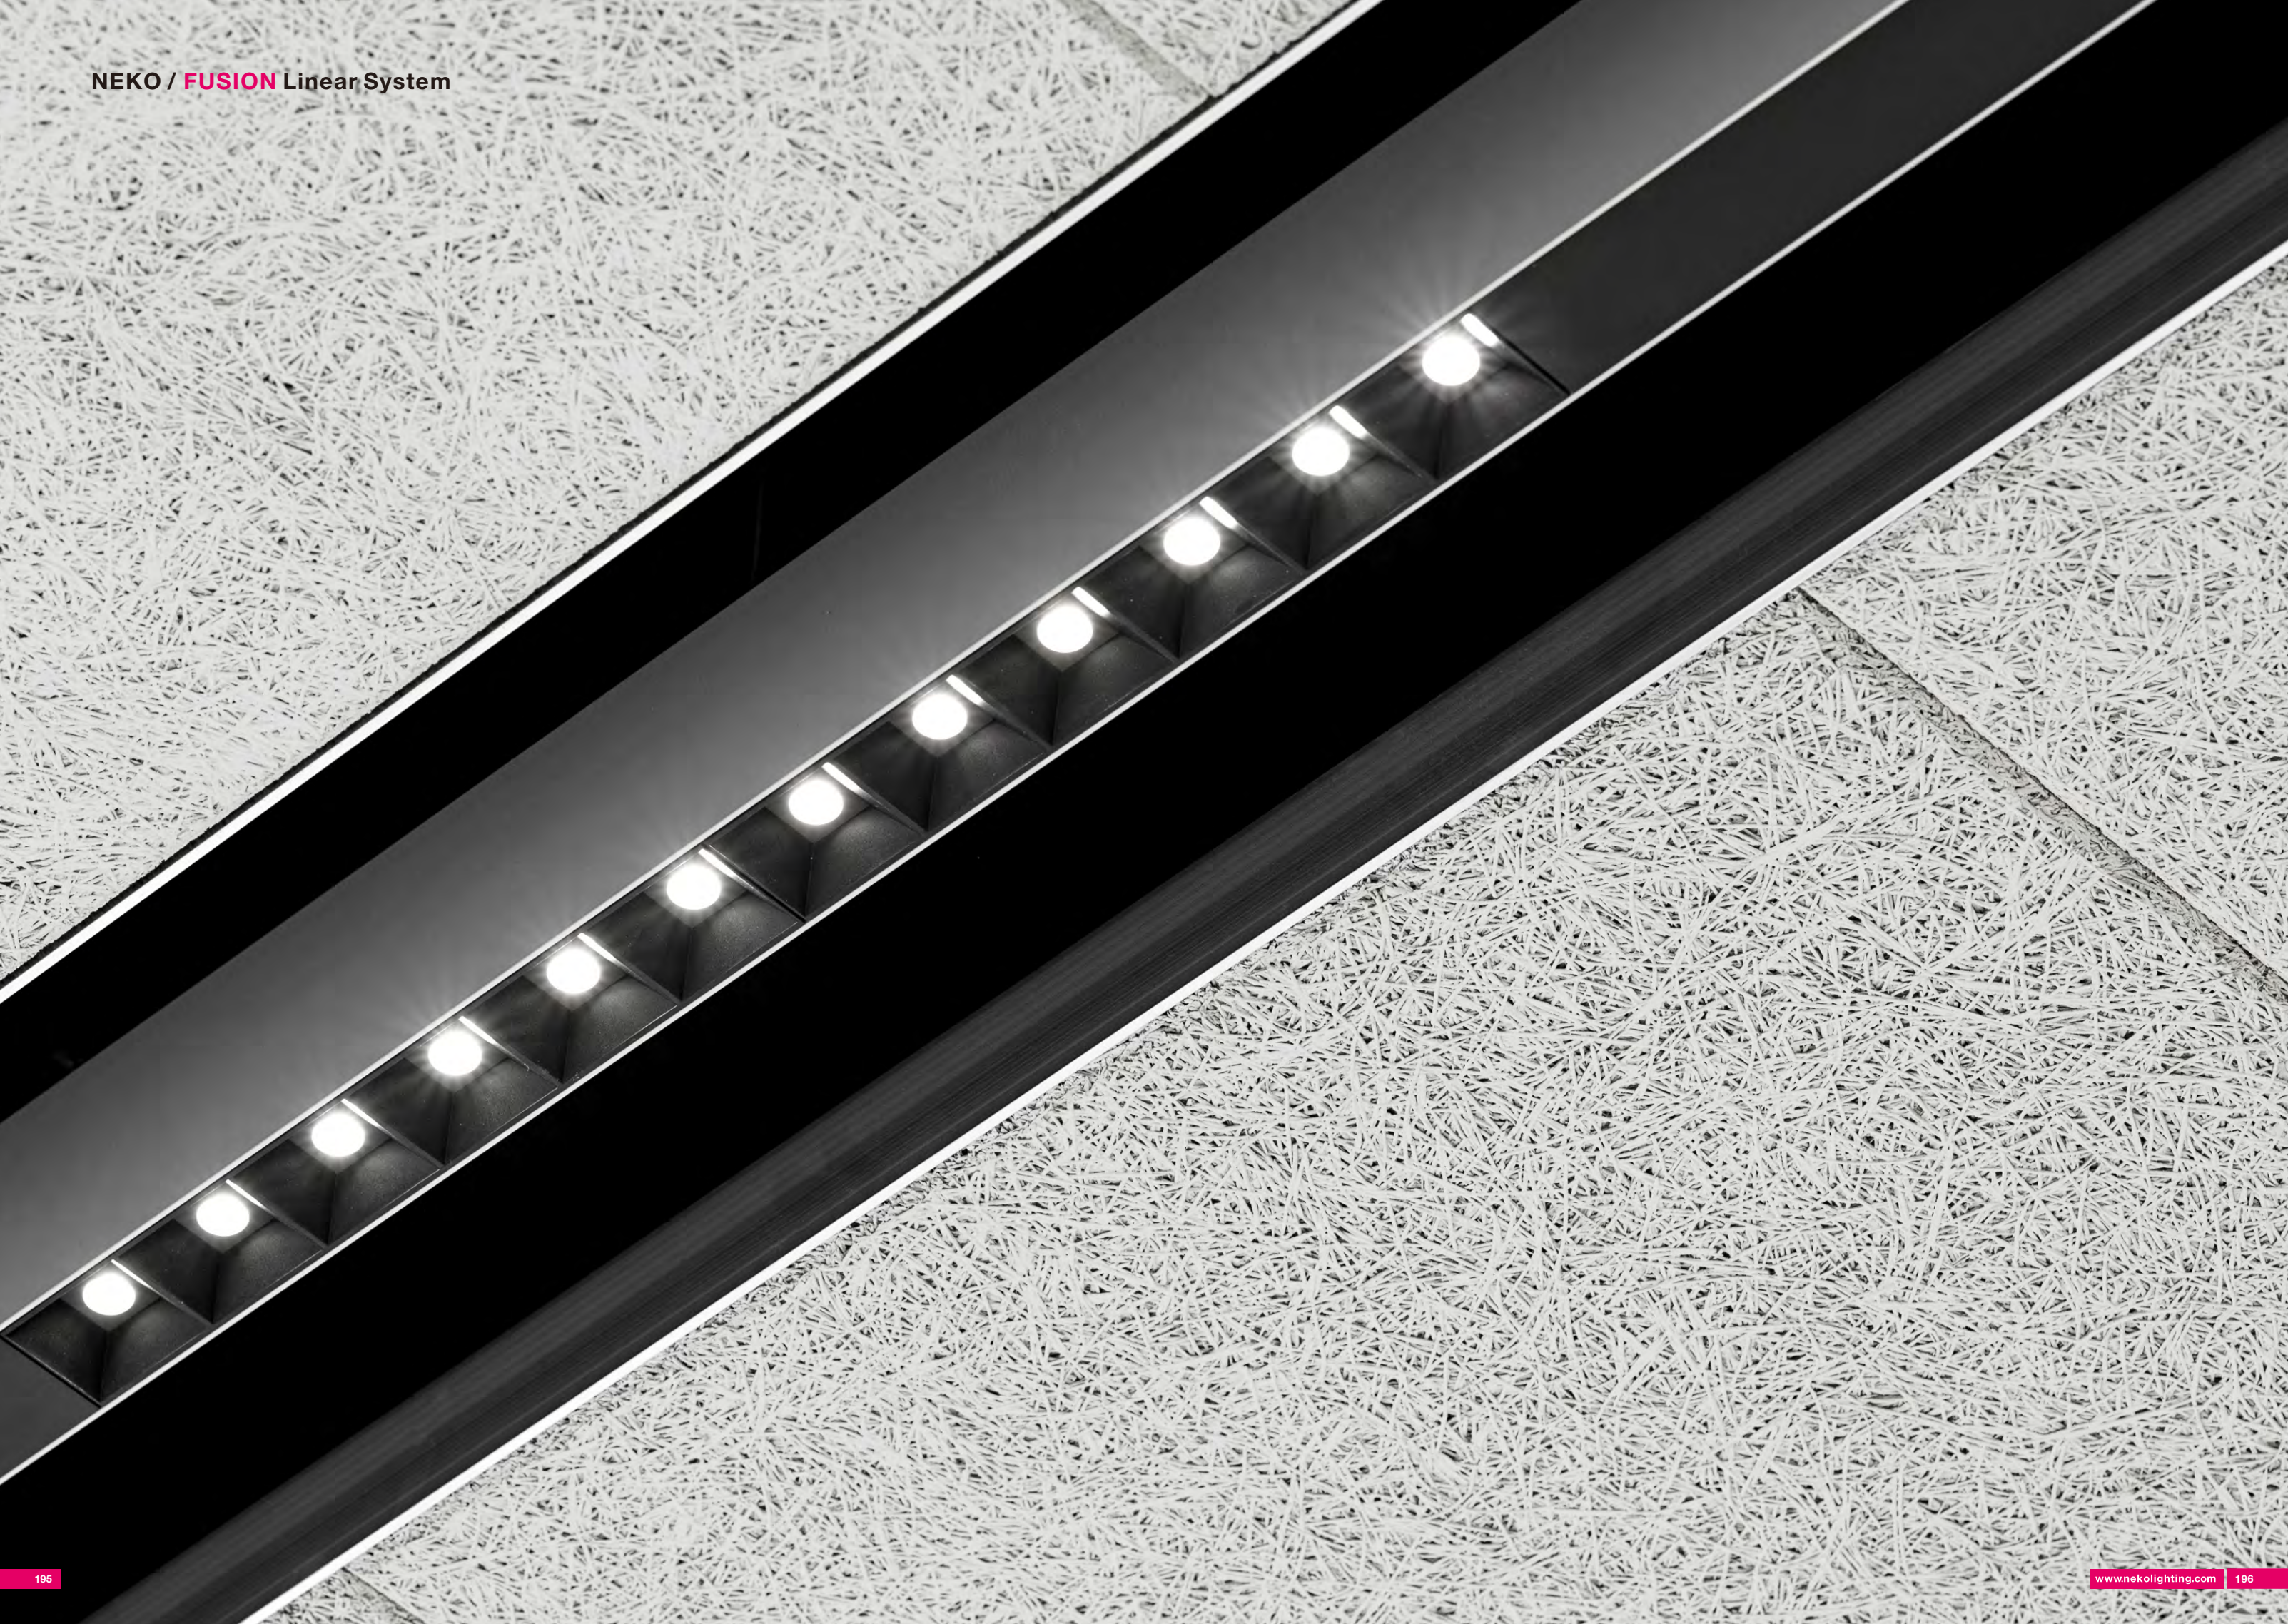









NEKO / **FUSION** Linear System
With FUSION Downlight Module

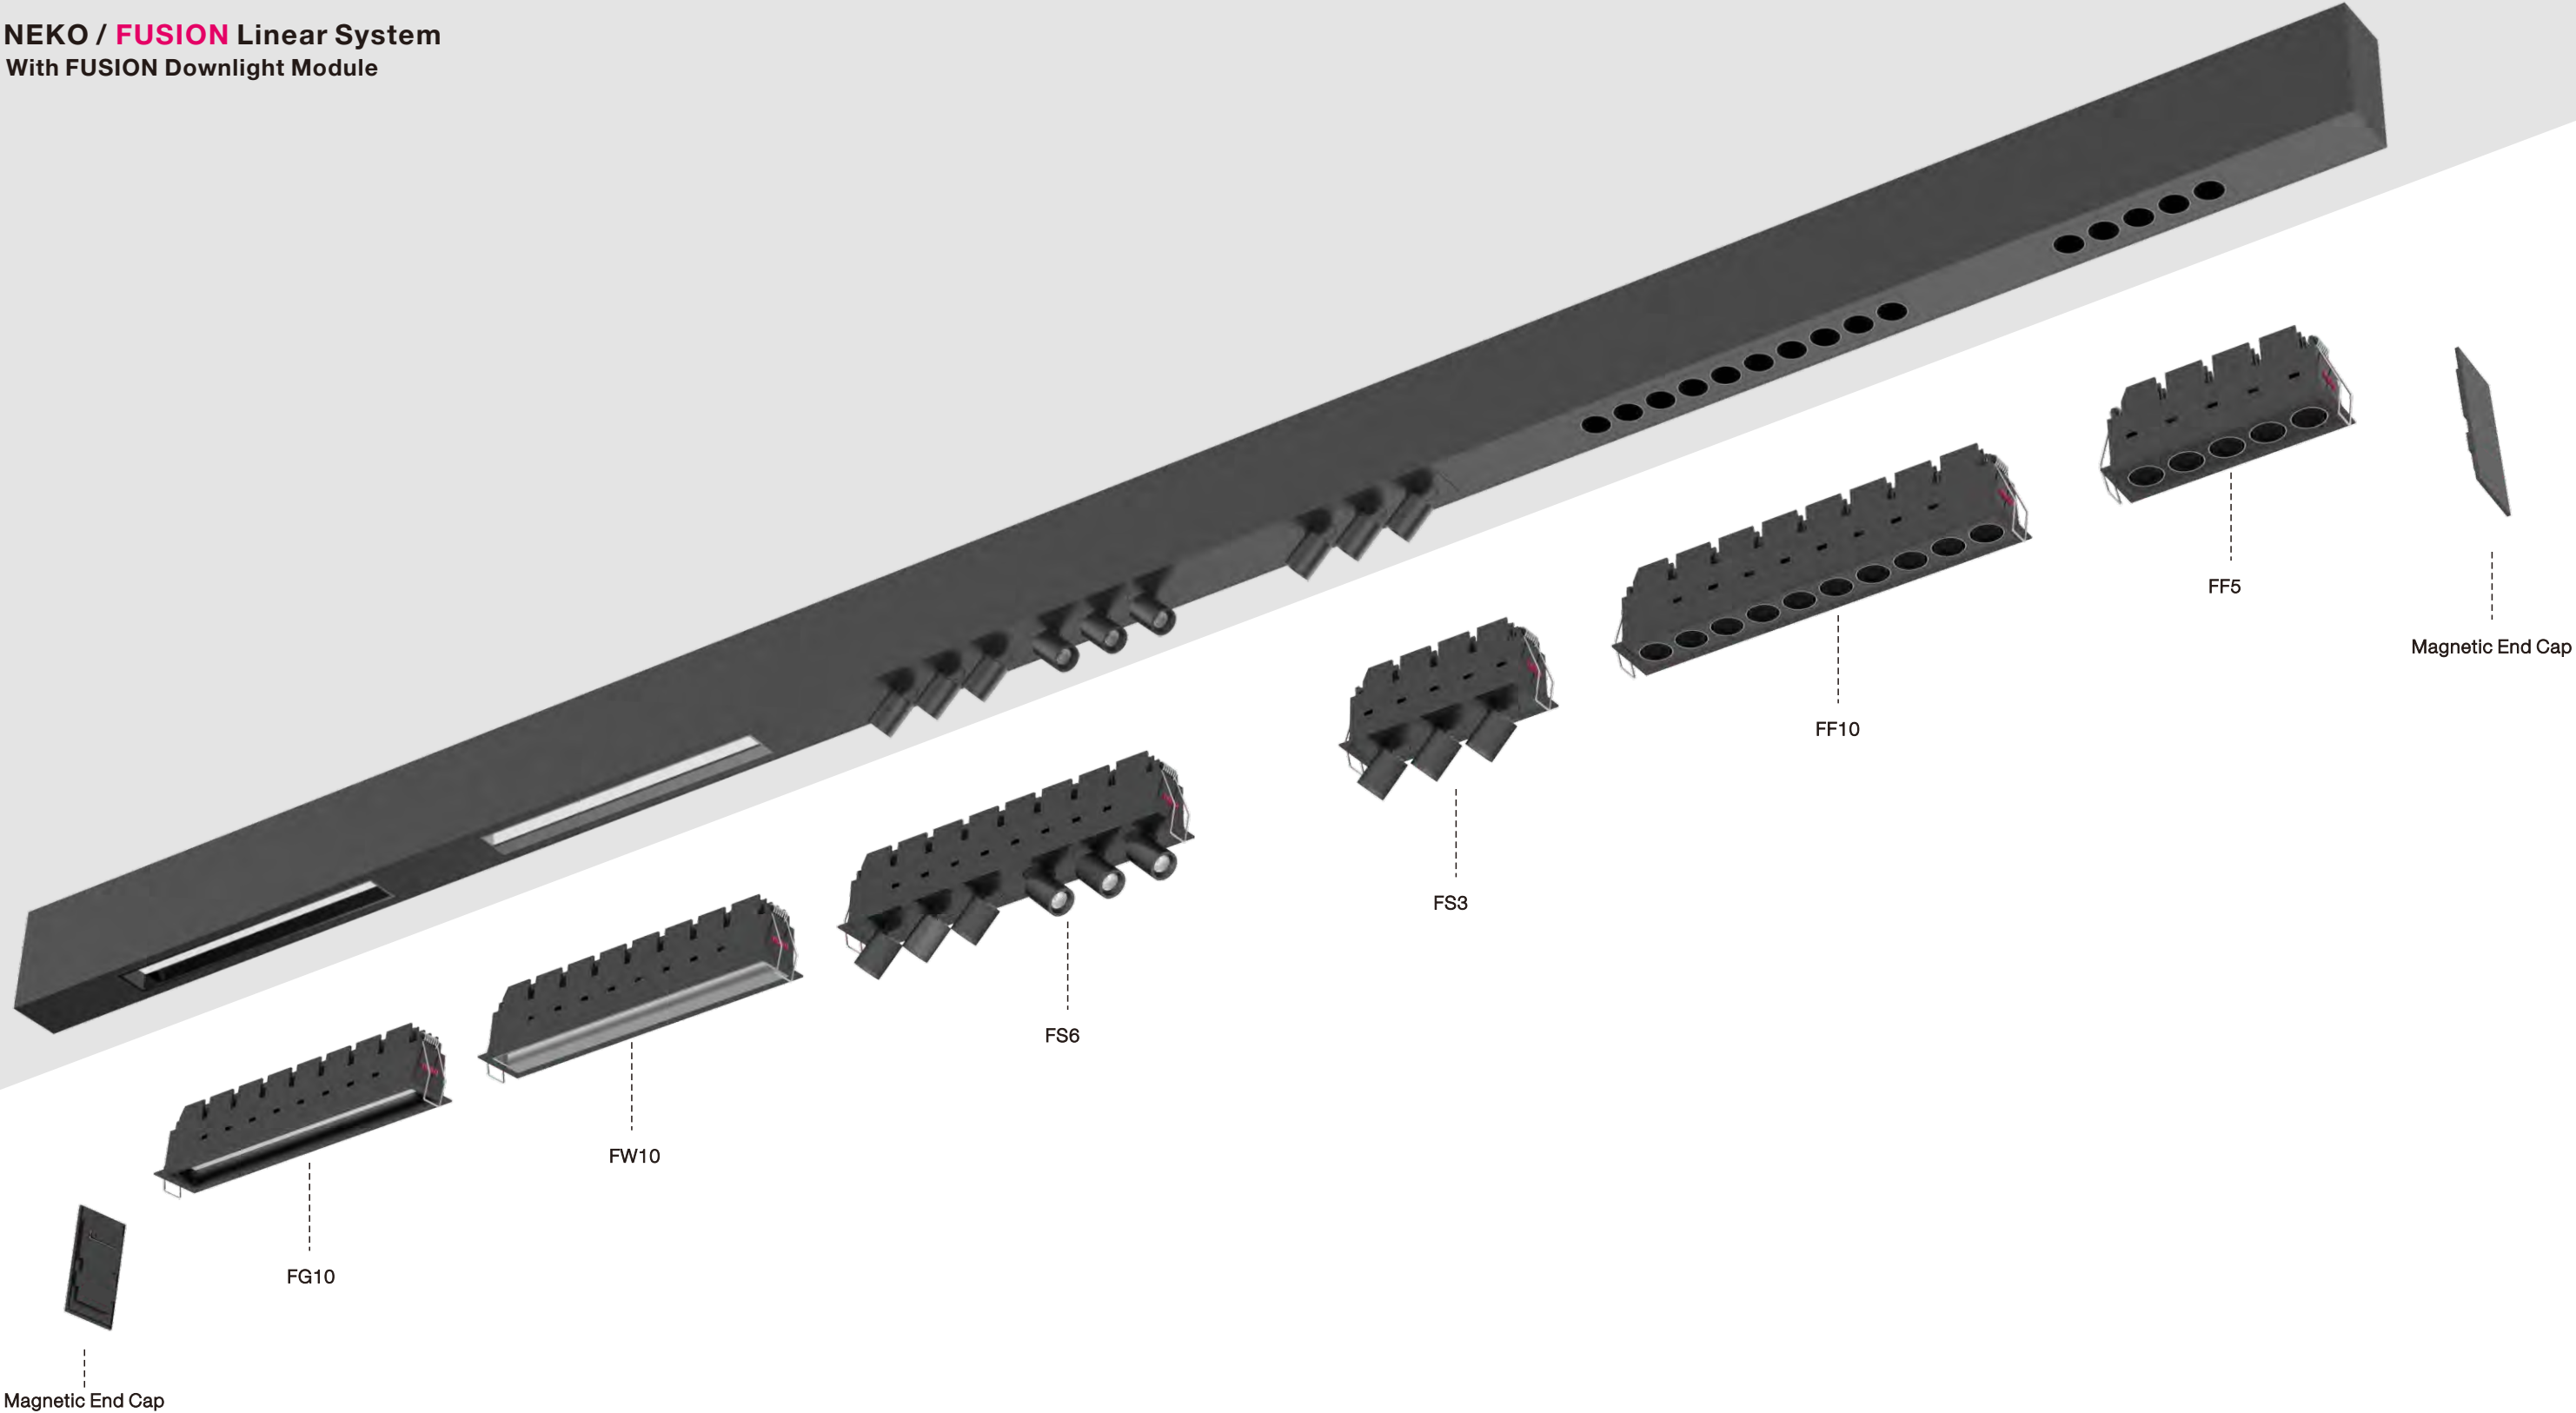

- Aufbau-, Einbau- und Pendelleuchte.
- Einfache und unbegrenzte Längenbestimmung, nahtlose Verbindung.
- Das Profil kann als einzelne, allgemeine, wall washer oder mit verschiedenen und unterschiedlichen Modulen bestückt werden.
- Modulares Profildesign ohne sichtbare Schrauben, Standardlänge 1,2 m & 1,5 m.
- Aluminiumprofil, Farbwahl weiß / schwarz .
- Pendelleuchte mit 2000mm Seilabhängung, werkzeuglose Höhenverstellung.
- Hoher Sehkomfort, UGR <19.
- LED 3000K / 4000K, Binning <3 step MacAdam, CRI 80/90.



- Suspended, surface mounted and recessed mounted luminaires.
- Easy and unlimited length adjustment, seamless connection.
- Can be used as single fixed / general light / spotlight / wall washer / MIXED.
- Modular profile design with no visible screws, standard length 1.2m & 1.5m.
- Aluminum profile, color choices white / black .
- Suspended luminaire with 2000mm cable suspension, tool free height adjustment.
- High visual comfort, UGR<19.
- LED 3000K/ 4000K, binning≤ 3 step MacAdam, CRI 80/ 90.

NEKO / FUSION Linear System
With Linear Light Module

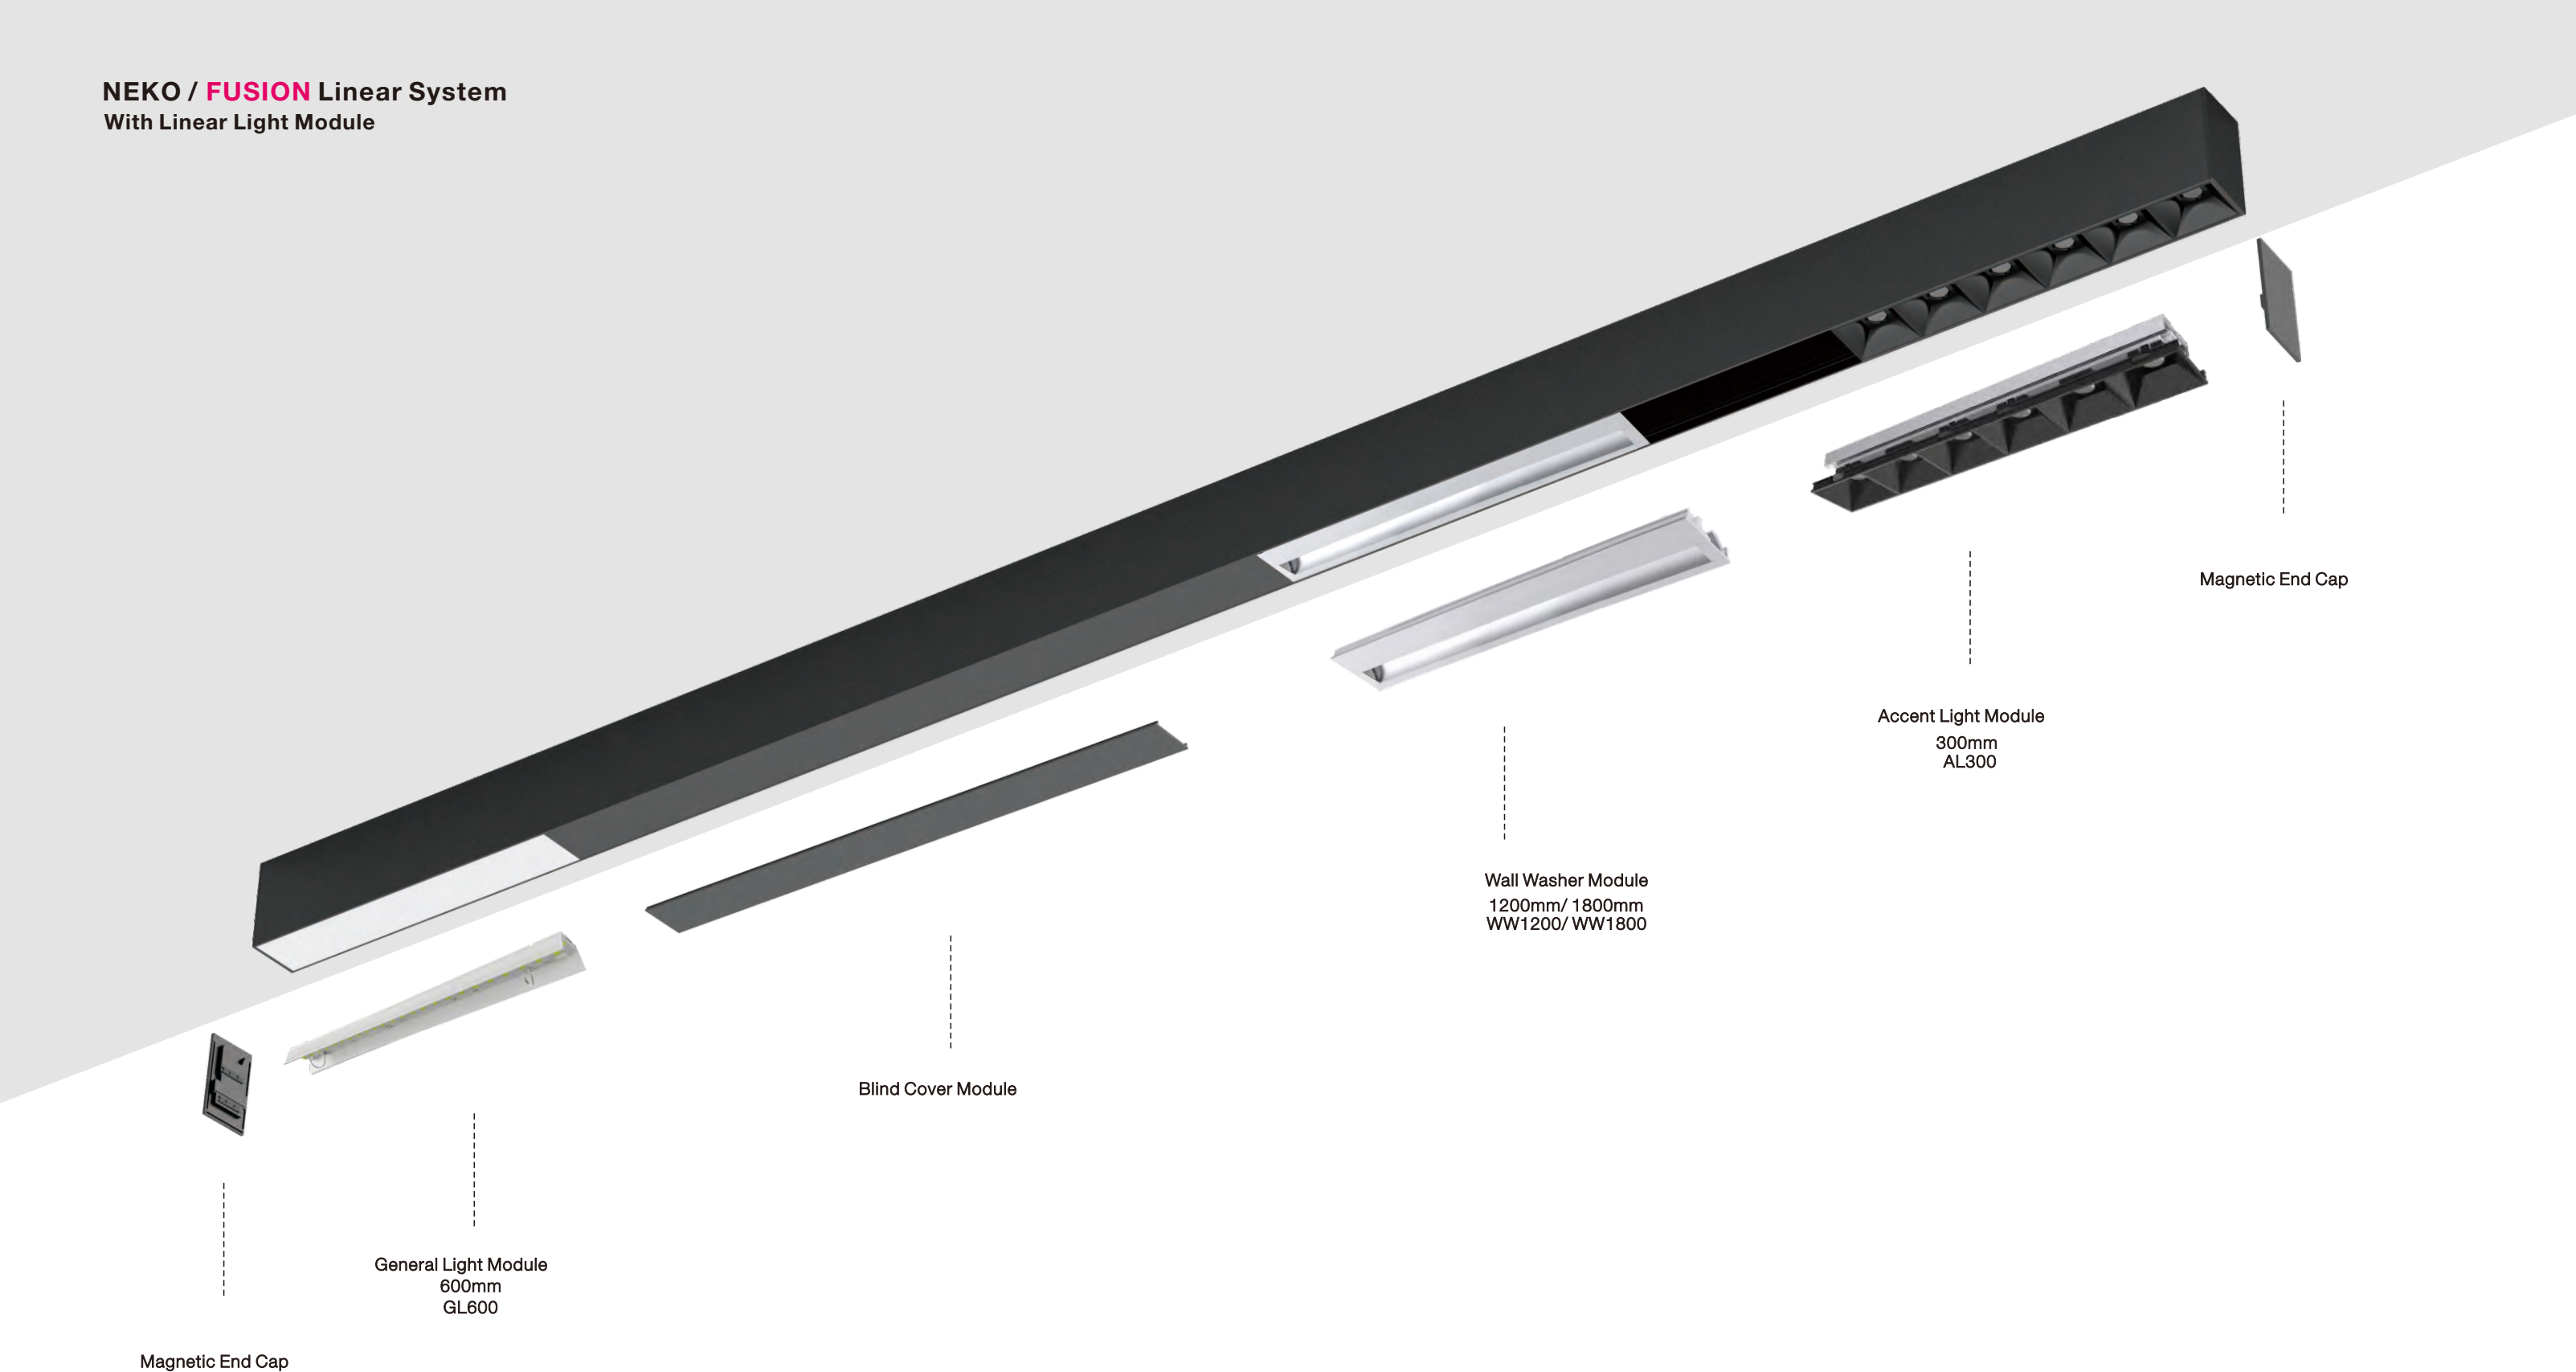


- Schönes Profilsystem aus Aluminiumdruckguss und mit 50 mm Breite
- Verschiedenste Lichtmodule für beste und individuelle Lichtlösungen
- Akzent-, Allgemein- und Spotbeleuchtung – auch Wall washer Modul vorhanden
- Komplette werkzeuglose Montage
- Standard und kundenspezifische Längen
- Magnetische Endkappen – keine Schrauben sichtbar

- Profile system made of extruded aluminium with 50mm width.
- Various lighting modules with multiple lighting applications.
- General light, accent light, wall washer and spotlight module for choice.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover for high precise system.
- Magnetic end cap without fixing screws.

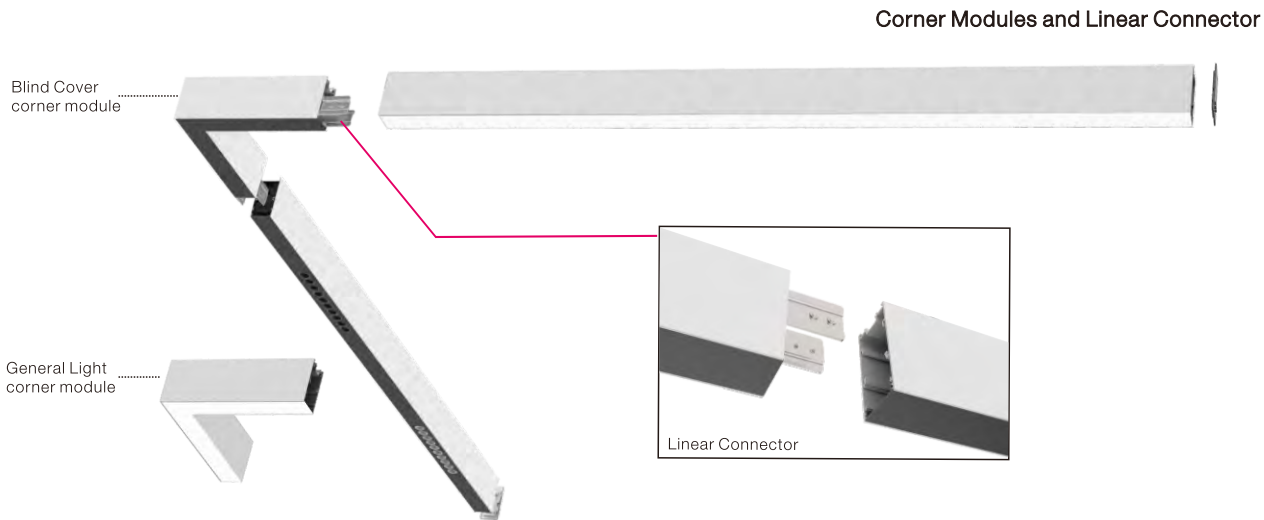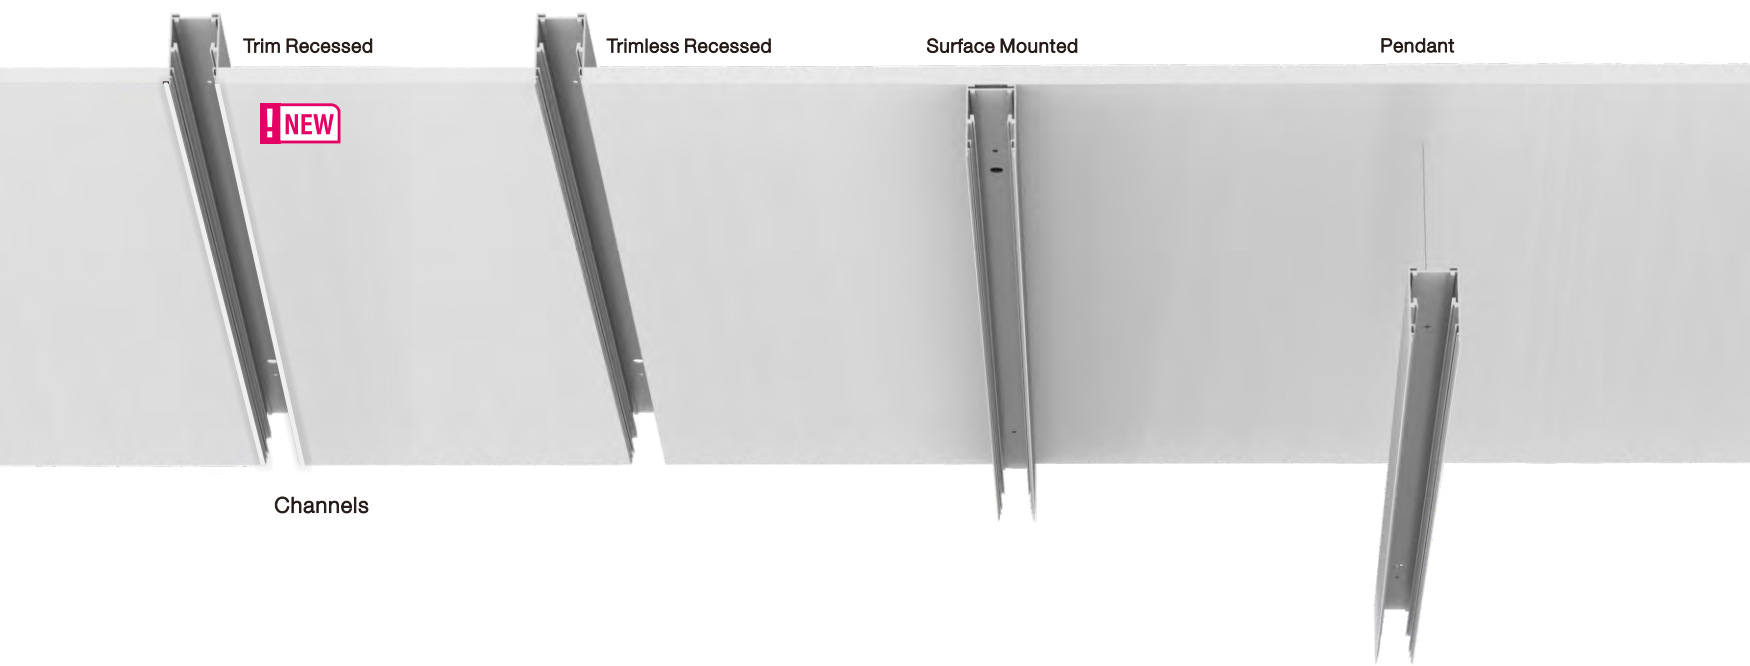

Inserts

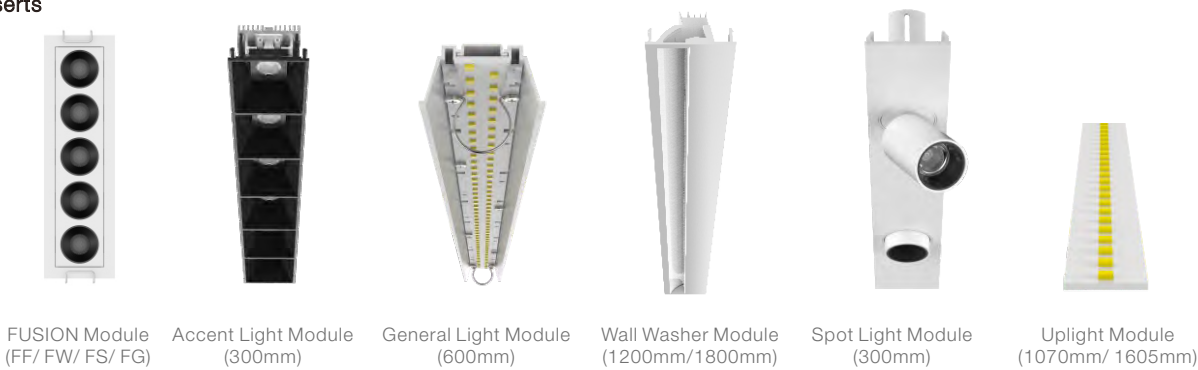


Covers



Mounting Kits




System details

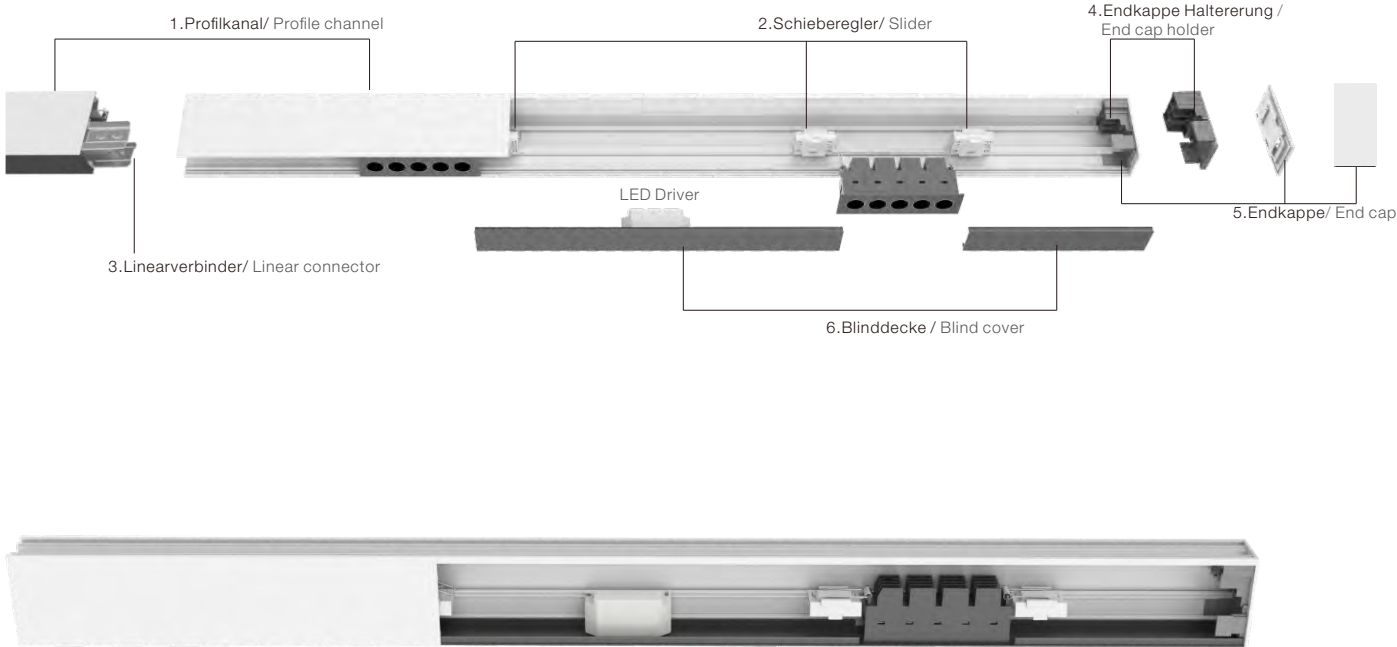

Intelligentes Linear-Profil-Design
Einfachste Installation der Fusion-Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install fusion downlight into profile channel

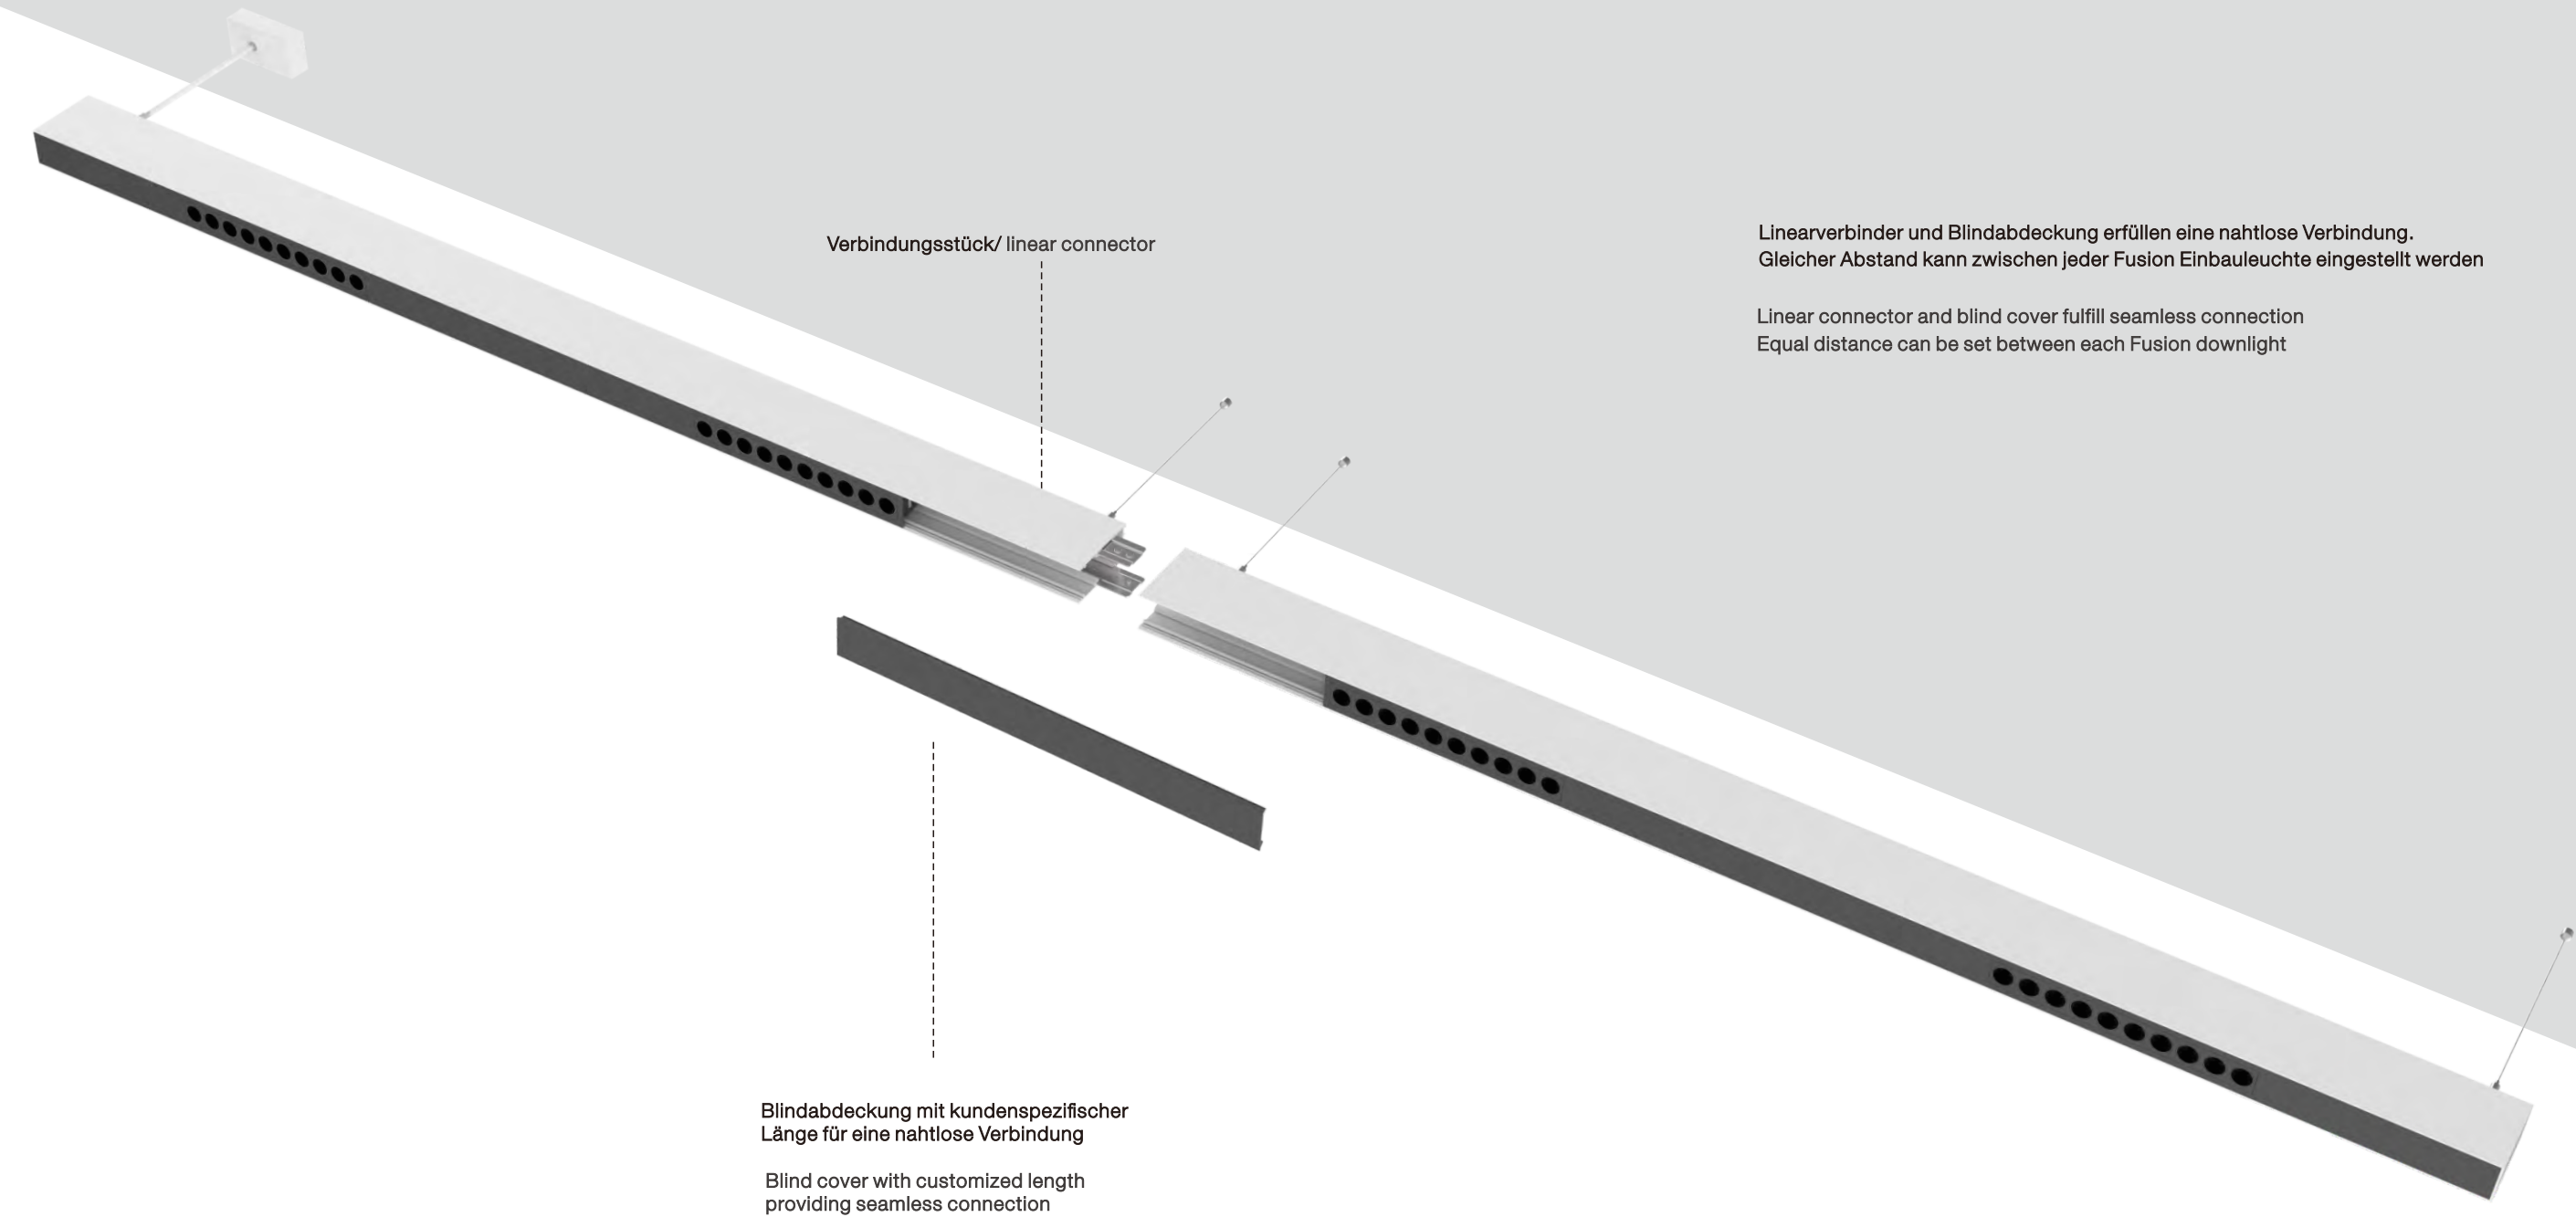

NEKO / FUSION Linear System

Linear Light module

General Light Module



GL600


Linkable extruded aluminium
for continuous linear light
594mm for different system
Opal cover can be customized length

11W	CRI80 CRI90	2700K 3000K 4000K	105°	50,000h@L80B10	5 YEARS GUARANTEE	CB	CE		594
-----	----------------	-------------------------	------	----------------	----------------------	----	----	--	-----

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46V	250 mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105° N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105° N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105° N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105° N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105° N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105° N
				80	2700K	105°	2100lm	1700lm	GL600-16W-827-105° N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105° N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105° N
16 W	18 W	46V	350 mA	90	2700K	105°	1900lm	1600lm	GL600-16W-927-105° N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105° N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105° N

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

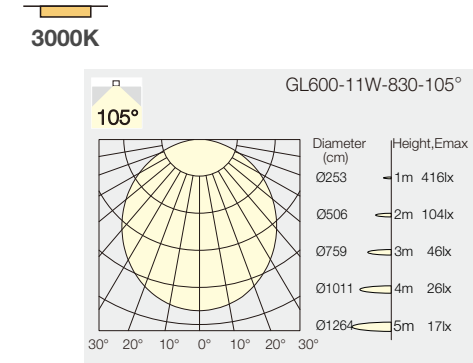

NEKO / FUSION Linear System

Linear Light module

Wallwasher Module



WW1200/ WW1800


Uniform wall washer effect

22W 32W 48W	CRI80 CRI90	2700K 3000K 4000K	105°	50,000h@L80B10	5 YEARS GUARANTEE	CB	CE		1200/ 1800
-------------------	----------------	-------------------------	------	----------------	----------------------	----	----	--	------------

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827 N
					3000K	WW	3400lm	1800lm	WW1200-22W-830 N
					4000K	WW	3600lm	1900lm	WW1200-22W-840 N
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927 N
					3000K	WW	3200lm	1600lm	WW1200-22W-930 N
					4000K	WW	3400lm	1700lm	WW1200-22W-940 N
				80	2700K	WW	4600lm	2300lm	WW1200-32W-827 N
					3000K	WW	4800lm	2500lm	WW1200-32W-830 N
					4000K	WW	5000lm	2700lm	WW1200-32W-840 N
32 W	36 W	46V	700 mA	90	2700K	WW	4000lm	2000lm	WW1200-32W-927 N
					3000K	WW	4200lm	2200lm	WW1200-32W-930 N
					4000K	WW	4400lm	2400lm	WW1200-32W-940 N
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827 N
					3000K	WW	4800lm	2700lm	WW1800-32W-830 N
					4000K	WW	5000lm	2900lm	WW1800-32W-840 N
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927 N
					3000K	WW	4200lm	2300lm	WW1800-32W-930 N
					4000K	WW	4400lm	2500lm	WW1800-32W-940 N
				80	2700K	WW	6200lm	3300lm	WW1800-48W-827 N
					3000K	WW	6400lm	3500lm	WW1800-48W-830 N
					4000K	WW	6600lm	3700lm	WW1800-48W-840 N
48 W	52 W	46V	700+350 mA	90	2700K	WW	5500lm	2900lm	WW1800-48W-927 N
					3000K	WW	5700lm	3100lm	WW1800-48W-930 N
					4000K	WW	5900lm	3300lm	WW1800-48W-940 N

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

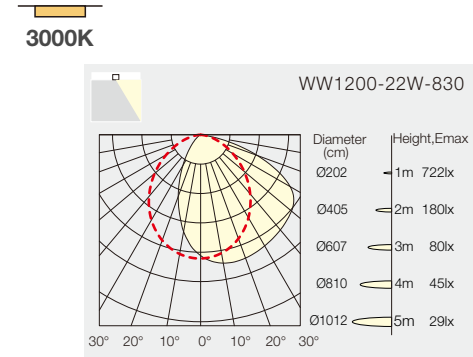


NEKO / **FUSION** Linear System

Linear Light module

Spot Light Module


SL300-1S-4W

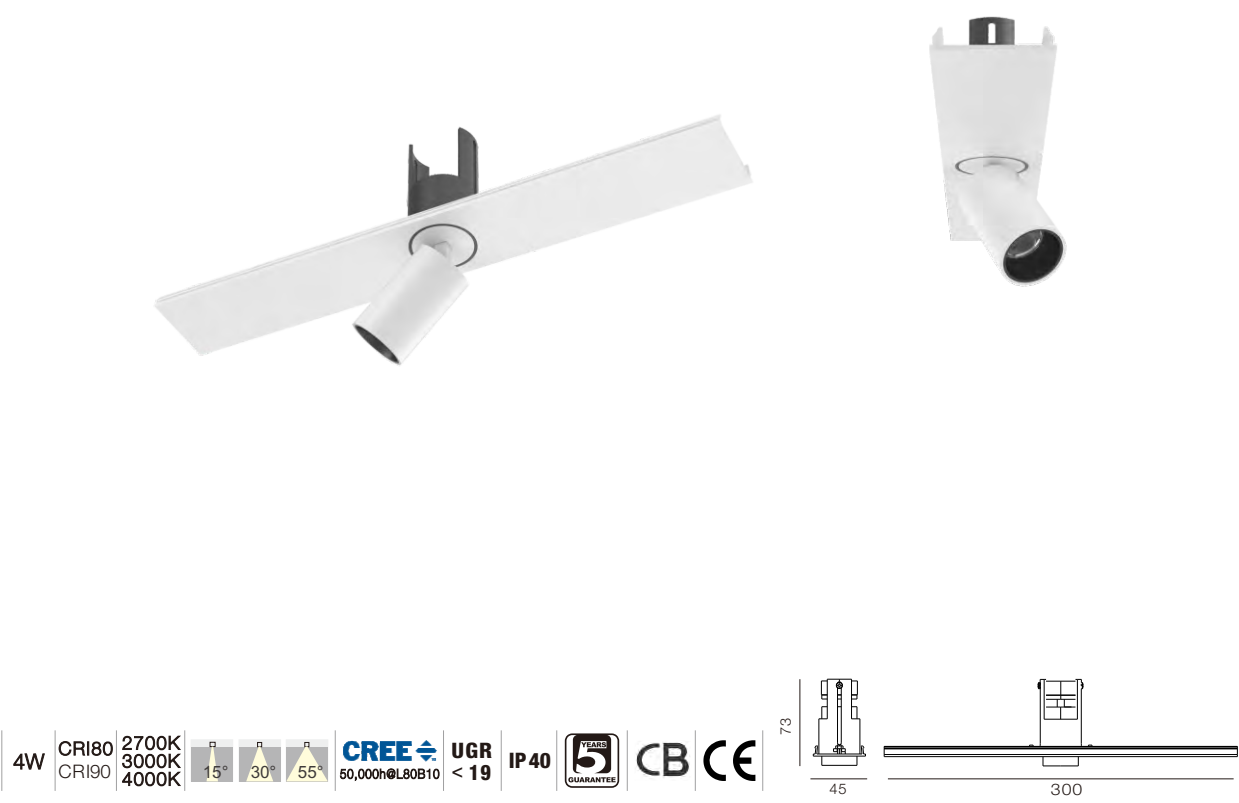

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
4 W	6 W	12V	350 mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15° N
						30°	470lm	350lm	SL300-1S-4W-827-30° N
						55°	470lm	350lm	SL300-1S-4W-827-55° N
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15° N
						30°	500lm	380lm	SL300-1S-4W-830-30° N
						55°	500lm	380lm	SL300-1S-4W-830-55° N
				4000K	15°	550lm	420lm	SL300-1S-4W-840-15° N	
					30°	550lm	420lm	SL300-1S-4W-840-30° N	
					55°	550lm	420lm	SL300-1S-4W-840-55° N	

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

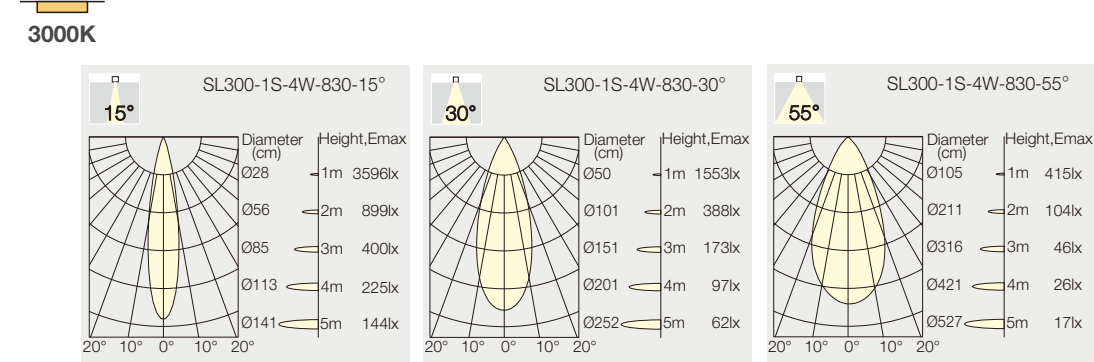

NEKO / **FUSION** Linear System

Linear Light module

Spot Light Module


SL300-2S-8W



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model			
8 W	10 W	24V	350 mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15° N			
						30°	850lm	650lm	SL300-2S-8W-827-30° N			
						55°	850lm	650lm	SL300-2S-8W-827-55° N			
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15° N			
						30°	900lm	700lm	SL300-2S-8W-830-30° N			
						55°	900lm	700lm	SL300-2S-8W-830-55° N			
				4000K	15°	950lm	750lm	SL300-2S-8W-840-15° N				
					30°	950lm	750lm	SL300-2S-8W-840-30° N				
					55°	950lm	750lm	SL300-2S-8W-840-55° N				

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

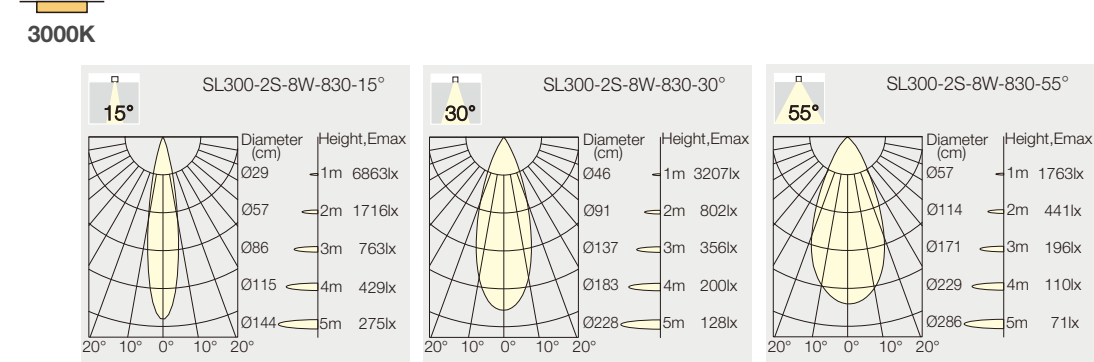

NEKO / **FUSION** Linear System

Linear Light module

Spot Light Module


SL450-3S-13W



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
13 W	15 W	36V	350 mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

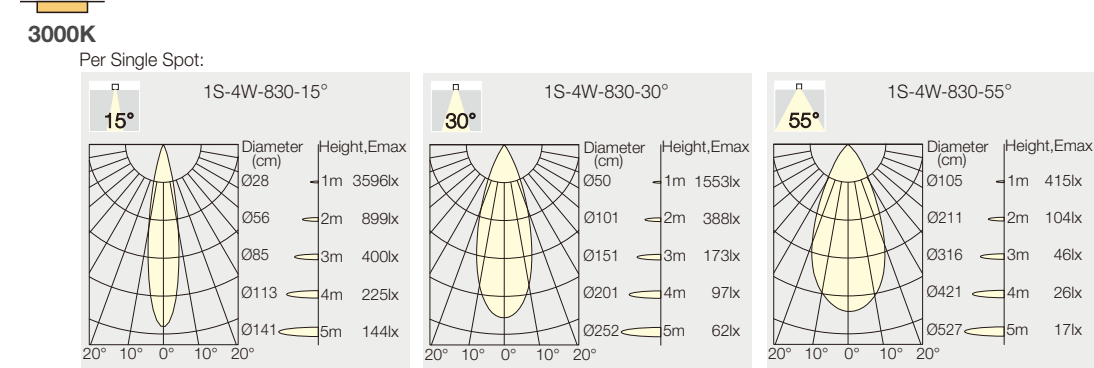

NEKO / **FUSION** Linear System

Linear Light module

Accent Light Module


AL300-13W



AL300

Different lens for beam control


Low glare contributed by black baffle




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
13 W	15 W	18 V	700 mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

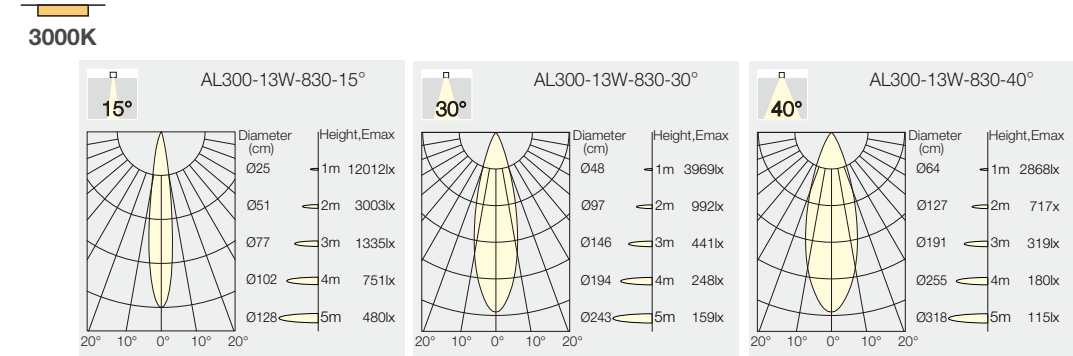

NEKO / FUSION Linear System
Linear Light module
Up Light Module
UL1200-11W/ UL1800-16W

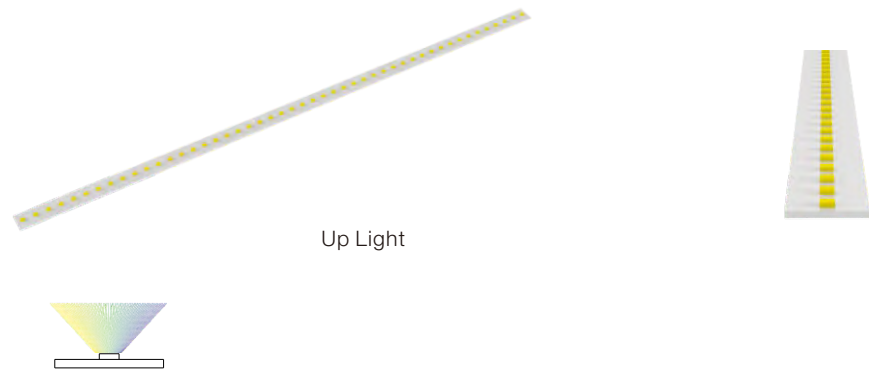


11W	CRI80	2700K						15.5	1070/ 1605
16W	CRI90	3000K 4000K	50,000h	50000h	50000h				

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46 V	250 mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°N
						3000K	1800lm	1600lm	UL1200-11W-830-110°N
						4000K	1900lm	1700lm	UL1200-11W-840-110°N
16 W	18 W	46 V	350 mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°N
						3000K	2500lm	2200lm	UL1800-16W-830-110°N
						4000K	2700lm	2400lm	UL1800-16W-840-110°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Light Distribution

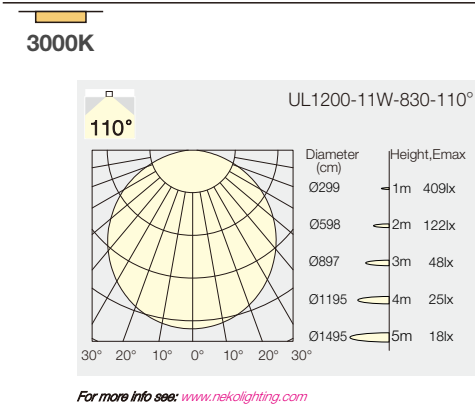

Installation Type: Pendant with Uplight



NEKO/ **FUSION** Linear System
FL1500-2*FF10/ FL1200-2*FF5

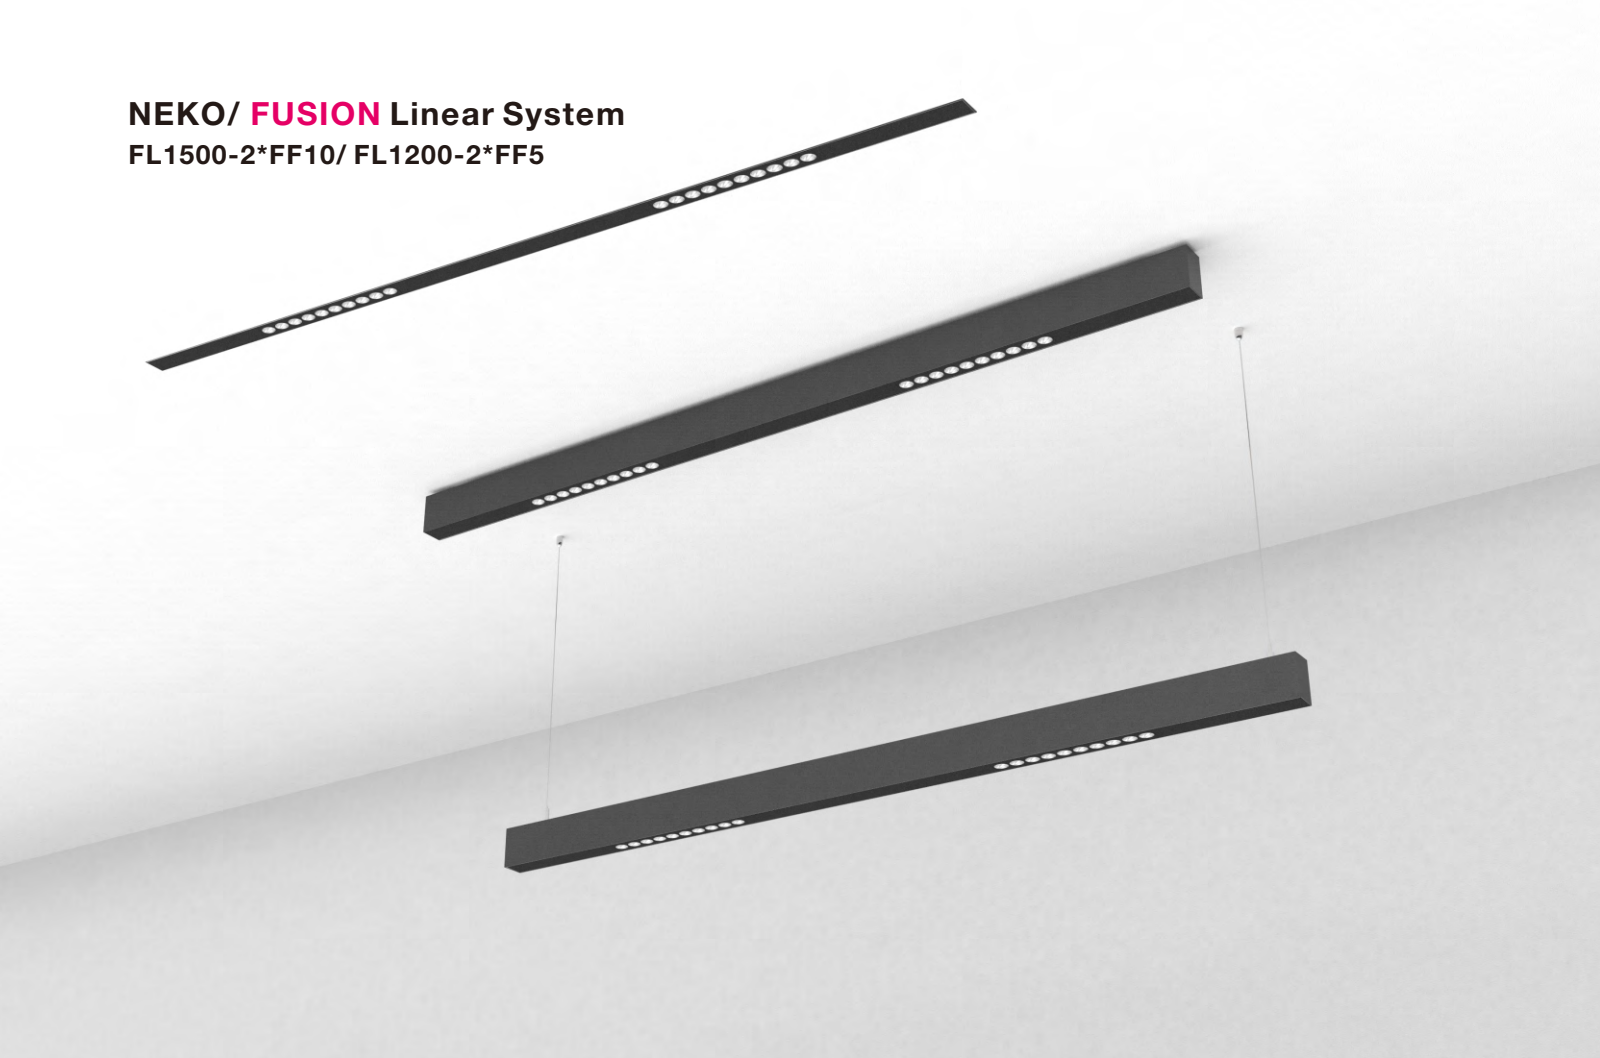


Project: Office Shire House, U.K.




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
44 W	48 W	31+31V	700 mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-24°F
						40°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-40°F
						3000K 24°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-24°F
						40°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-40°F
						4000K 24°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-24°F
						40°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-40°F
22 W	26 W	16+16V	700 mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-24°F
						40°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-40°F
						3000K 24°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-24°F
						40°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-40°F
						4000K 24°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-24°F
						40°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-40°F


Remark: (Y)= P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

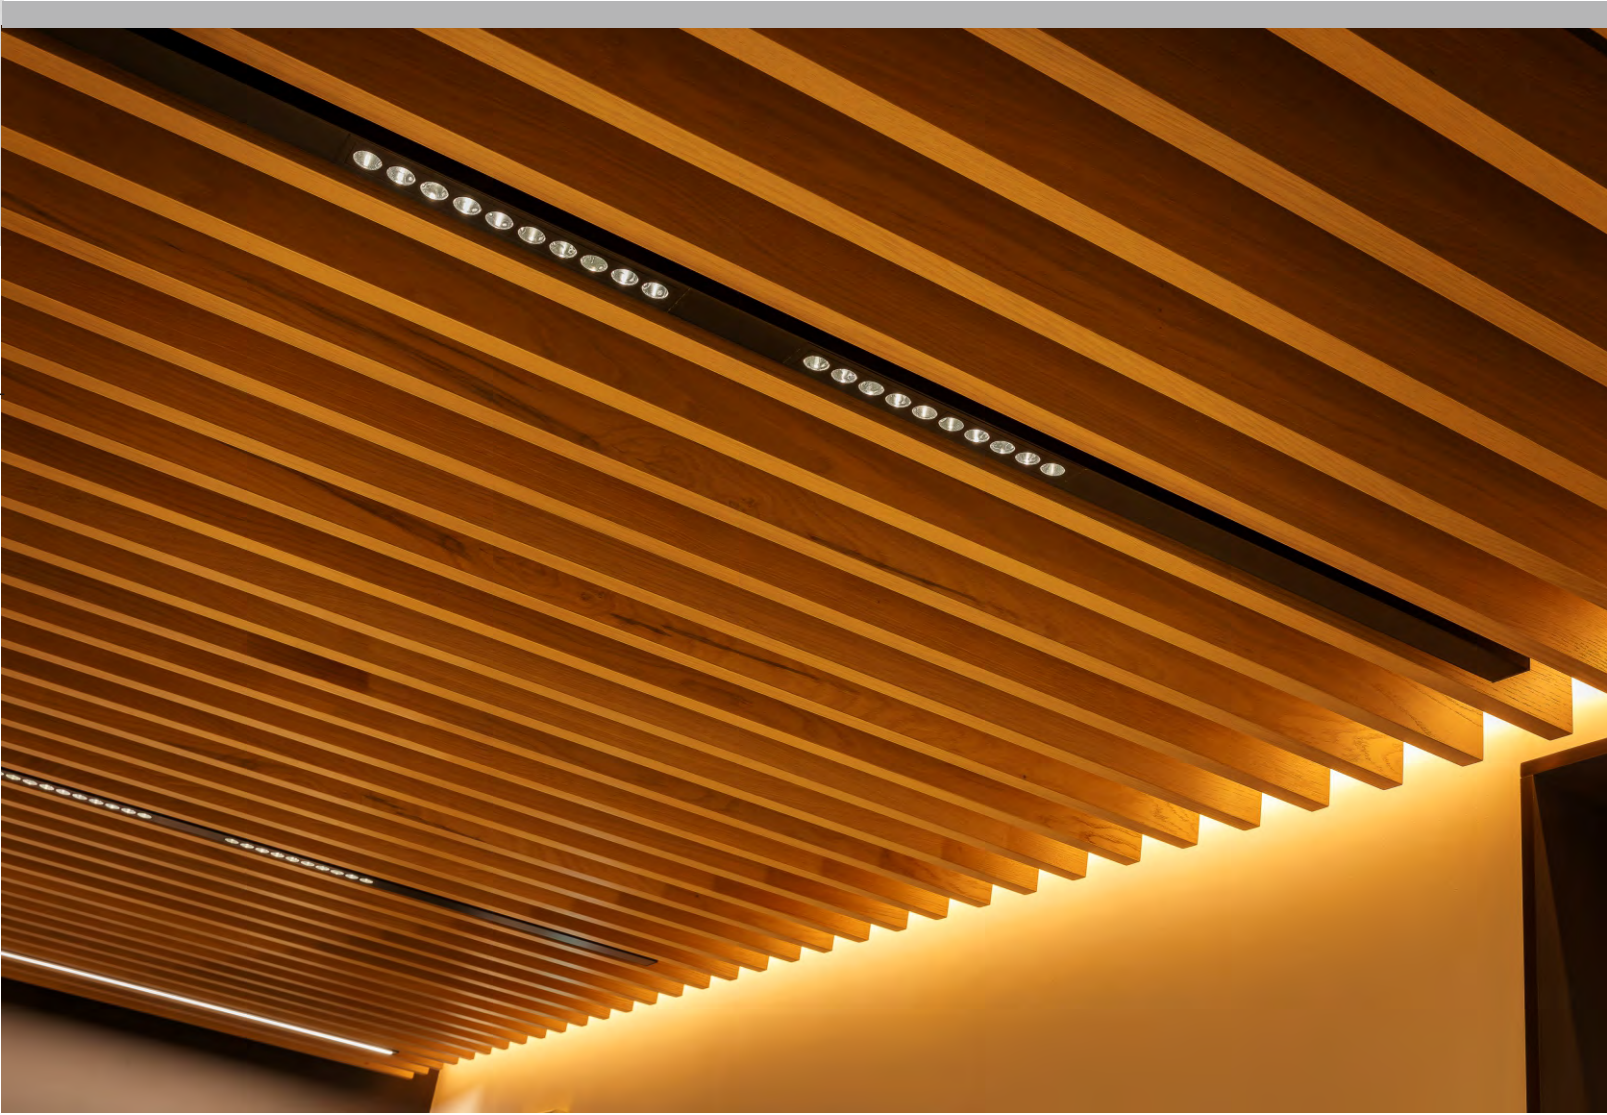

NEKO/ **FUSION** Linear System
FL1800-GL1800/ FL1200-GL1200

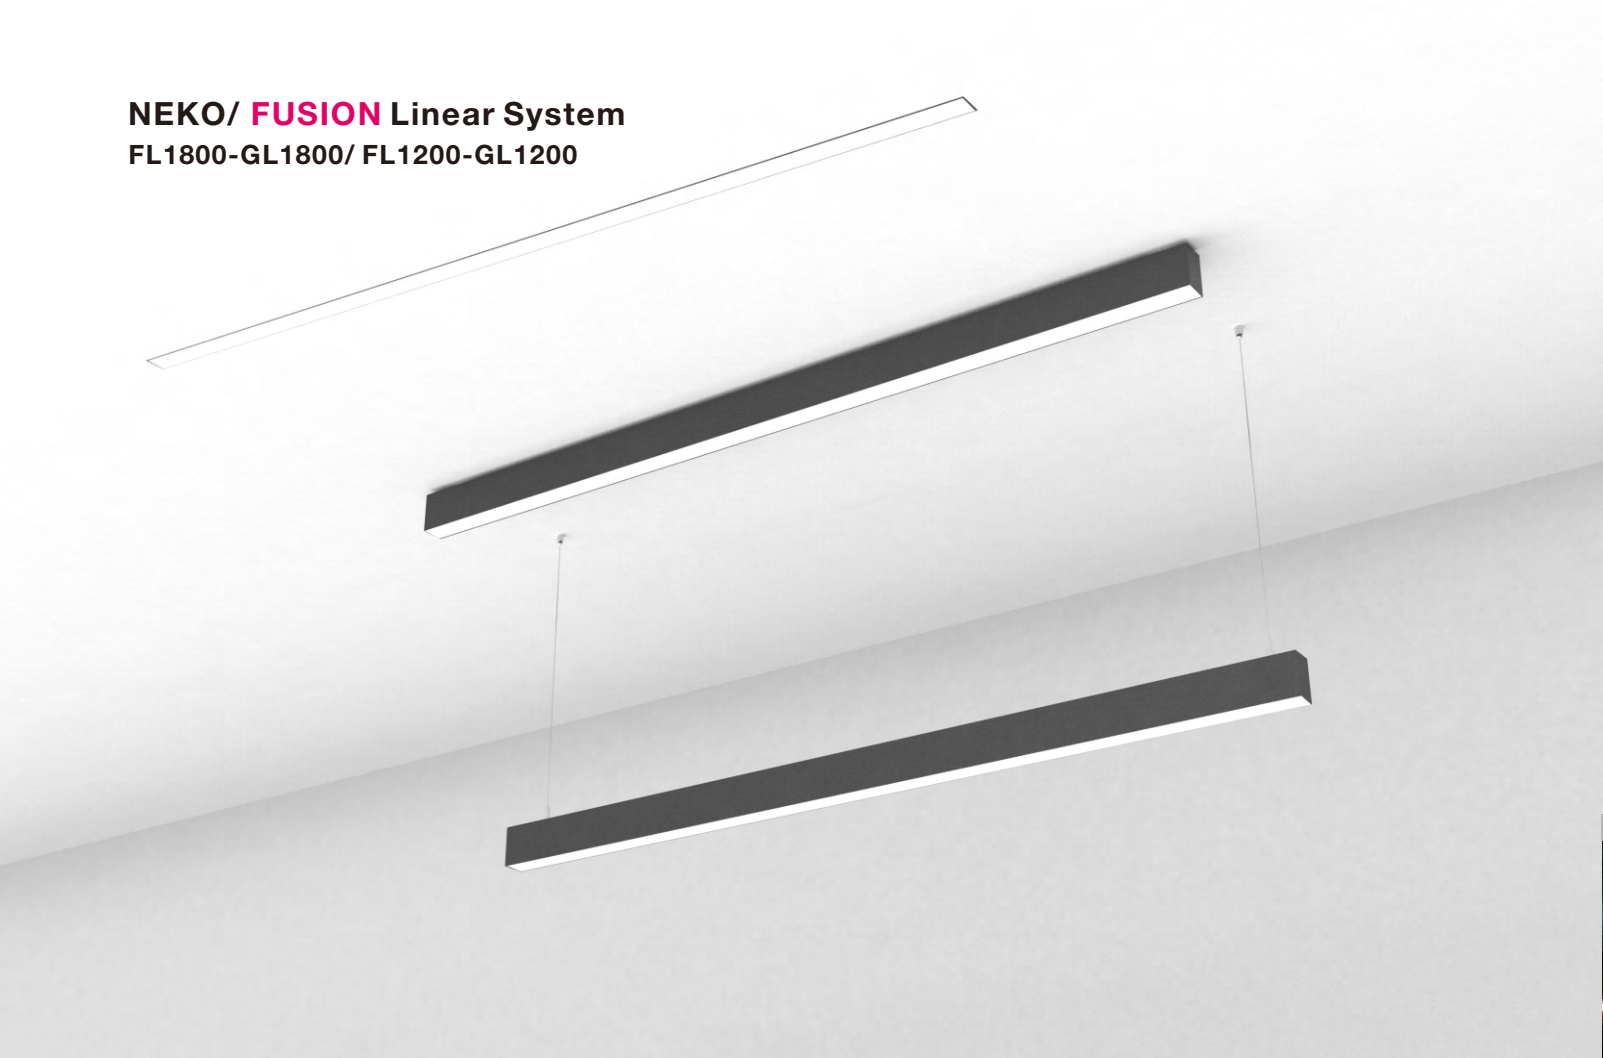


Project: Catalina Bay,New Zealand




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model	
32 W	36 W	46V	700 mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(Y)-GL1800-32W-827F	
					3000K	105°	4800lm	3600lm	1800mm	FL1800(Y)-GL1800-32W-830F	
					4000K	105°	5000lm	3800lm	1800mm	FL1800(Y)-GL1800-32W-840F	
48 W	52 W	46V	700+350 mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(Y)-GL1800-48W-827F	
					3000K	105°	6400lm	5200lm	1800mm	FL1800(Y)-GL1800-48W-830F	
					4000K	105°	7000lm	5500lm	1800mm	FL1800(Y)-GL1800-48W-840F	

22 W	26 W	46V	500 mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(Y)-GL1200-22W-827F	
					3000K	105°	3400lm	2700lm	1200mm	FL1200(Y)-GL1200-22W-830F	
					4000K	105°	3600lm	2900lm	1200mm	FL1200(Y)-GL1200-22W-840F	
32 W	36 W	46V	700 mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(Y)-GL1200-32W-827F	
					3000K	105°	4400lm	3600lm	1200mm	FL1200(Y)-GL1200-32W-830F	
					4000K	105°	4800lm	3800lm	1200mm	FL1200(Y)-GL1200-32W-840F	


Remark: (M)= P (Pendant) (M)= S (Surface mounted) (M)= R (Trimless Recessed) (M)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

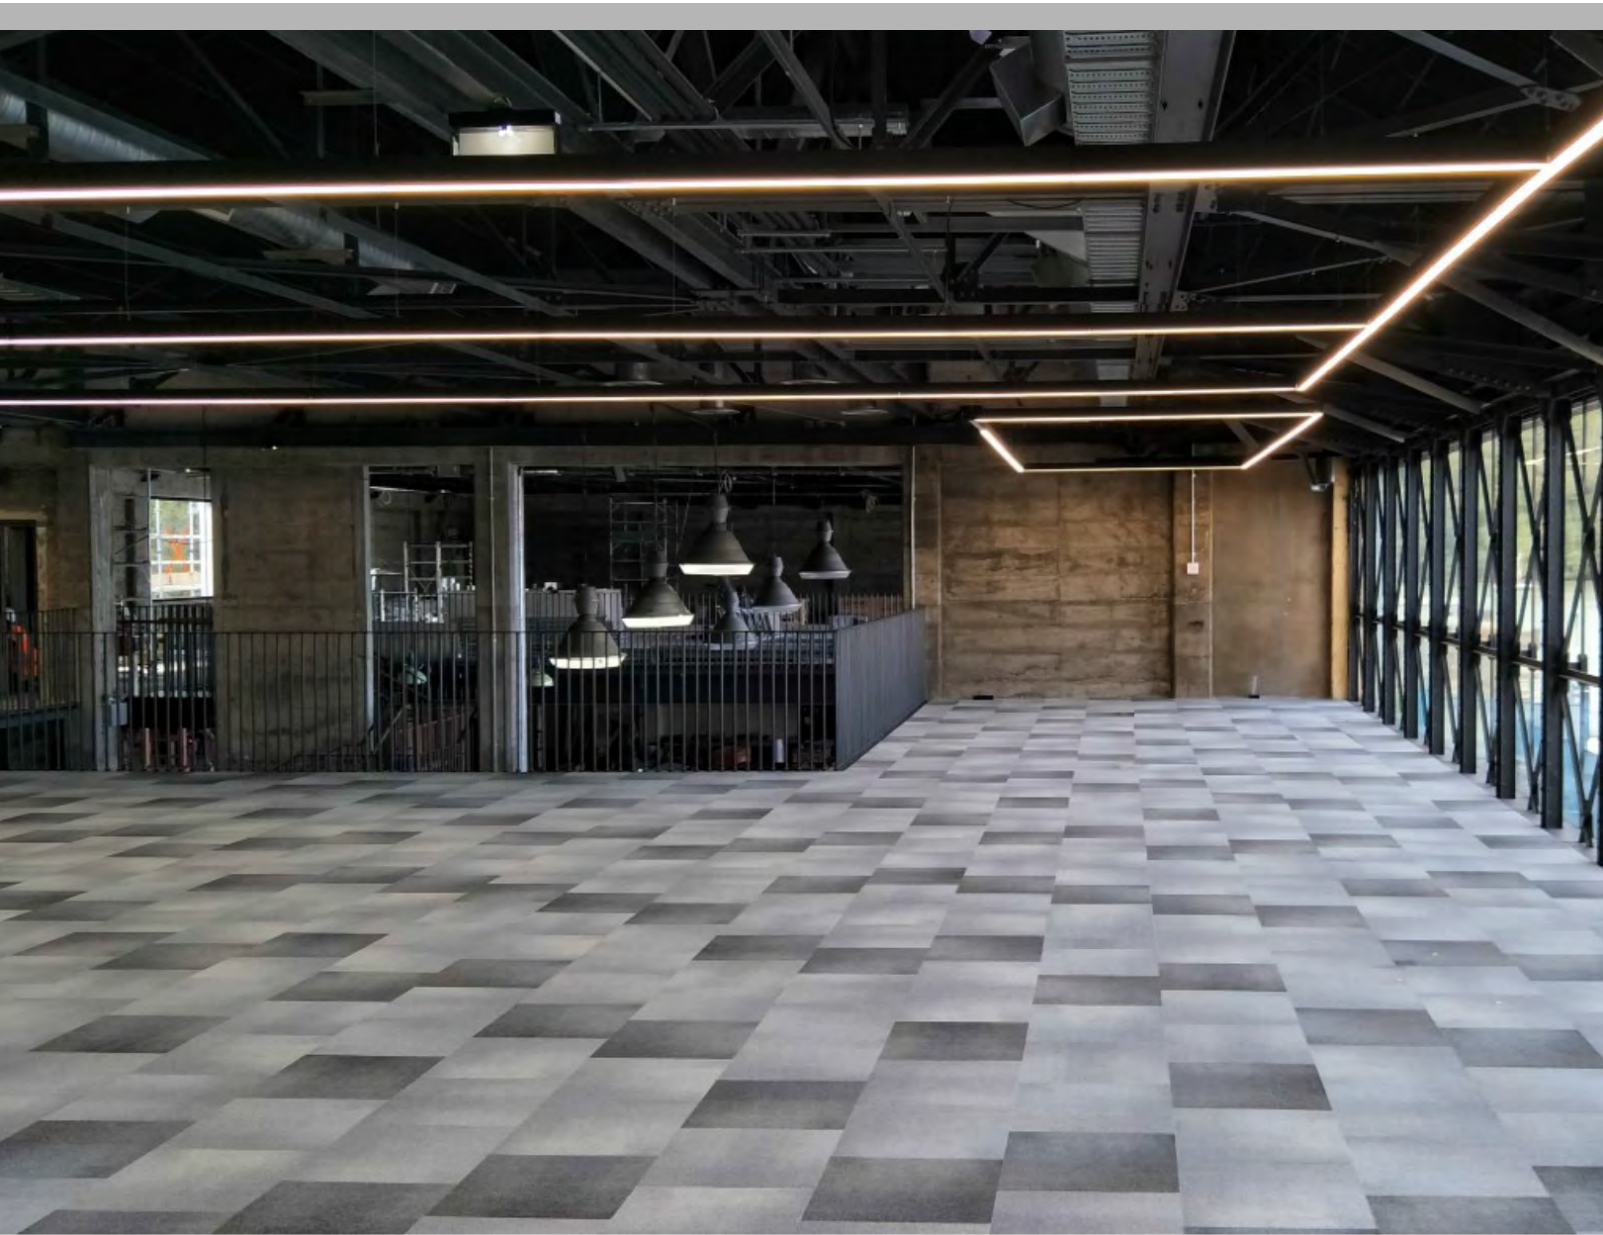

NEKO/ **FUSION** Linear System
FL1800-WW1800/ FL1200-WW1200

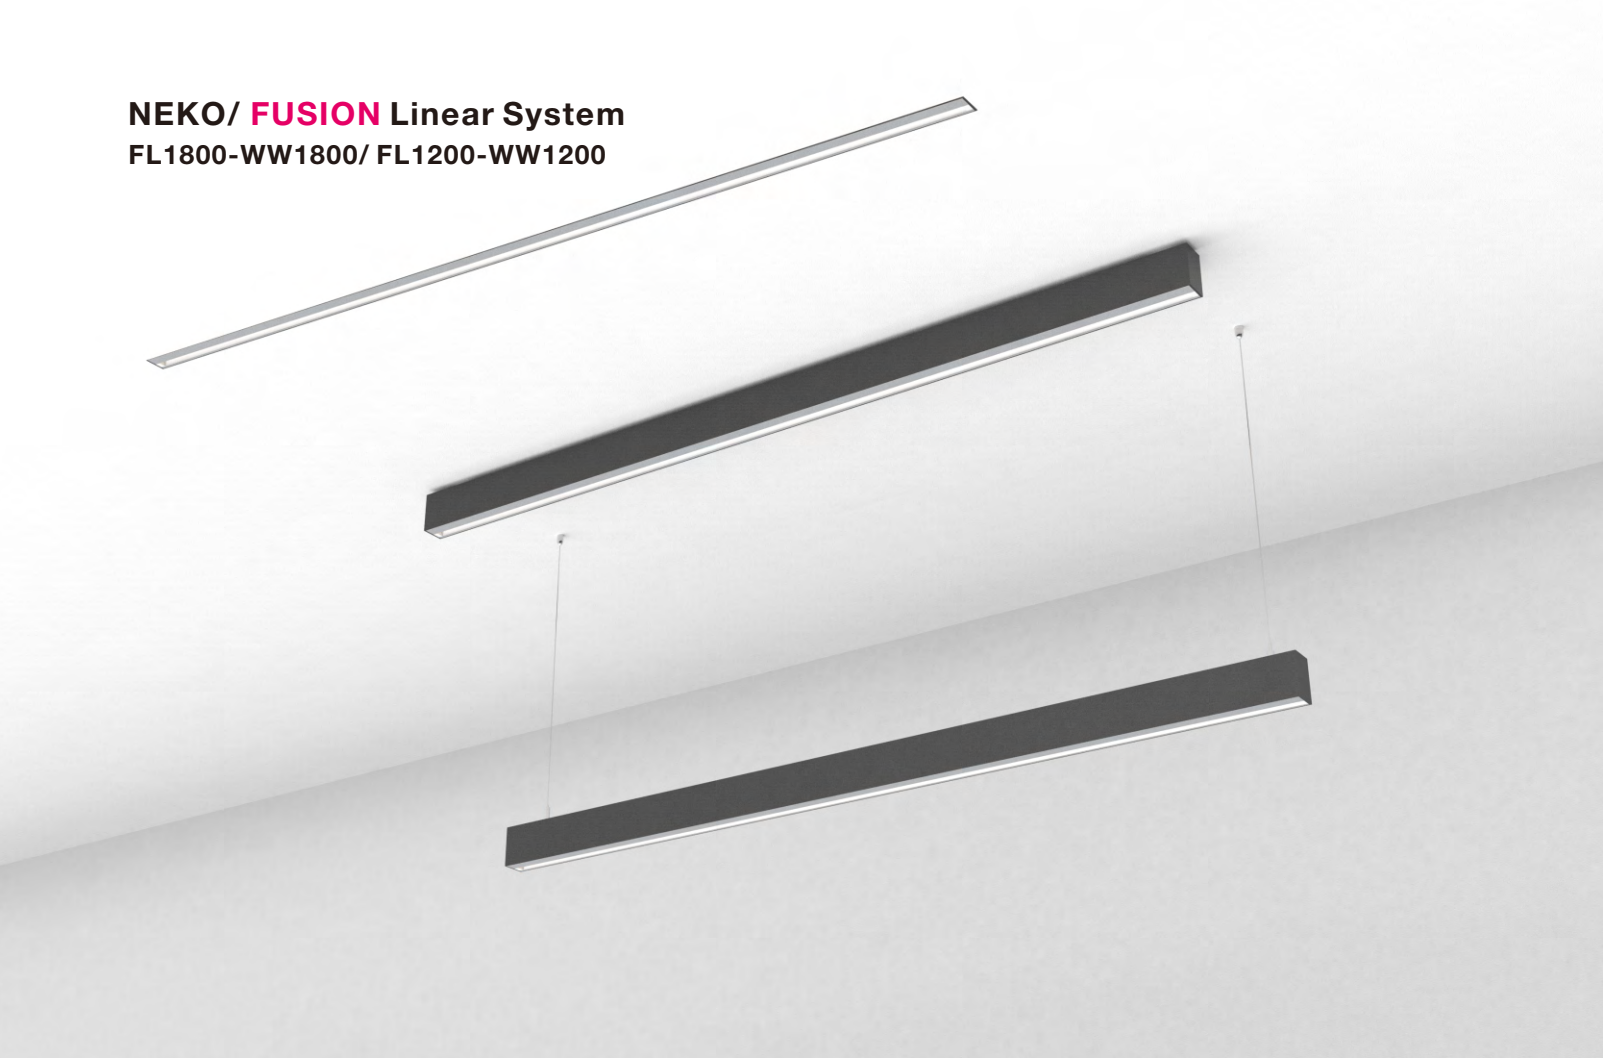

Project: School, Uruguay




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(Y)-WW1800-32W-827F
					3000K	WW	4800lm	2700lm	1800mm	FL1800(Y)-WW1800-32W-830F
					4000K	WW	5000lm	2900lm	1800mm	FL1800(Y)-WW1800-32W-840F
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(Y)-WW1800-48W-827F
					3000K	WW	6400lm	3500lm	1800mm	FL1800(Y)-WW1800-48W-830F
					4000K	WW	6600lm	3700lm	1800mm	FL1800(Y)-WW1800-48W-840F
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(Y)-WW1200-22W-827F
					3000K	WW	3400lm	1800lm	1200mm	FL1200(Y)-WW1200-22W-830F
					4000K	WW	3600lm	1900lm	1200mm	FL1200(Y)-WW1200-22W-840F
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	1200mm	FL1200(Y)-WW1200-32W-827F
					3000K	WW	4800lm	2500lm	1200mm	FL1200(Y)-WW1200-32W-830F
					4000K	WW	5000lm	2700lm	1200mm	FL1200(Y)-WW1200-32W-840F

Remark: (Y)= P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO/ **FUSION** Linear System
FL1200-2*AL300/ FL1500-2*AL300

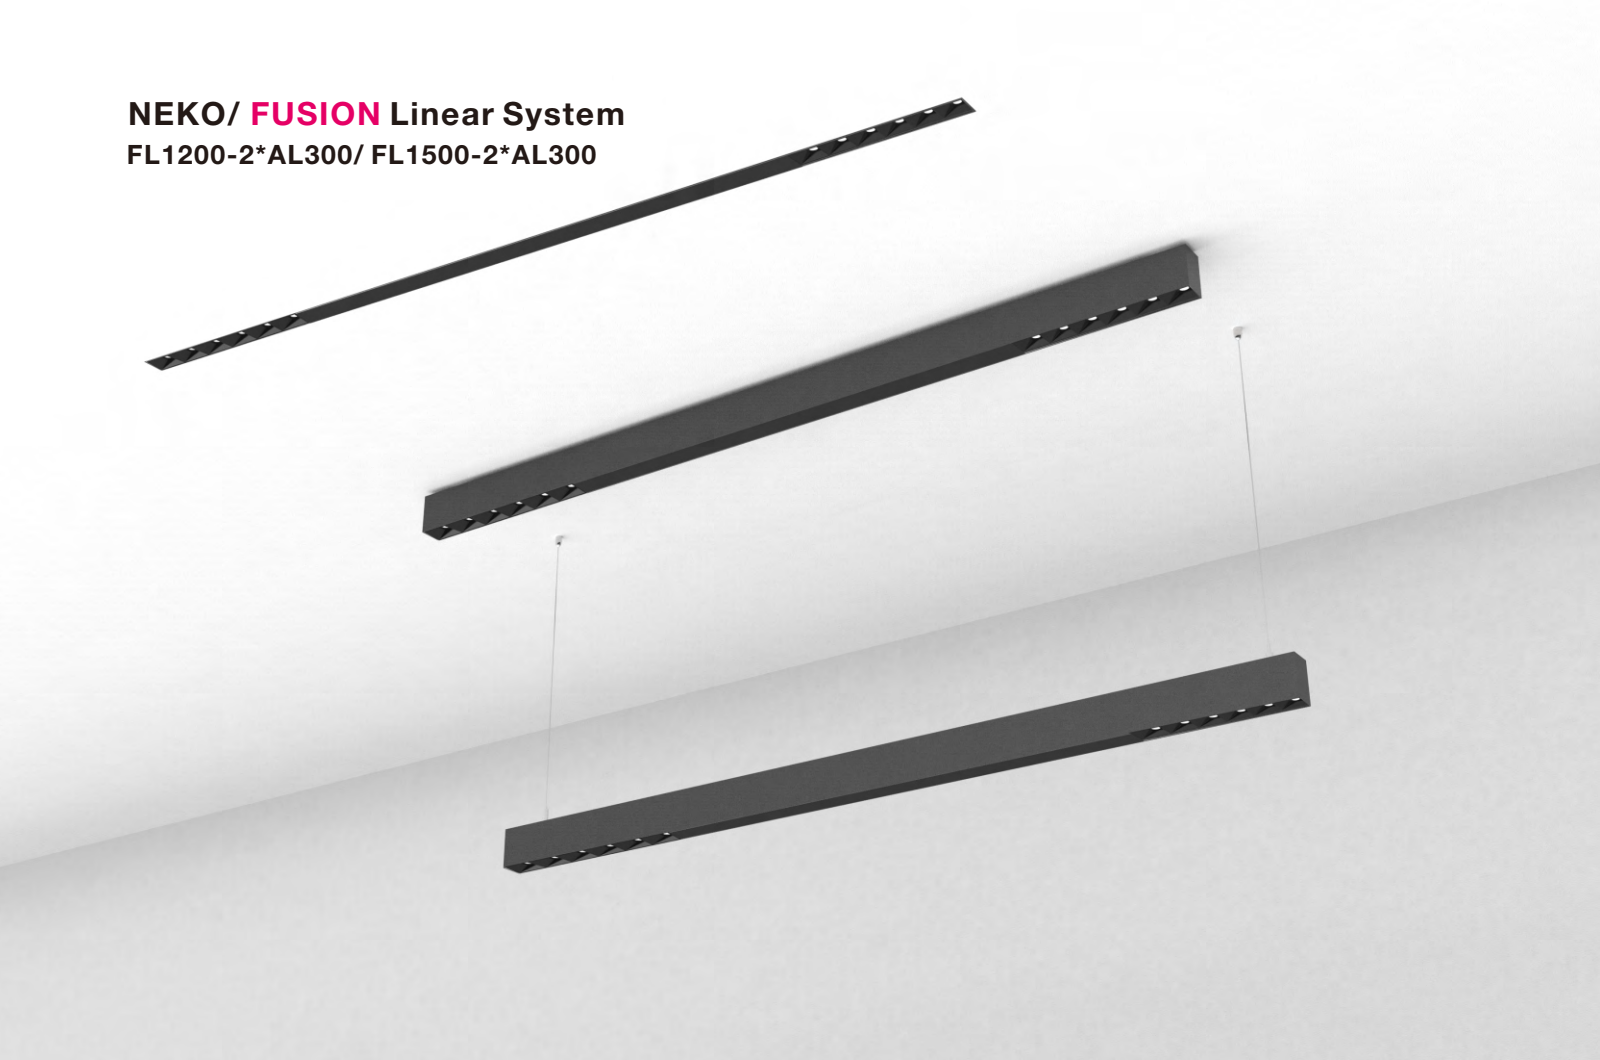

Project: Skyline Hill, Germany




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
26 W	30 W	36 V	700 mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-30D
					3000K	15°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-30D
					4000K	15°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-30D
					2700K	15°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-30D
26 W	30 W	36 V	700 mA	80	3000K	15°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-30D
					4000K	15°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-30D

Remark: (Y)= P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO/ **FUSION** Linear System
FL1200-2*AL300+GL600

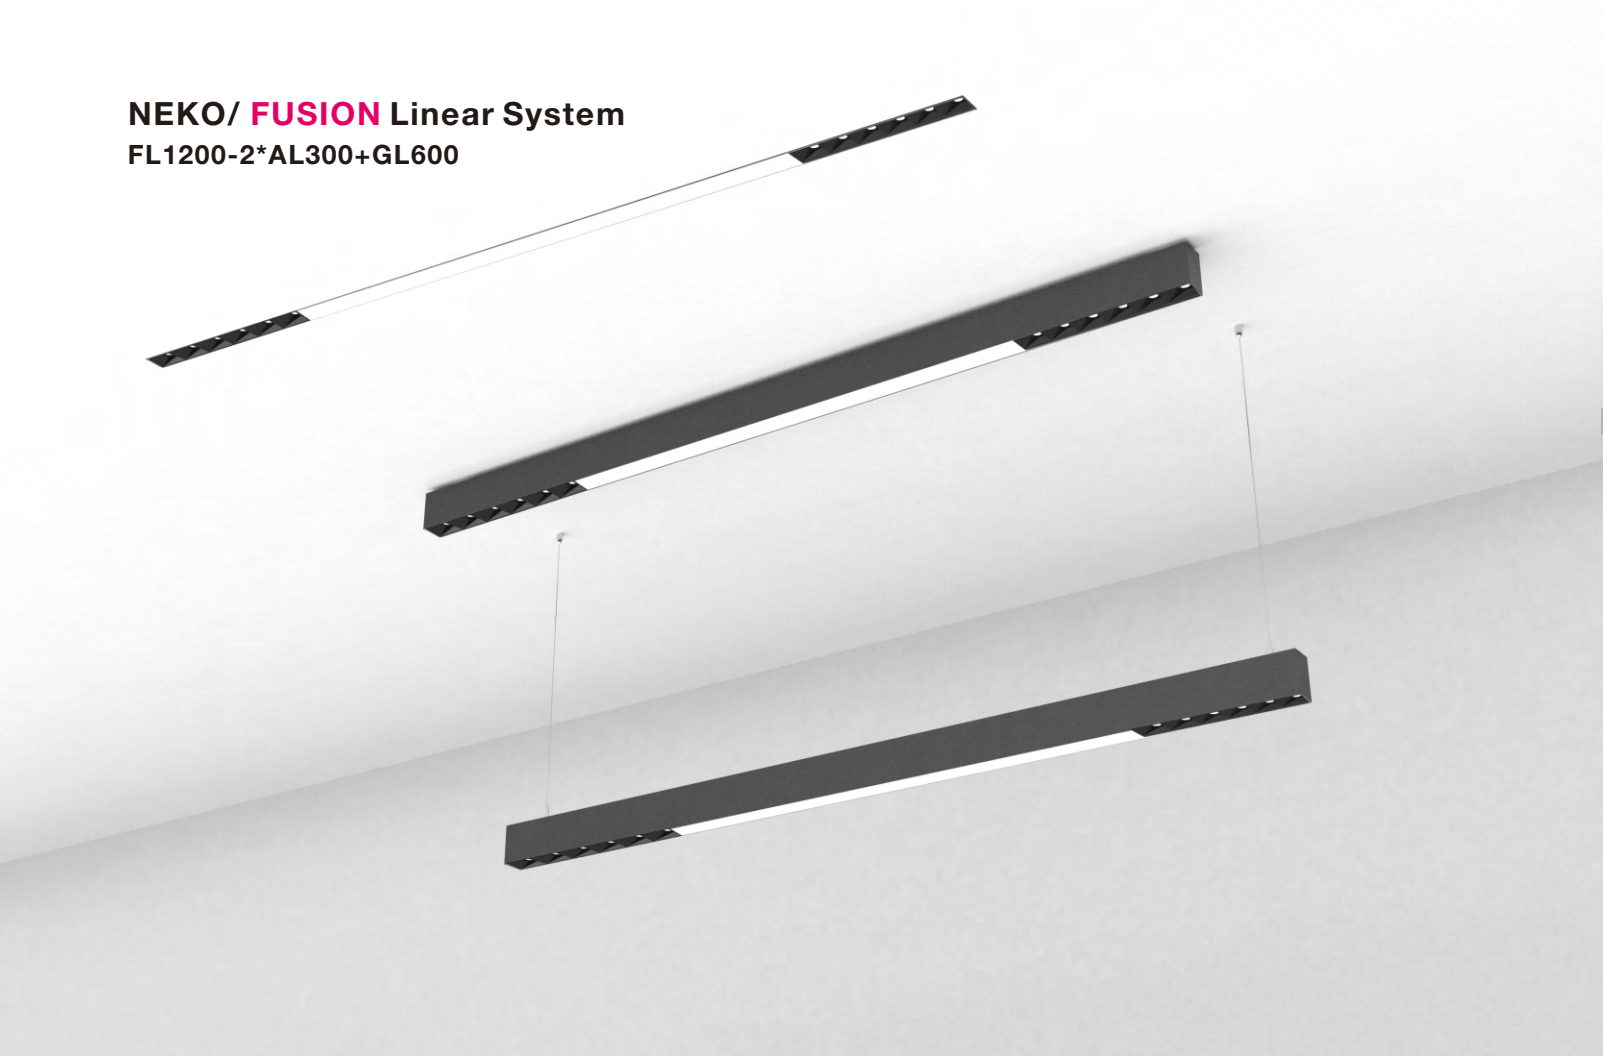


Project: Doctor's Office, Berlin, Germany



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model				
37	W	41	W	47	V	700	mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(M)-2*AL300+GL600-37W-827-15DF	
										30°+105°	4500lm	3300lm	FL1200(M)-2*AL300+GL600-37W-827-30DF	
										3000K	15°+105°	4700lm	3500lm	FL1200(M)-2*AL300+GL600-37W-830-15DF
											30°+105°	4700lm	3500lm	FL1200(M)-2*AL300+GL600-37W-830-30DF
										4000K	15°+105°	5100lm	3800lm	FL1200(M)-2*AL300+GL600-37W-840-15DF
											30°+105°	5100lm	3800lm	FL1200(M)-2*AL300+GL600-37W-840-30DF

Remark: (M)= P (Pendant) (M)= S (Surface mounted) (M)= R (Trimless Recessed) (M)= F (Trim Recessed)
Code Remark: N=N (No Driver) F=F (ON-OFF) P=P (Phase Dim) A=A (1-10V Dim) D=D (DALI Dim)

NEKO/**FUSION** Linear System
More modules combination available

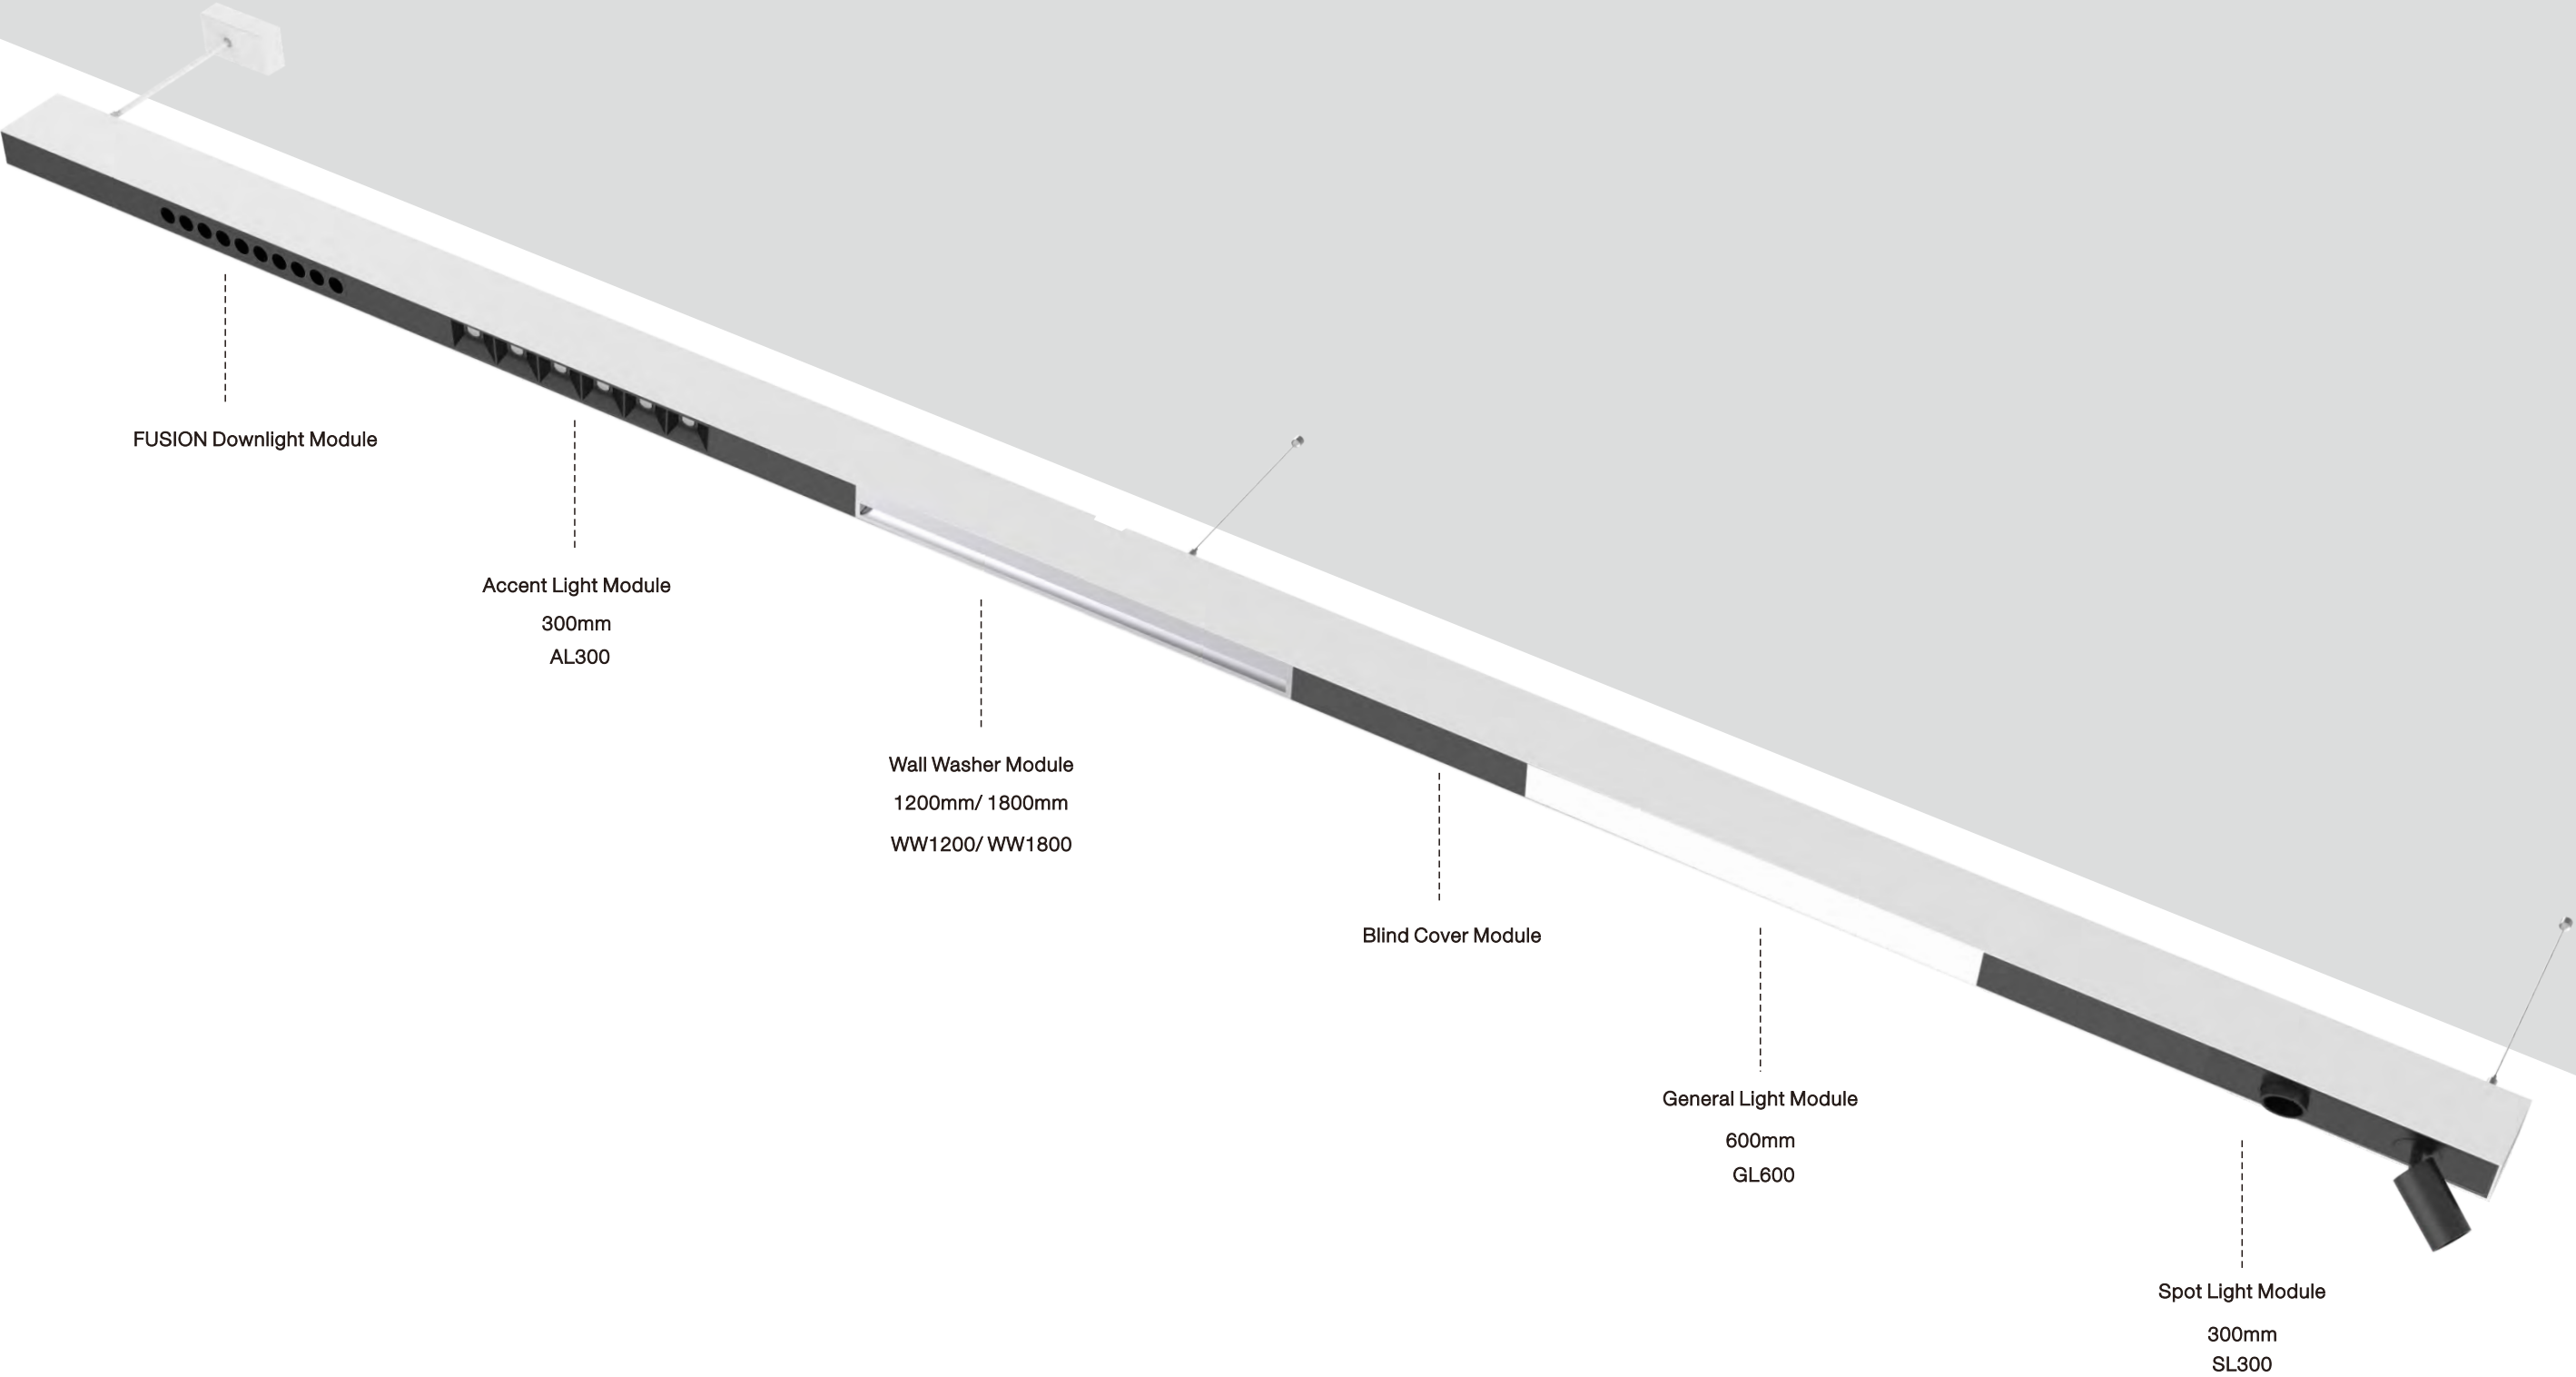


Linear System with more modules combination available.
All available with Suspended, surface mounted and recessed mounted versions.








Trimless Recessed Track-EI




Trimless Recessed Track




Trim Recessed Track




Slim Track









Standard Track





H Track

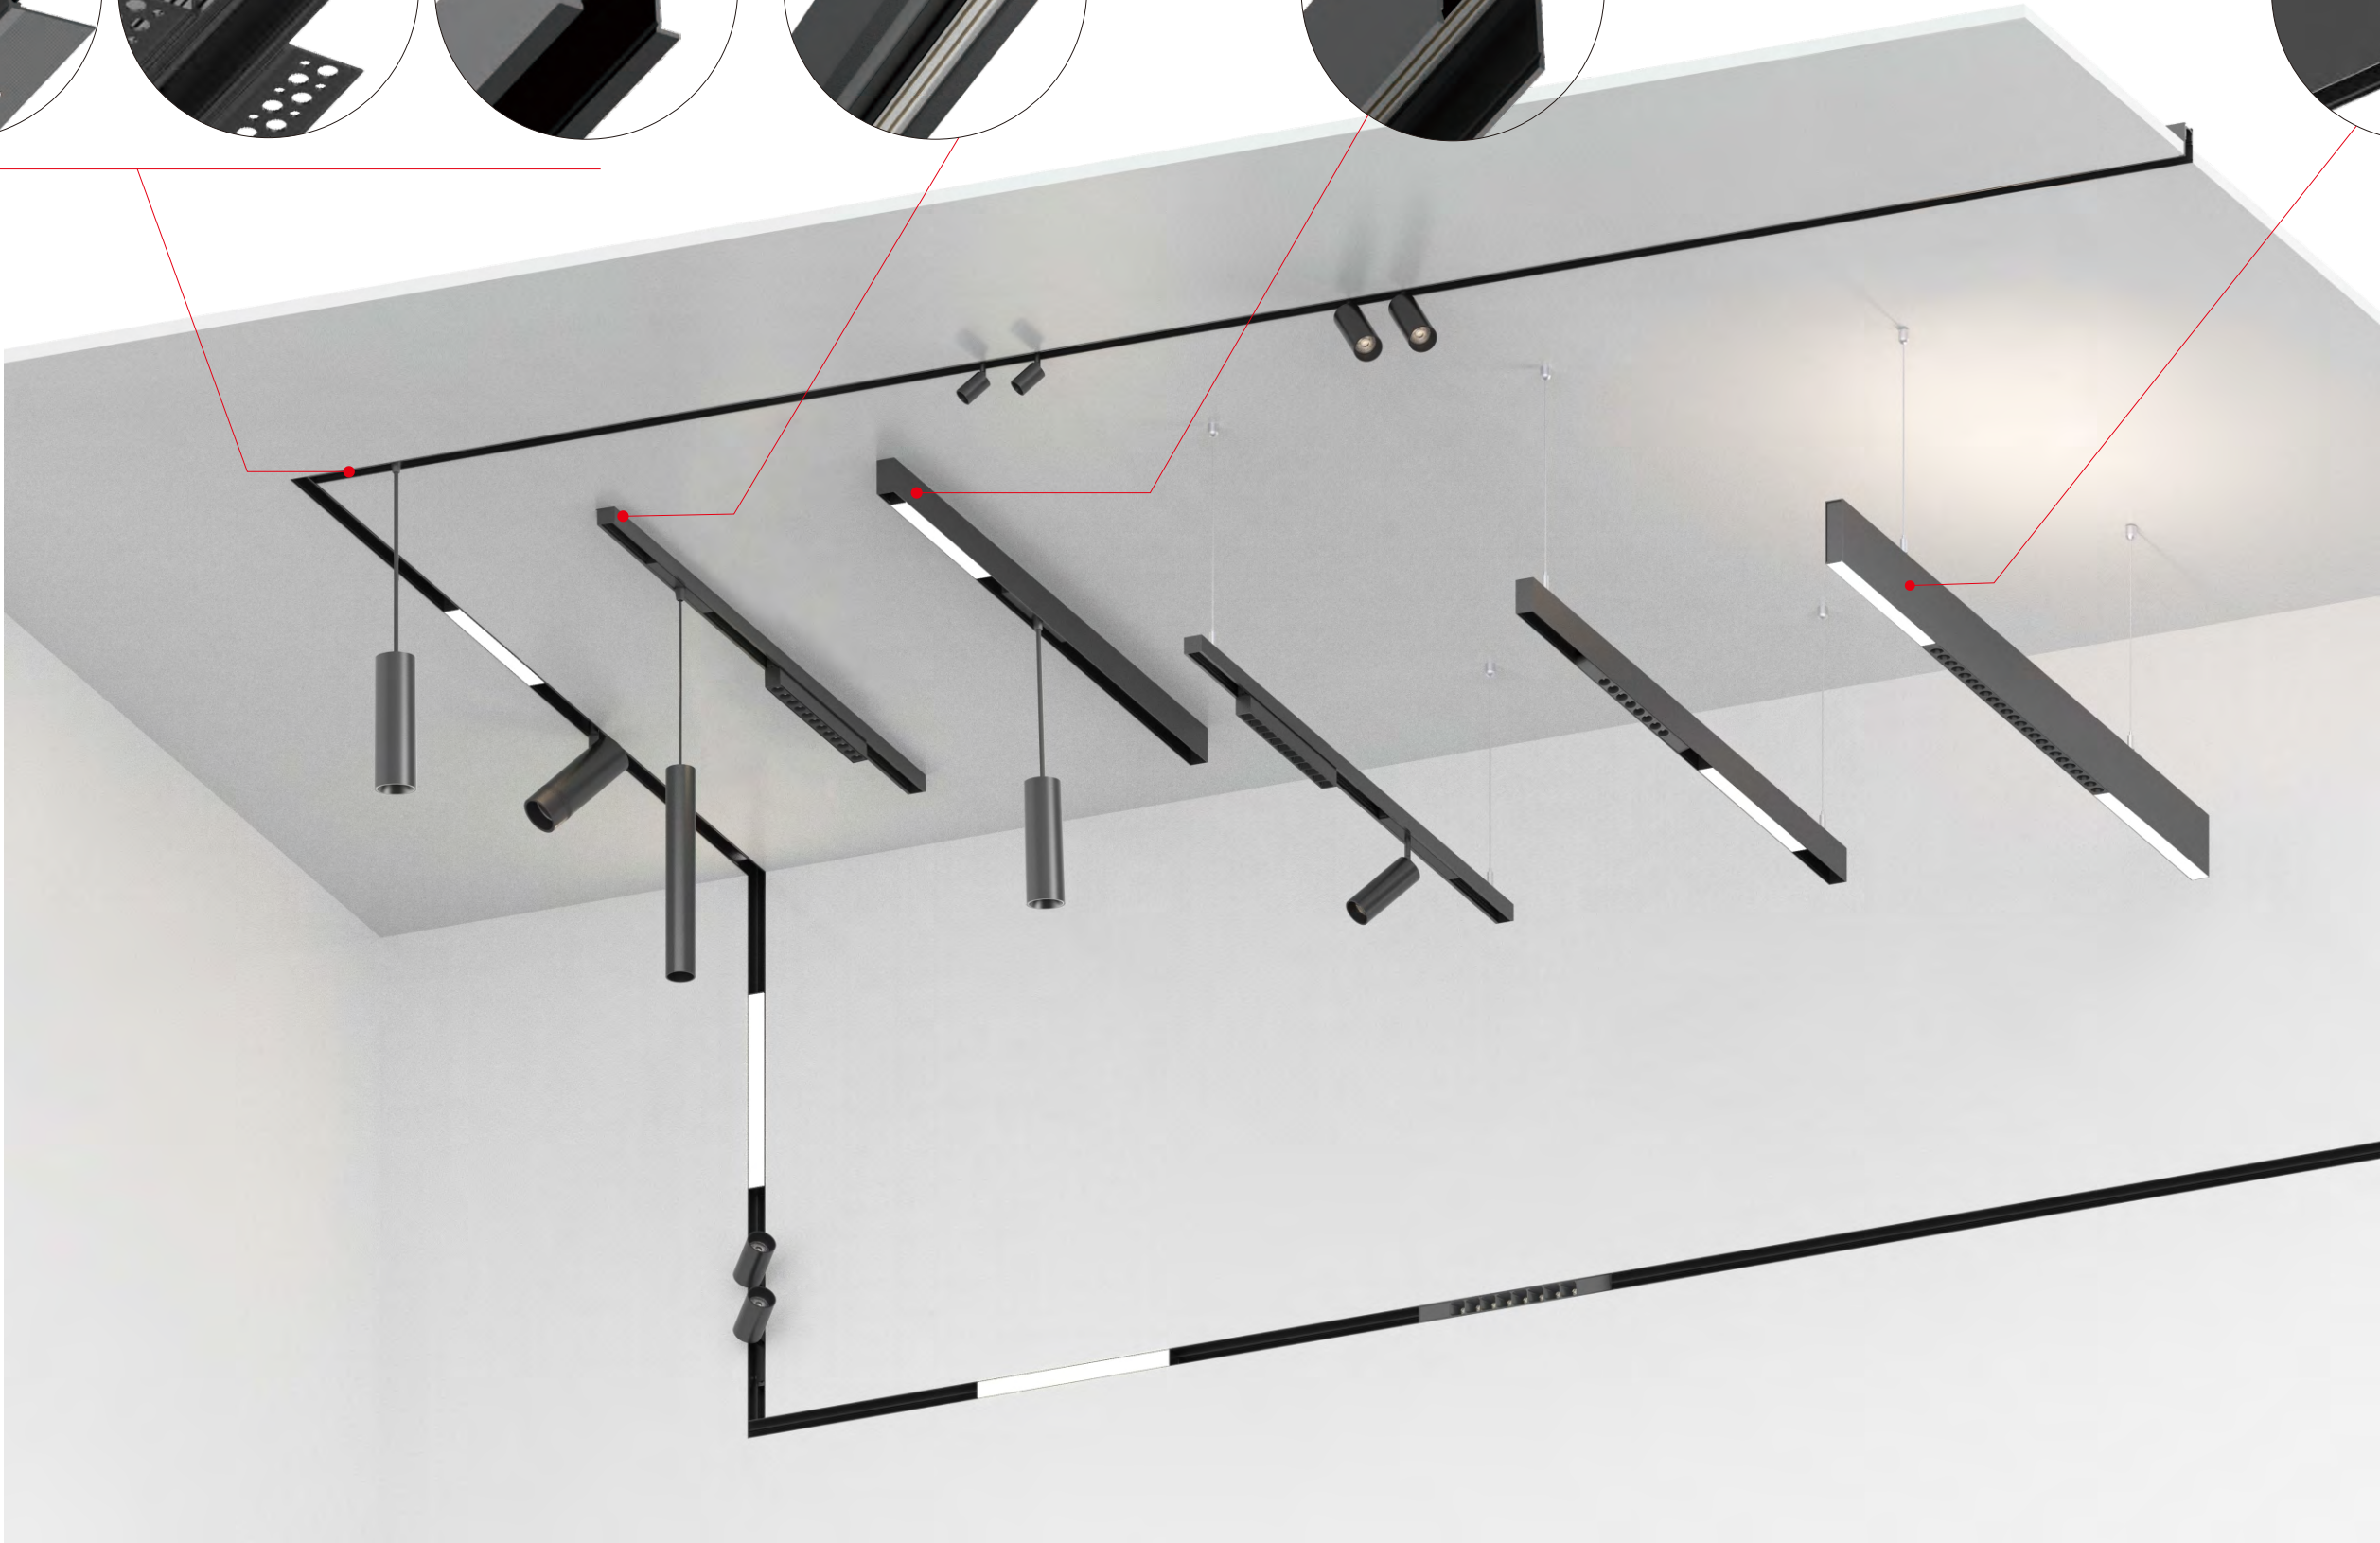



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System

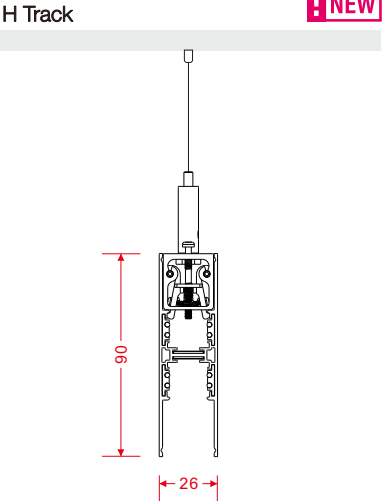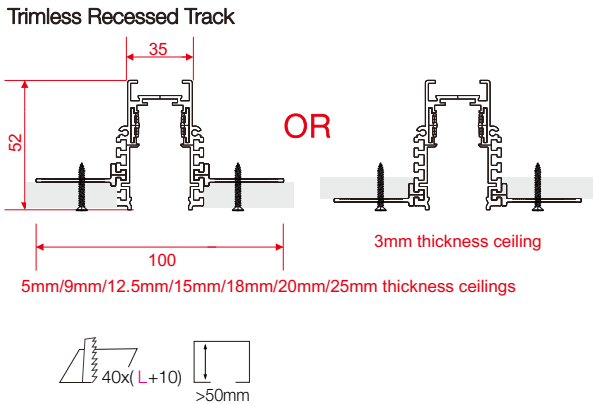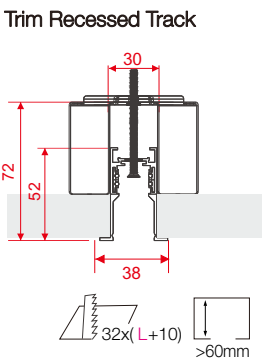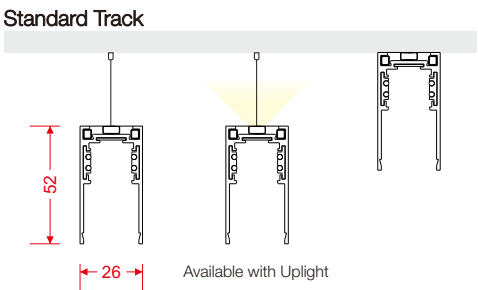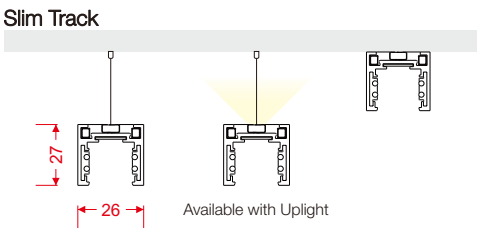



NEW

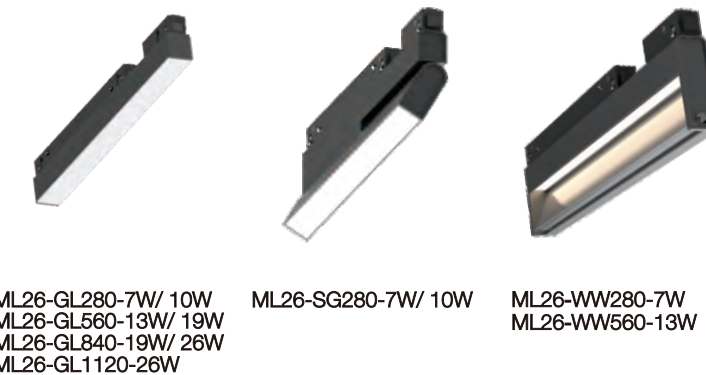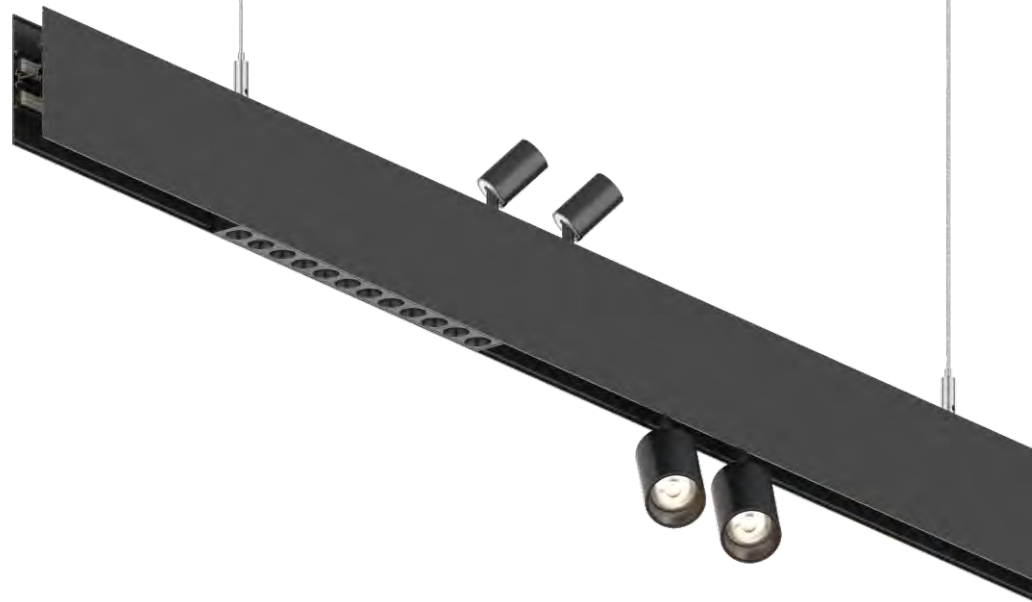


ML26-PS40-12W

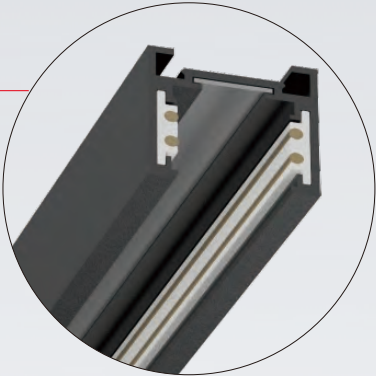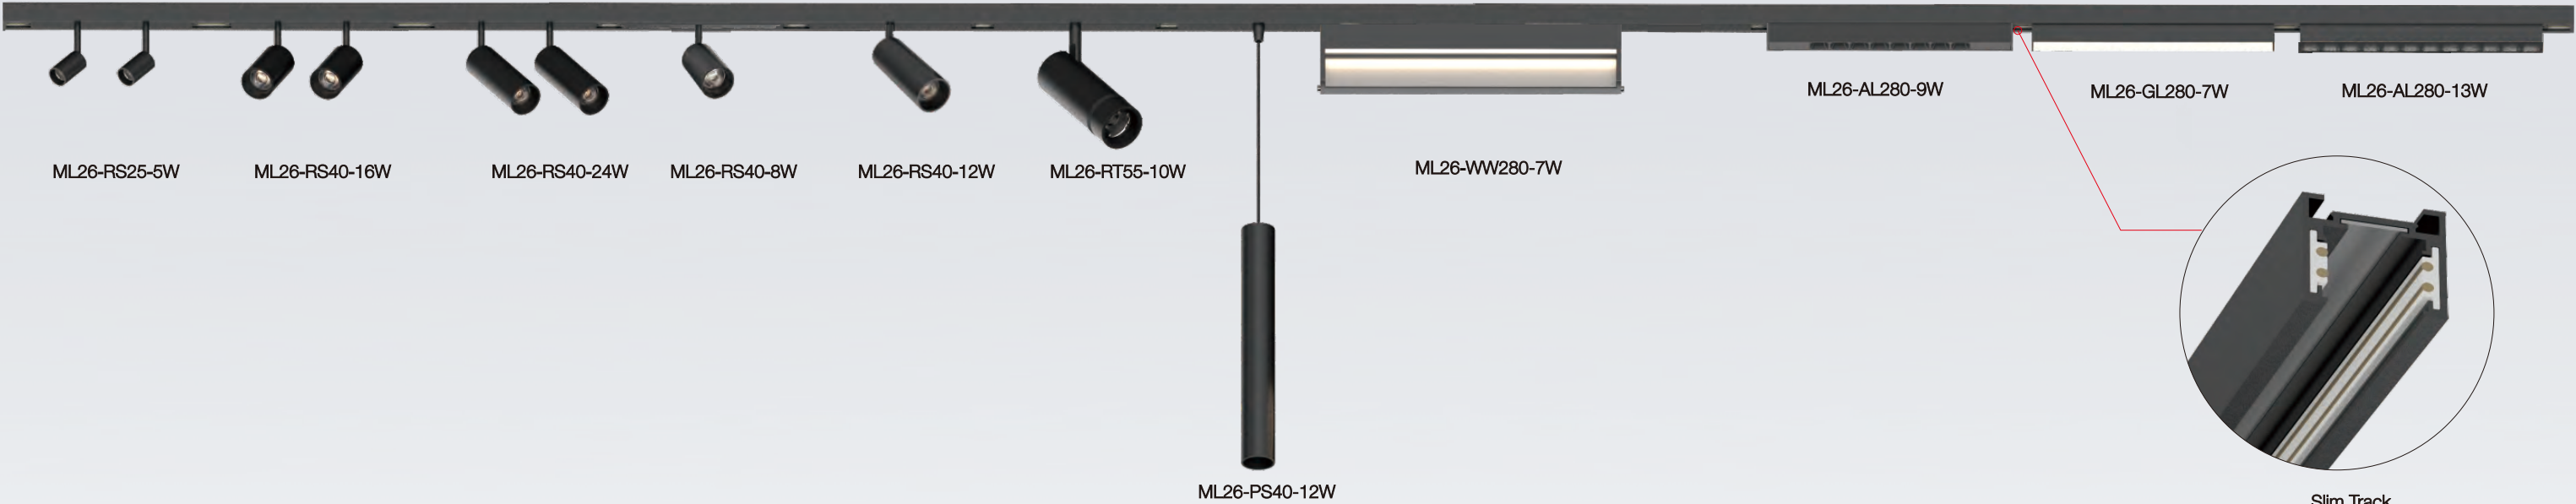



Slim Track

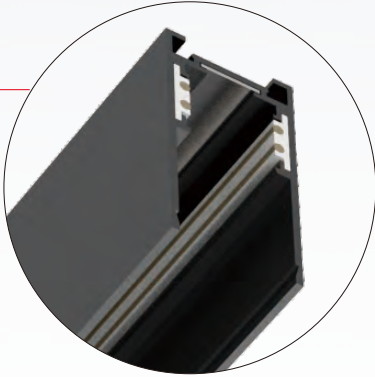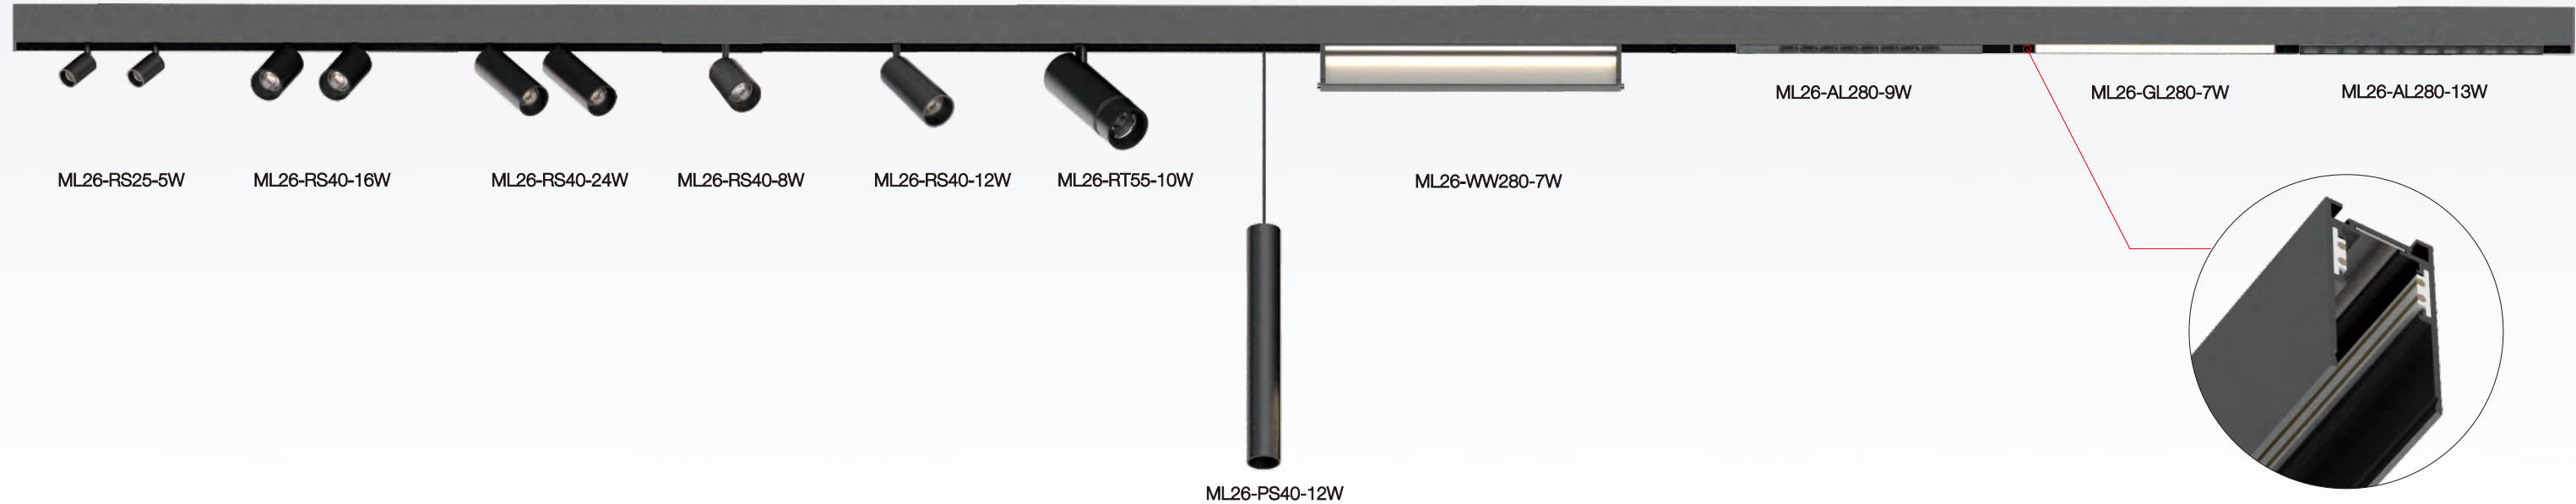


Standard Track



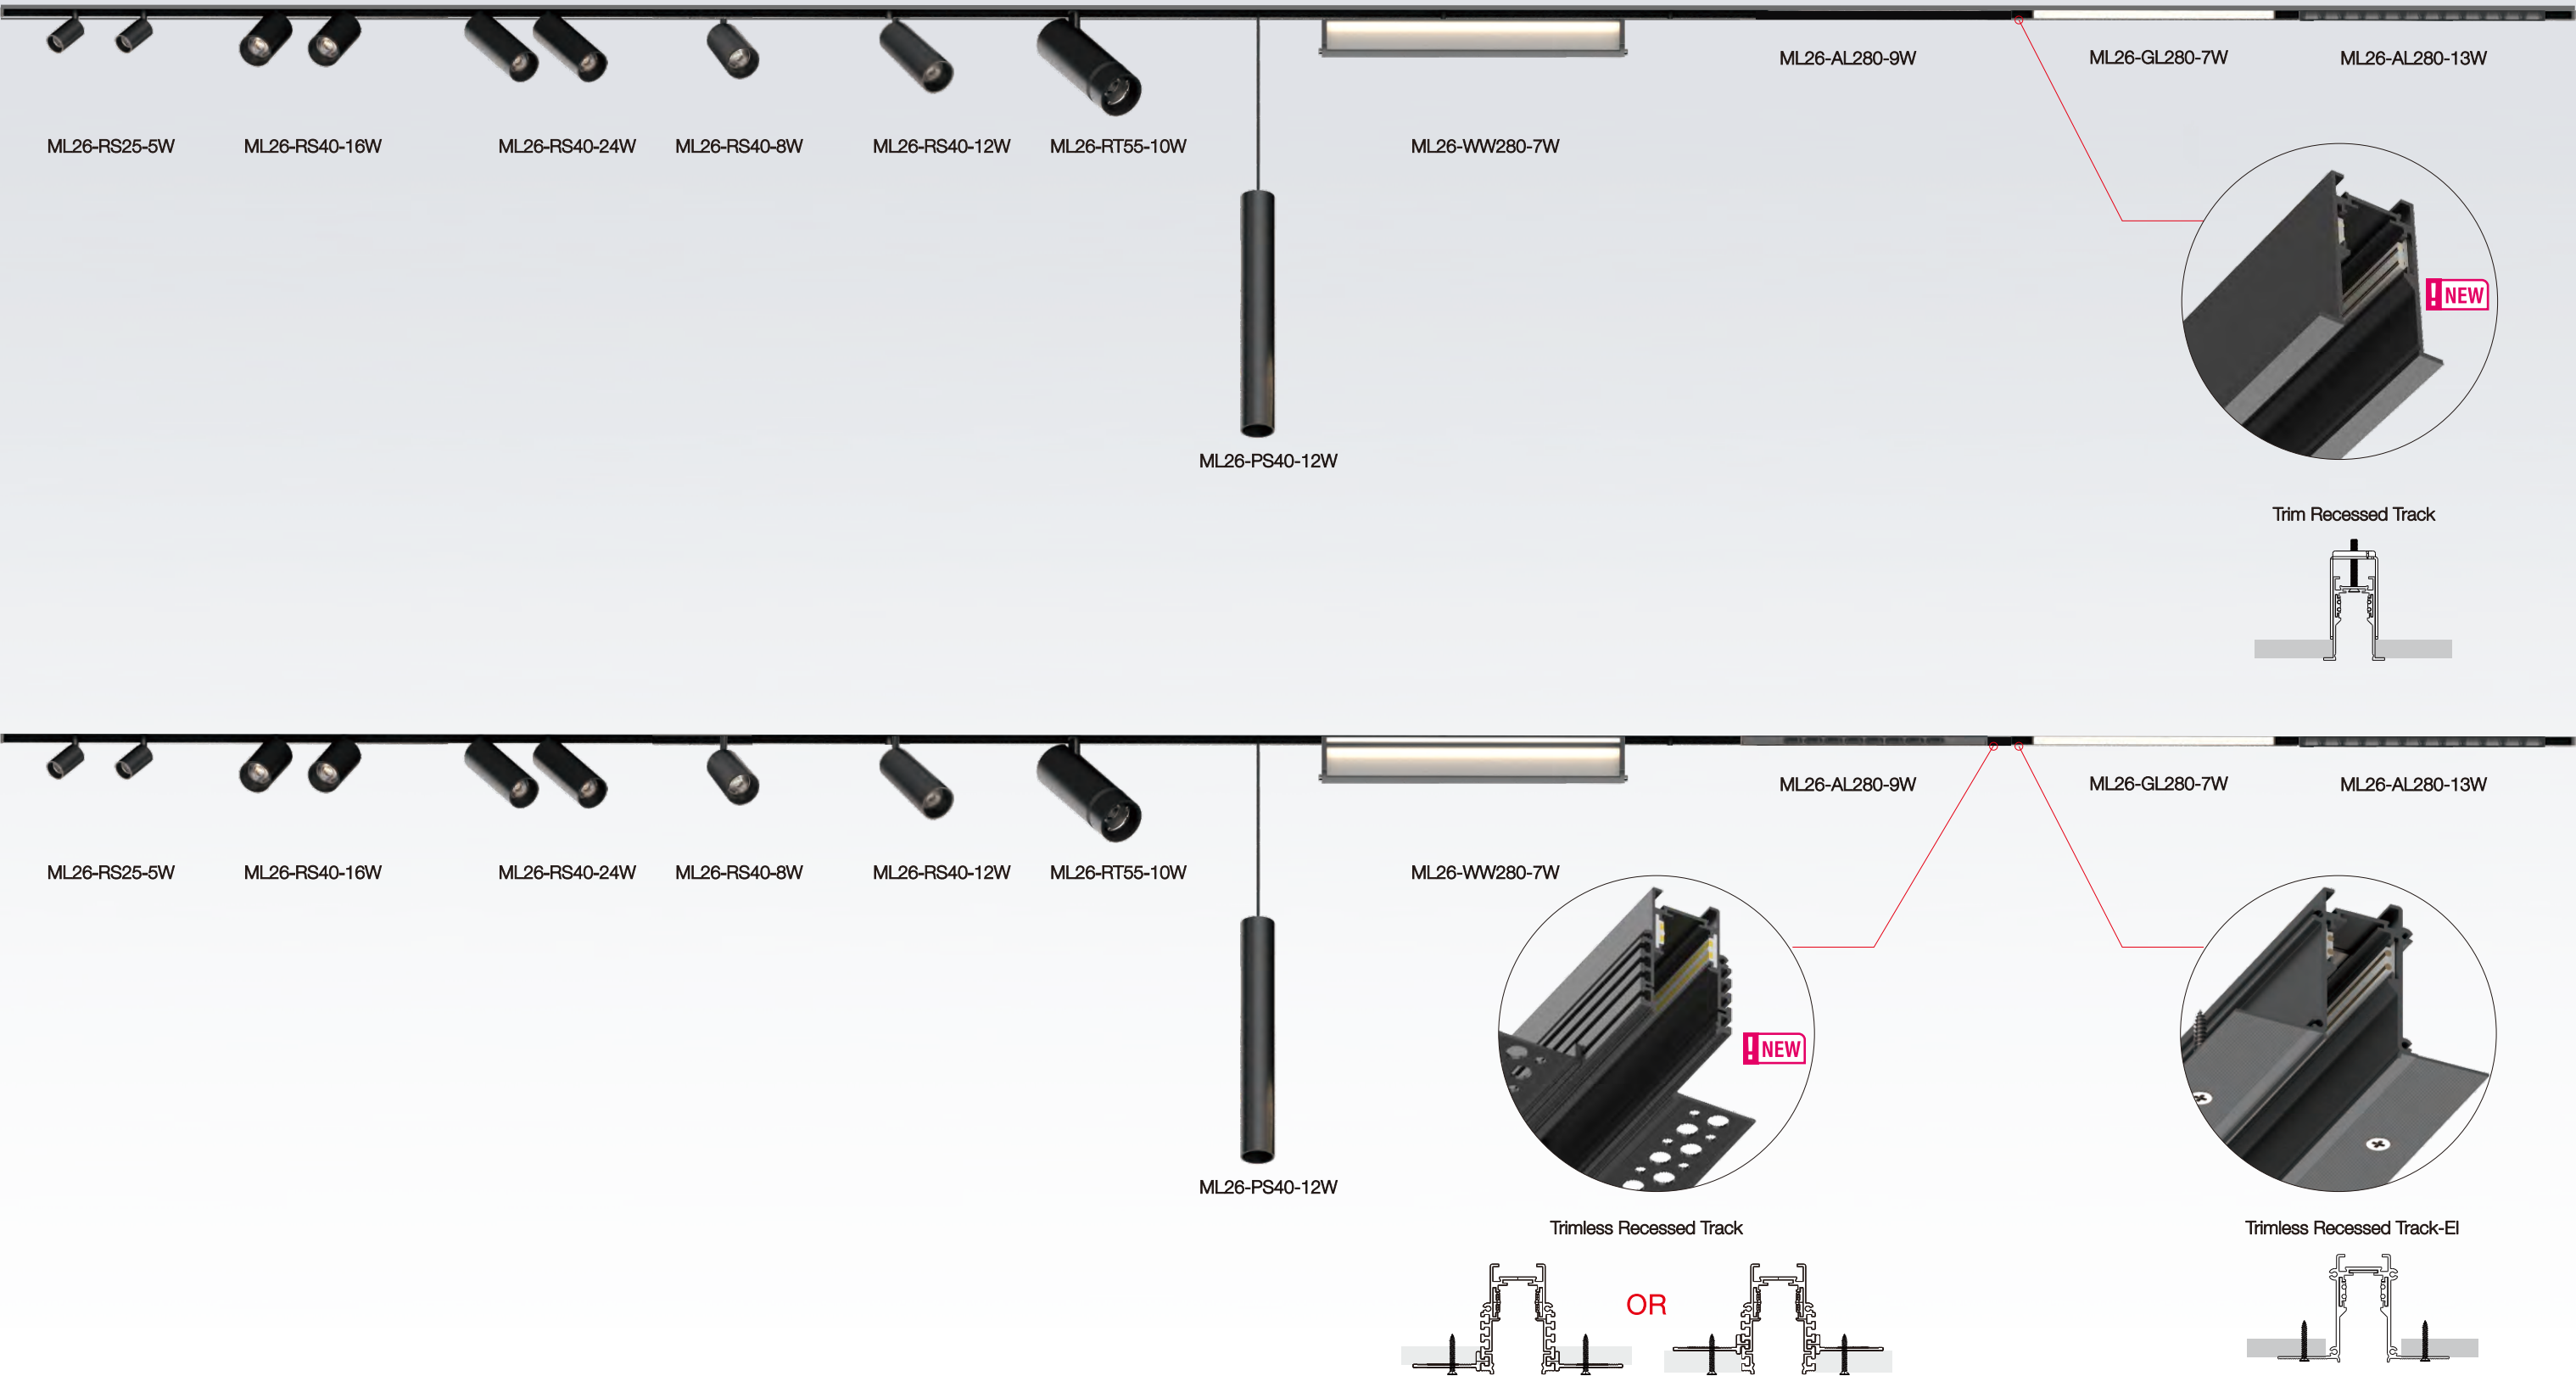

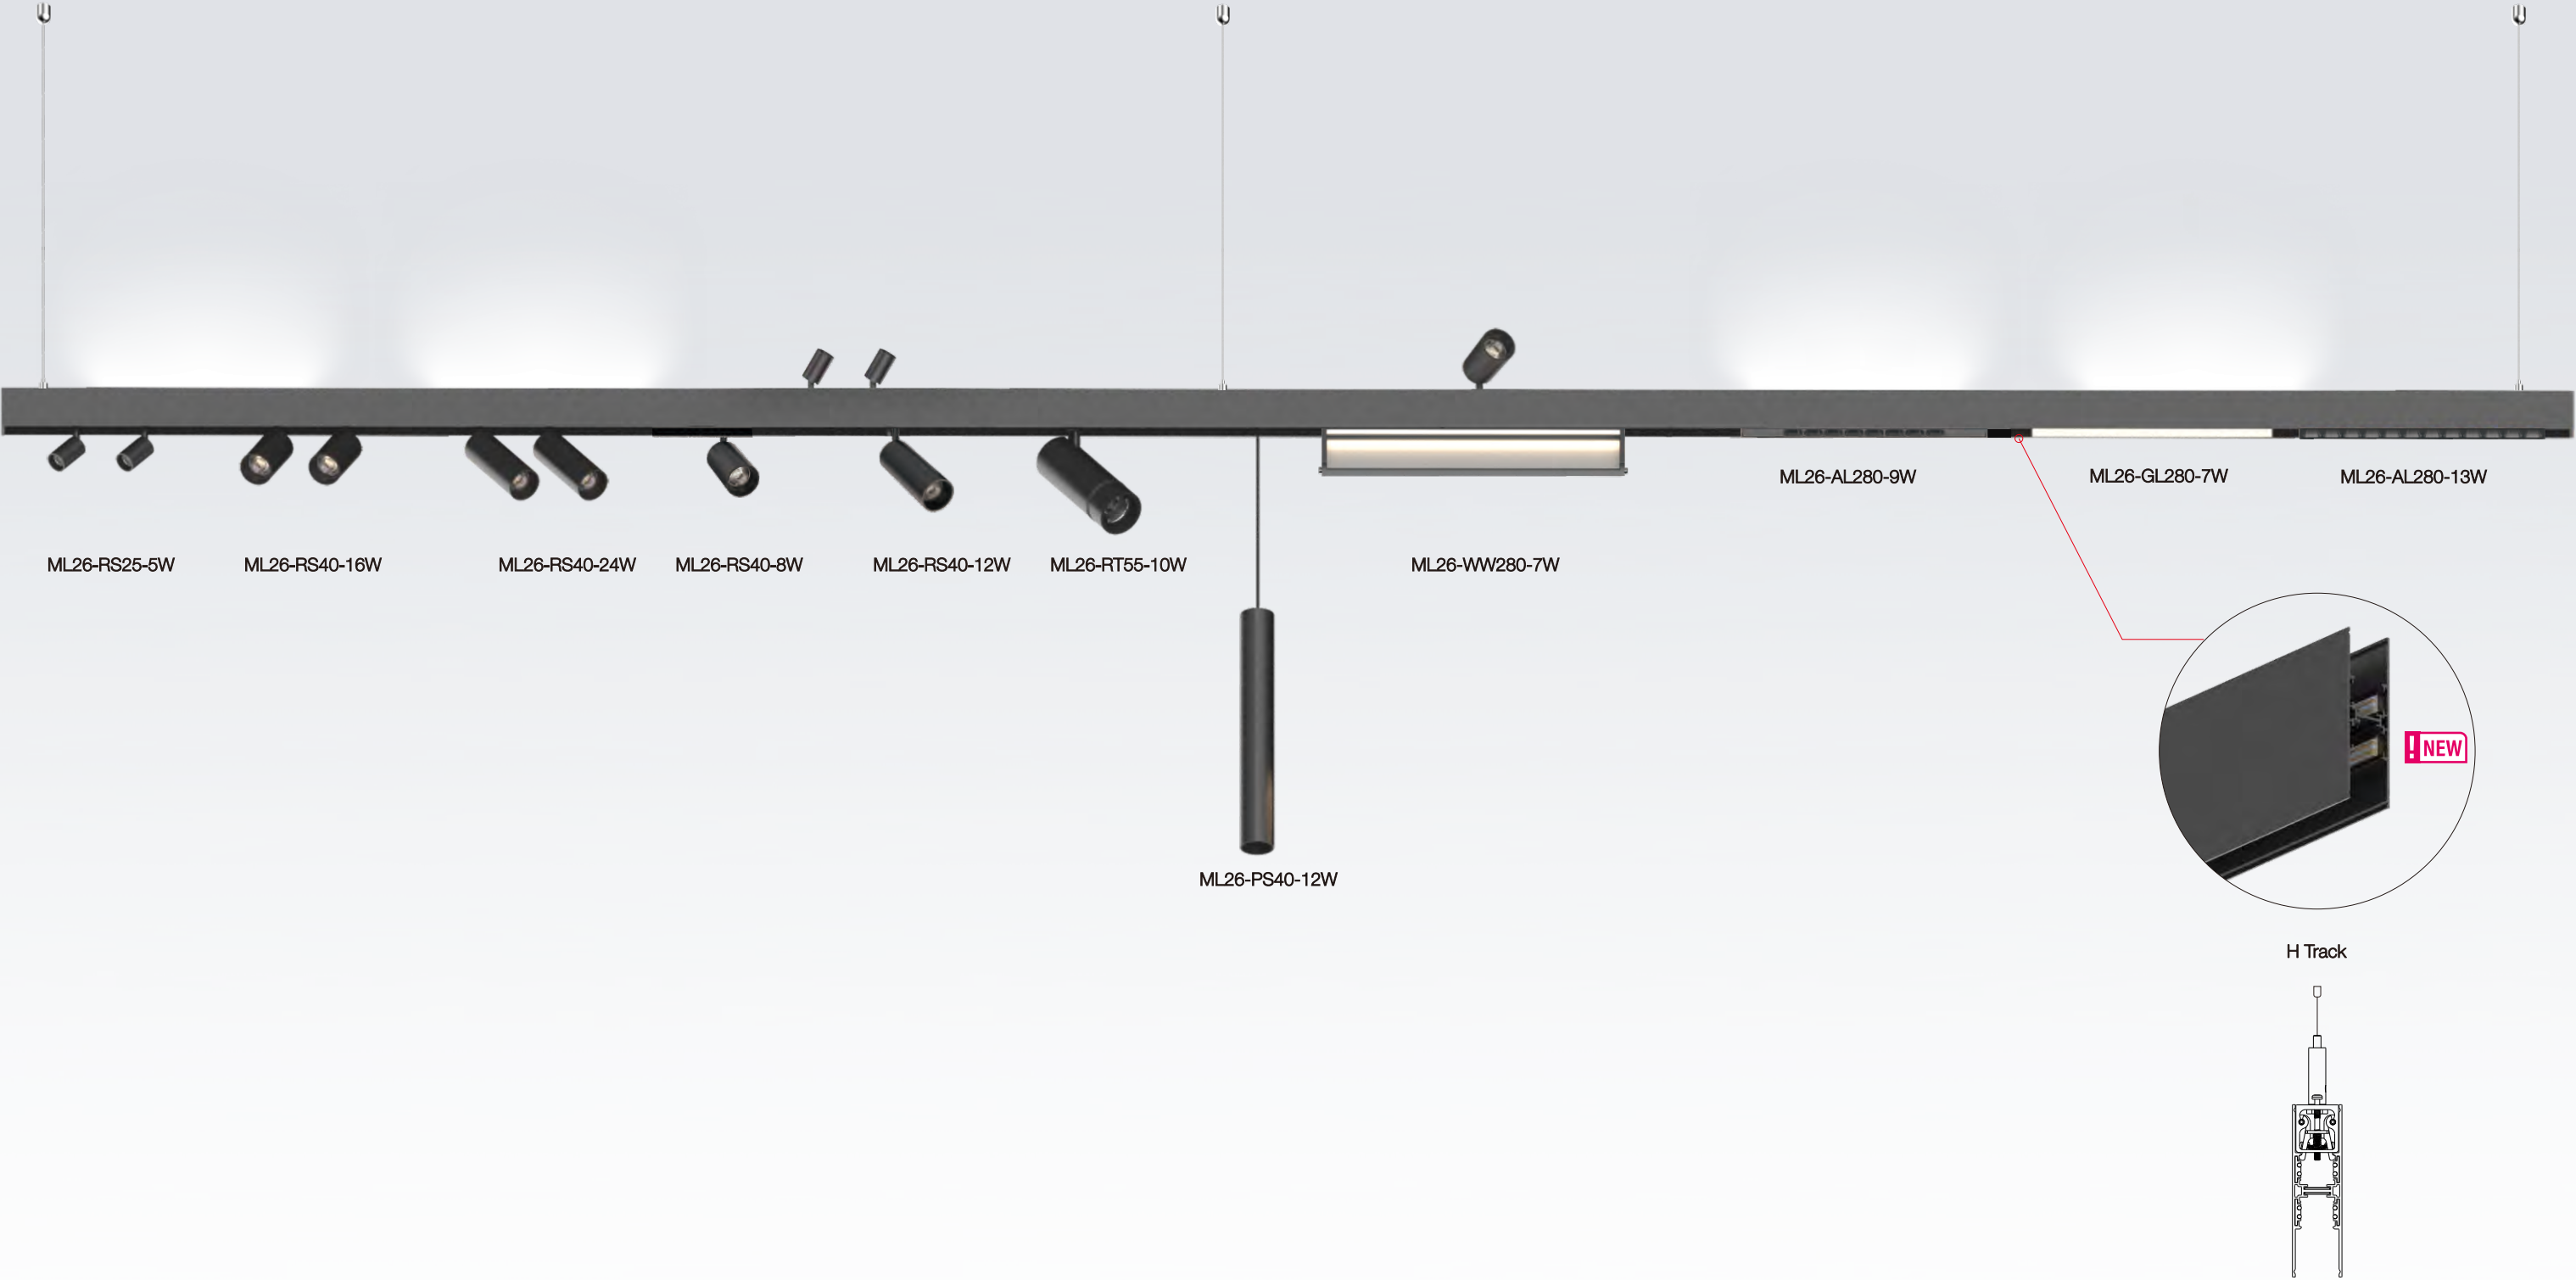

NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
Slim Track Configuration

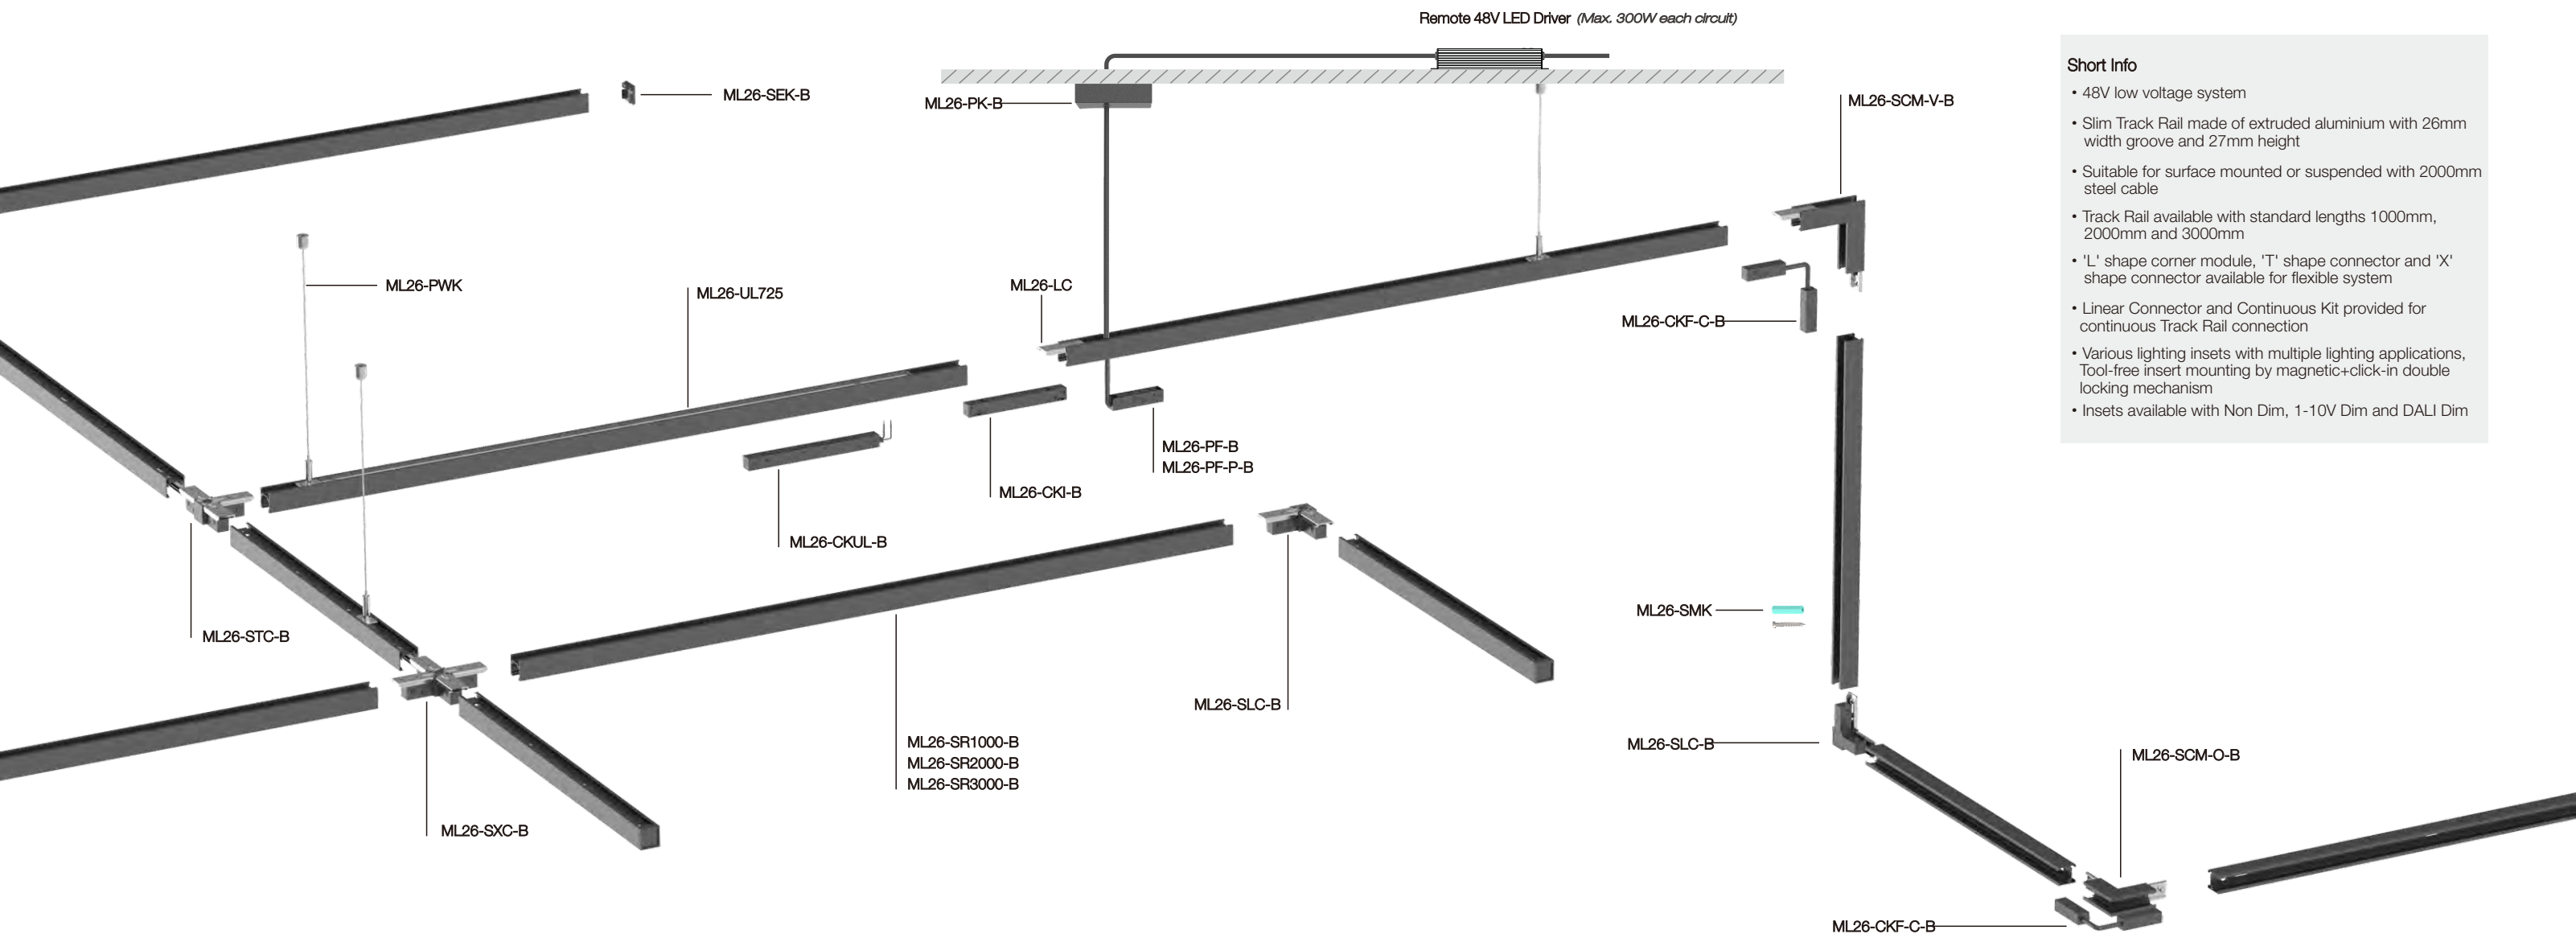

- Short Info**
- 48V low voltage system
 - Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
 - Suitable for surface mounted or suspended with 2000mm steel cable
 - Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
 - 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
 - Linear Connector and Continuous Kit provided for continuous Track Rail connection
 - Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
 - Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Slim Track System
Please order installation track rail, light insets and mounting accessories separately.

Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W

•Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK

•Continuous Kit needs to be used together with Linear Connector as a set.

Insets

Spotlight
● Page 263-268



Accent Light
● Page 269-270



General Light
● Page 271-272




Wall Wash Light
● Page 275-276



Pendant Spotlight
● Page 273-274



NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
Standard Track Configuration

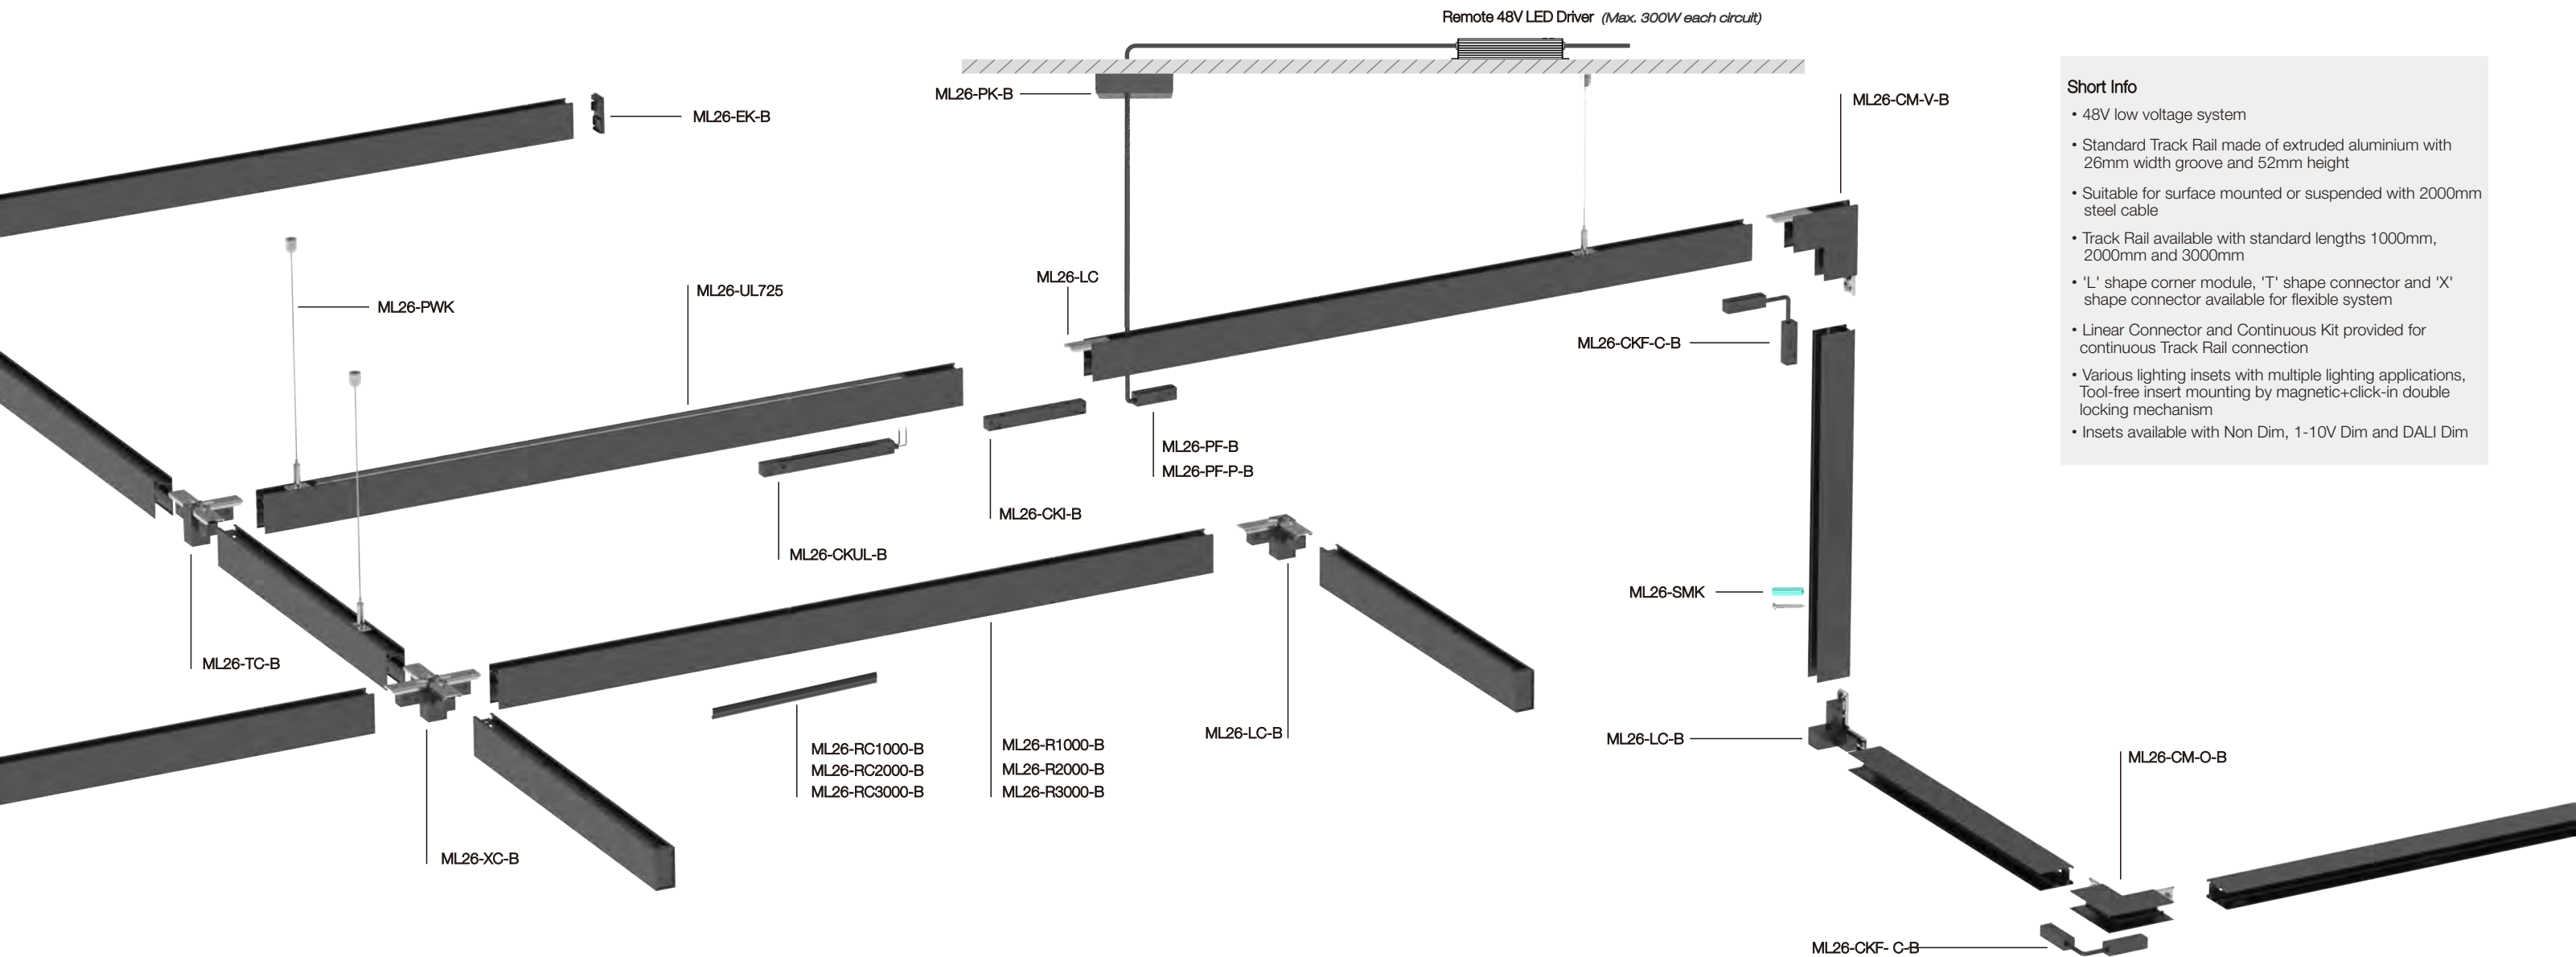


Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Standard Track System

Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W

•Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-LC-B	ML26-LC-W
'T' Shape Connector Set, 26 x 26mm	ML26-TK-B	ML26-TK-W
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W

•Continuous Kit needs to be used together with Linear Connector as a set.

Insets

Spotlight
● Page 263-268



Accent Light
● Page 269-270



General Light
● Page 271-272




Wall Wash Light
● Page 275-276



Pendant Spotlight
● Page 273-274



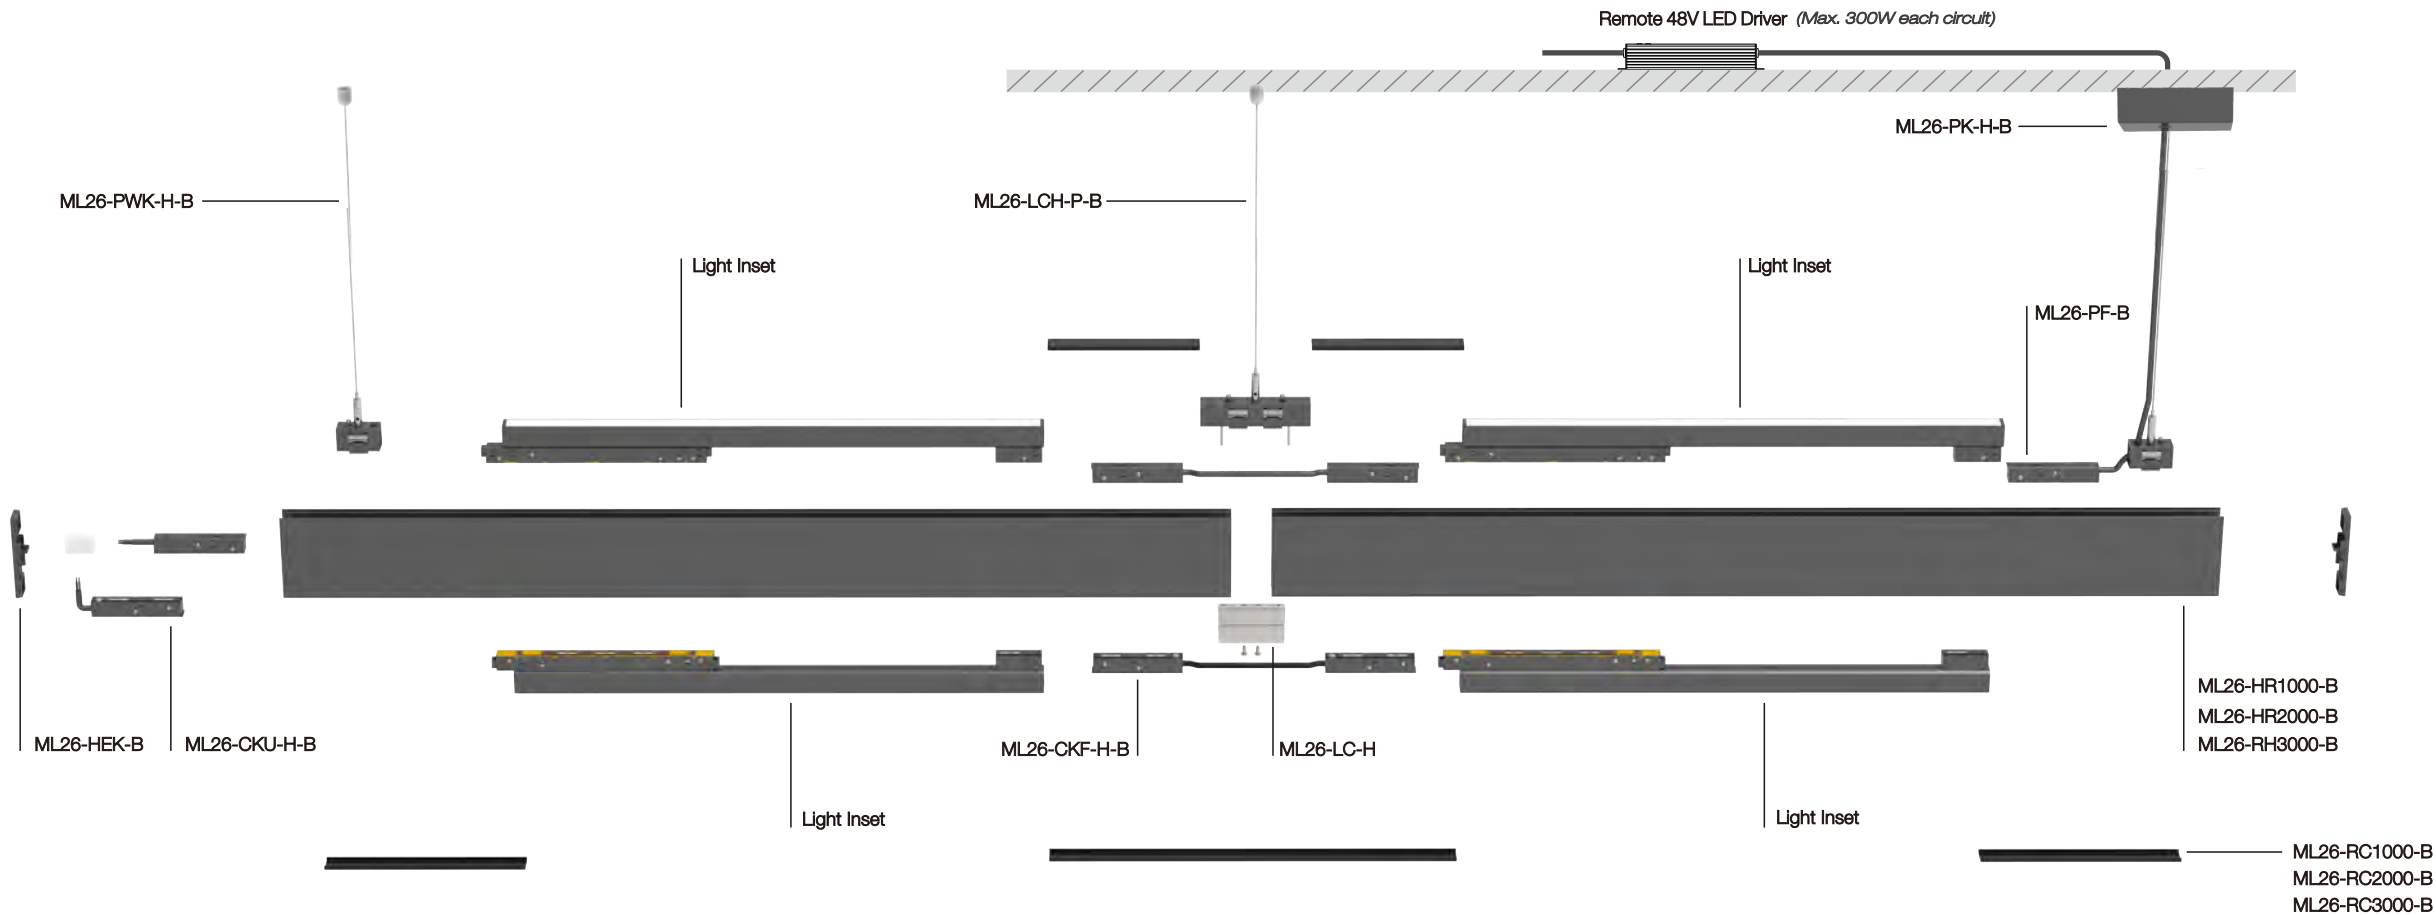


Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

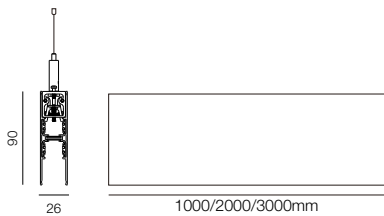

Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W

•Track Rail including endcaps.

Accessories of Slim Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W
Linear Connector Kit of H Track System•	ML26-LC-H	ML26-LC-H
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W

•Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

Insets

Spotlight
● Page 263-268



Accent Light
● Page 269-270



General Light
● Page 271-272



Wall Wash Light
● Page 275-276




Pendant Spotlight
● Page 273-274







Installation

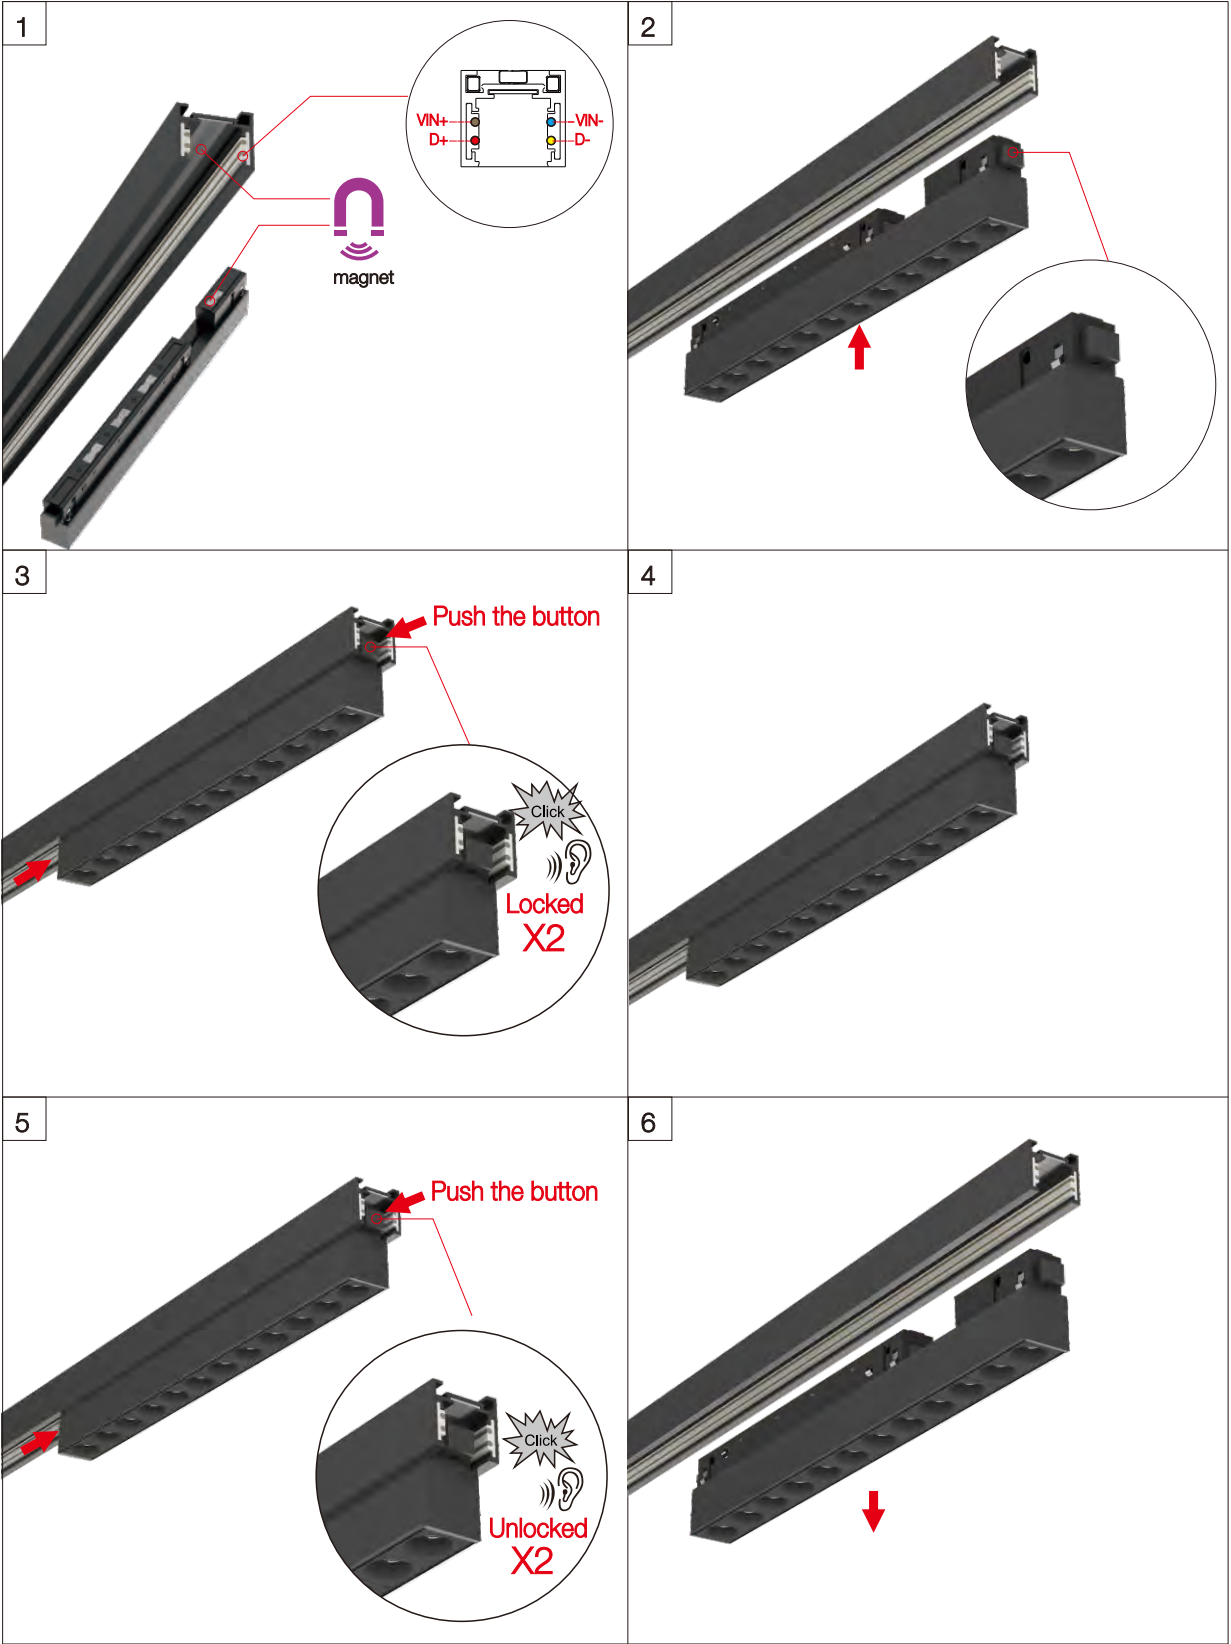


·Tool-free insert mounting by magnetic+click-in double locking mechanism

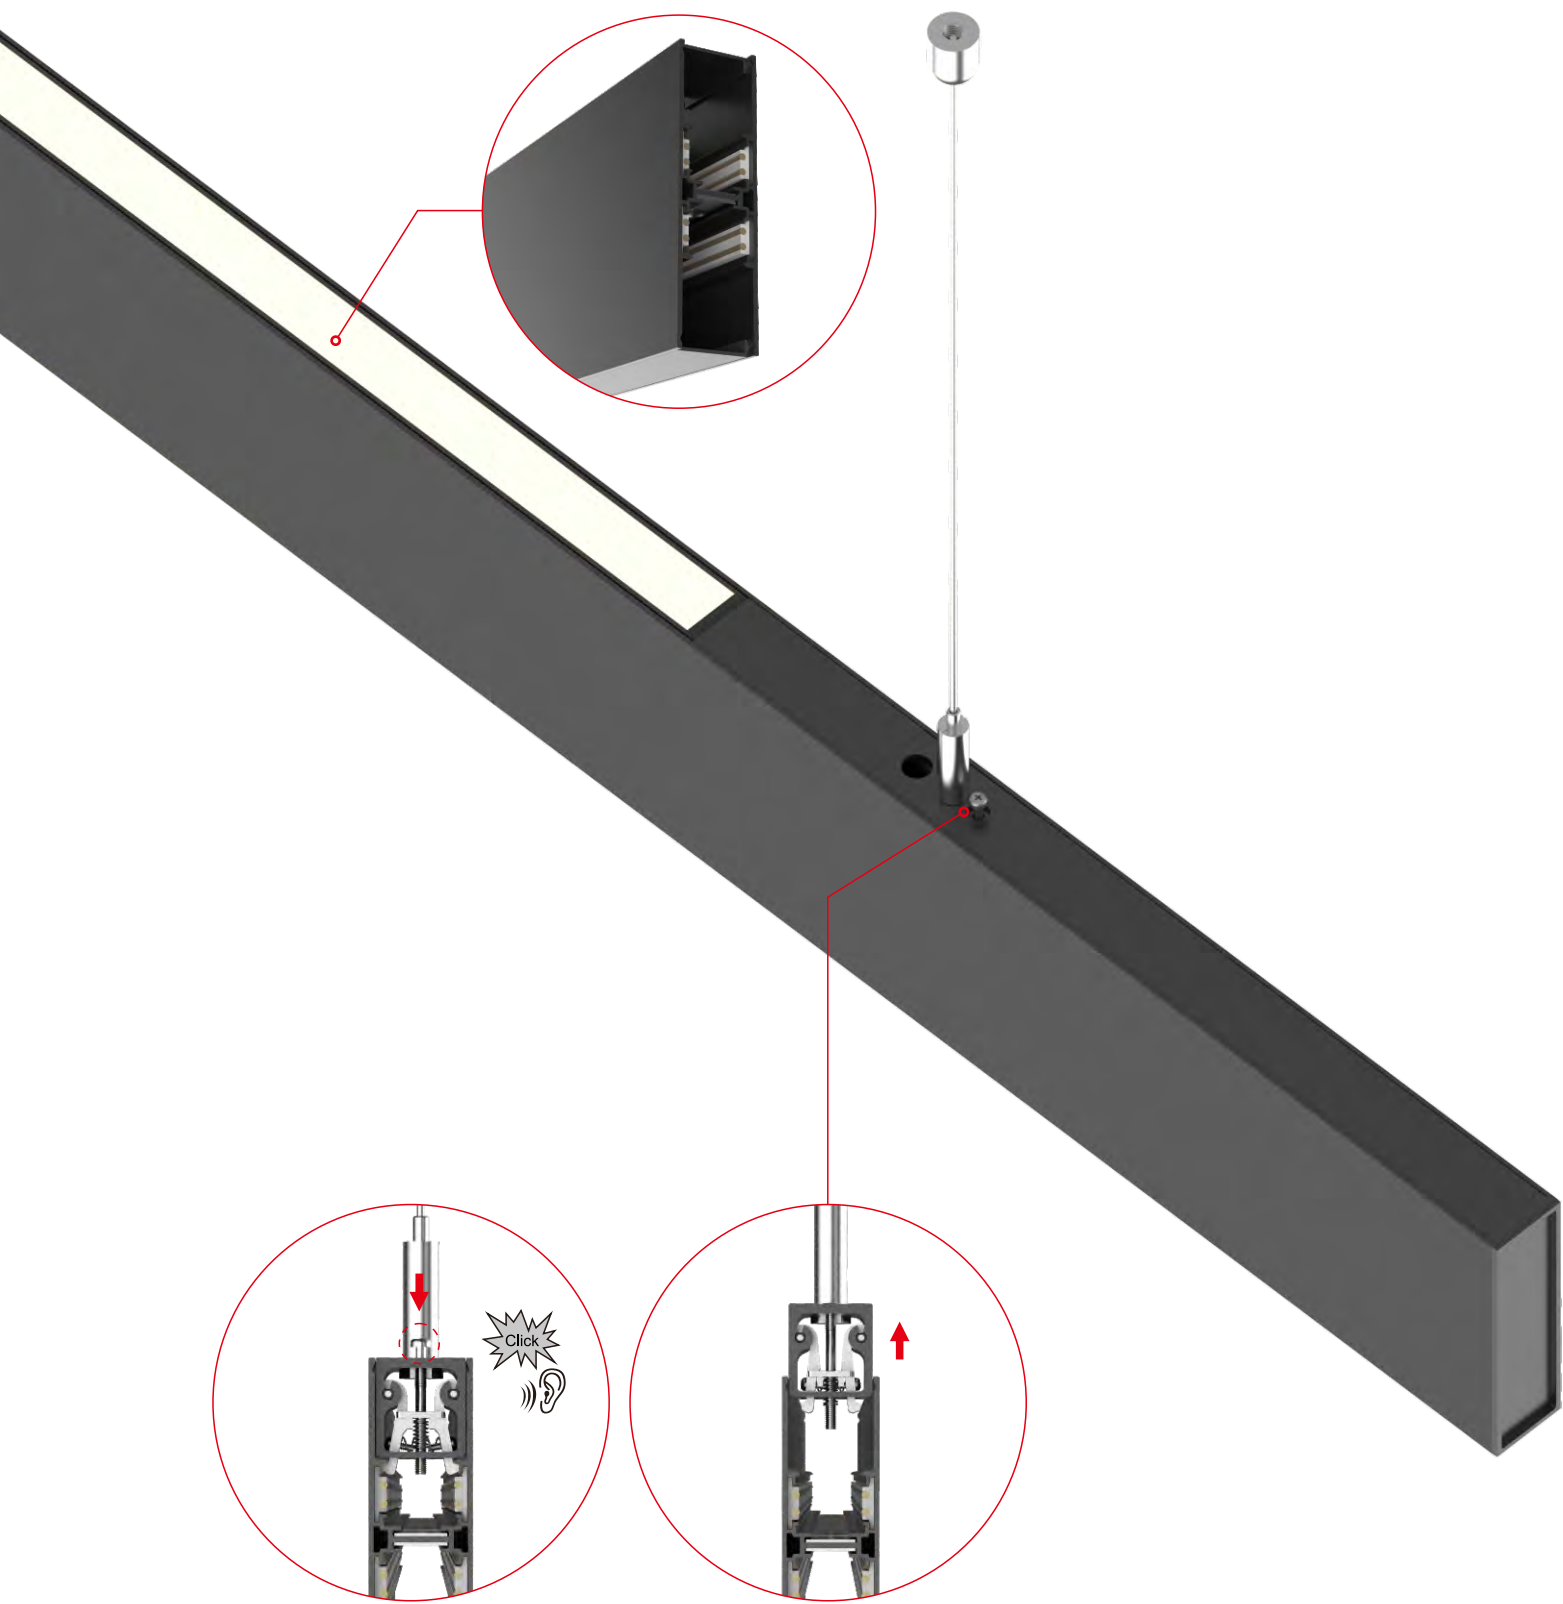

Installation

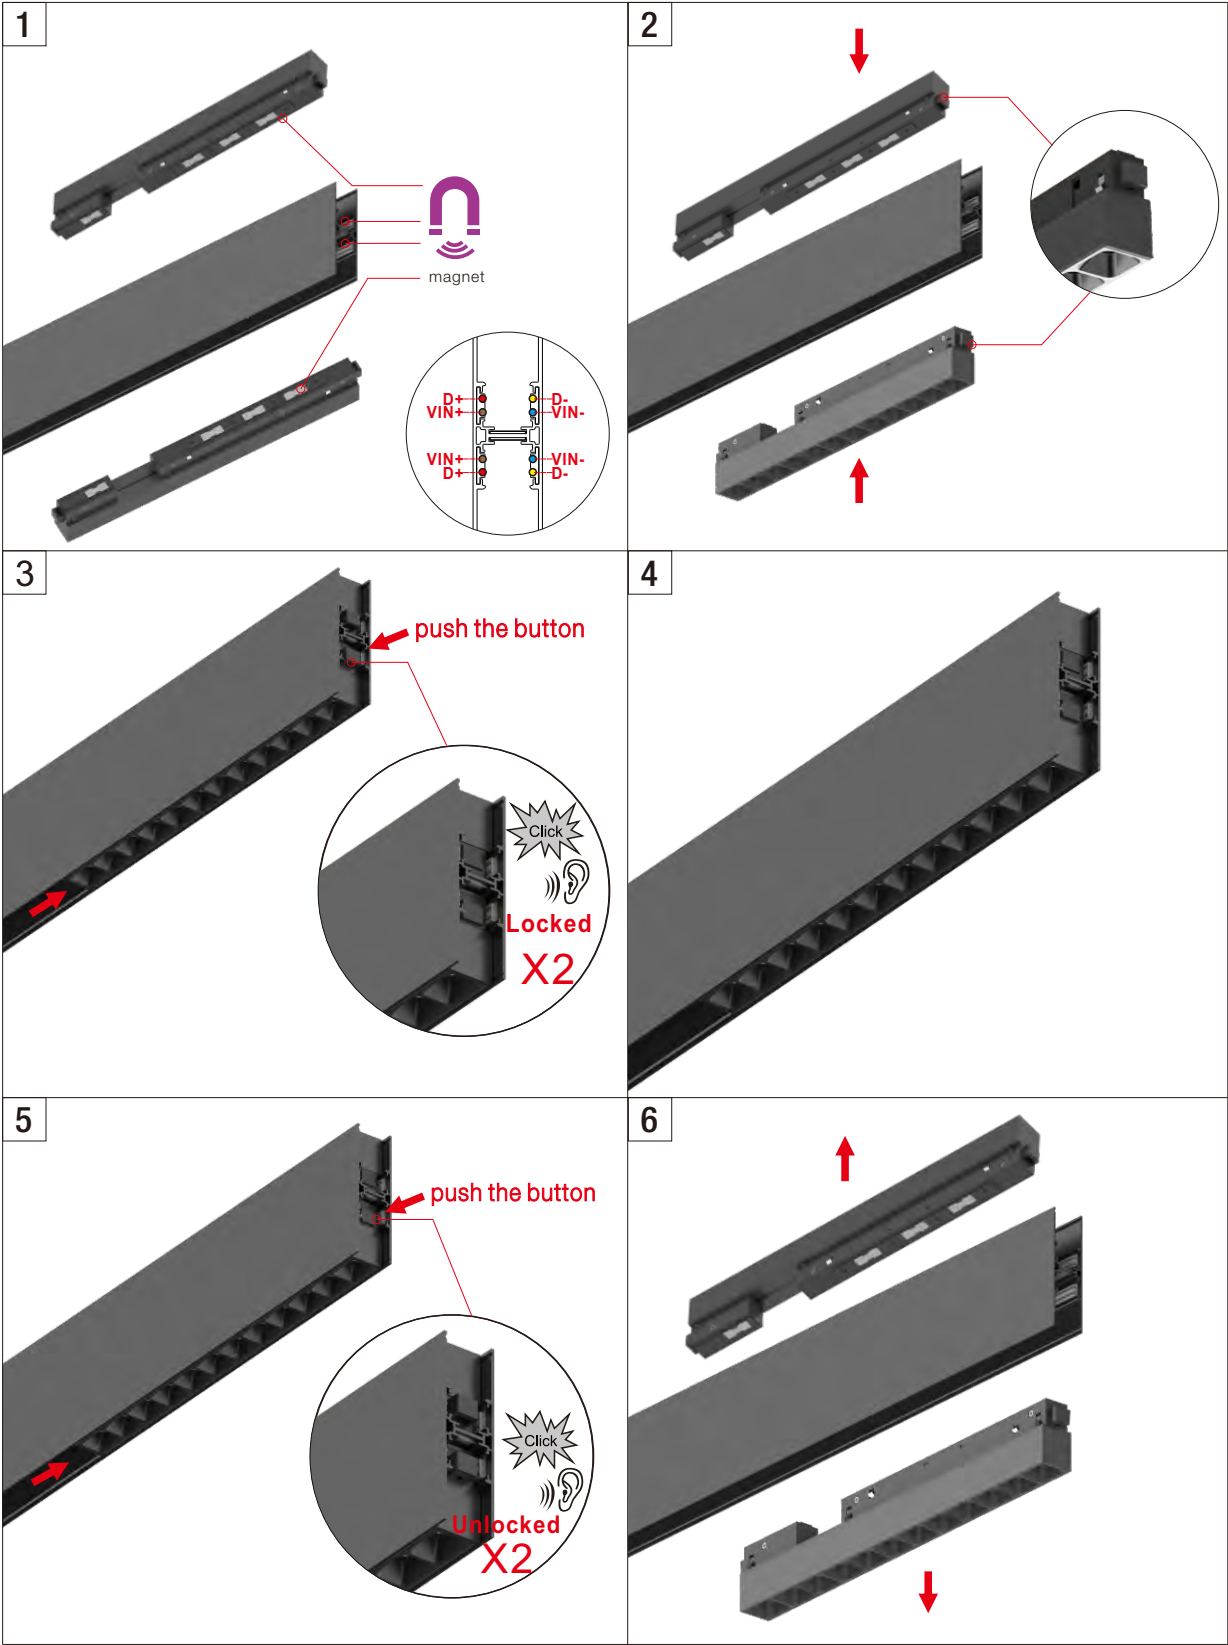



NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Trim Recessed Track System



Short Info




Moduline 26 Trim Recessed Track System

Electrical

- Non Dim
- 1-10V Dim
- DALI Dim

Fixture Colour

Black White(Optional)



Moduline 26 Trim Recessed Track System

Please order installation track rail, light insets and mounting accessories separately.

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
80x80	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W
80x80	Vertical 'L' shape corner module-Outter	ML26-FCM-O-B	ML26-FCM-O-W
80x80	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W
120x80	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W
120x120	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W

	Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
*For Corner Connection.			

	Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK
---	--	----------	----------

	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W
---	---	------------	------------

	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
---	--	-----------	-----------

	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.			

	Linear Connector with screws	ML26-LC	ML26-LC
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W

*Continuous Kit needs to be used together with Linear Connector as a set.


Short Info

- 48V low voltage system
- Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
- Mounted from inner track , suitable for all thickness ceiling heights
- Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

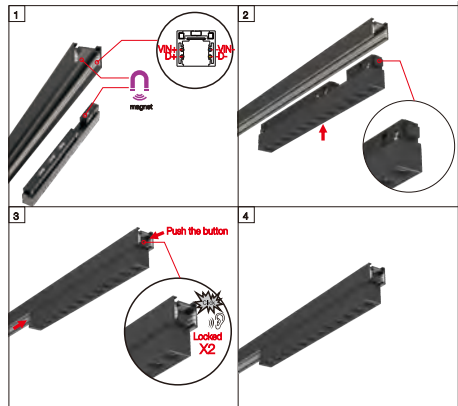

·Magnetic+click-in double locking mechanism

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI

Easy Installation




Short Info

- 48V low voltage system
- Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
- Mounted from surface, suitable for all thickness ceiling heights
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

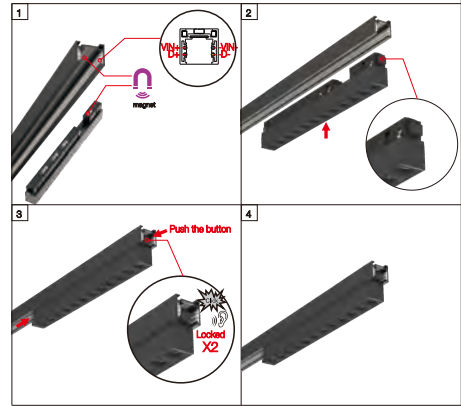

·Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Easy Installation Version

Electrical



Non Dim

1-10V Dim

DALI Dim

Fixture Colour

Black White(Optional)



Moduline 26 Trimless Recessed Track System
Easy Installation Version

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML26-FR1000-EI-B	ML26-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML26-FR2000-EI-B	ML26-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML26-FR3000-EI-B	ML26-TR3000-EI-W

*Track Rail including endcaps.

Accessories of Slim Track System

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
100x100	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W
100x100	Vertical 'L' shape corner module-Outter	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W
100x100	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W
100x120	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W
120x120	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W

	Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
*For Corner Connection.			

	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TEK-EI-B	ML26-TEK-EI-W
---	---	---------------	---------------

	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
---	--	-----------	-----------

	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.			

	Linear Connector with screws	ML26-LC	ML26-LC
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
*Continuous Kit needs to be used together with Linear Connector as a set.			


	Trimless Recessed Track mounting kit 1set for 1000mm track	ML26-RMK	ML26-RMK
---	---	----------	----------

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-Ceiling Thickness Adjustable

NEW

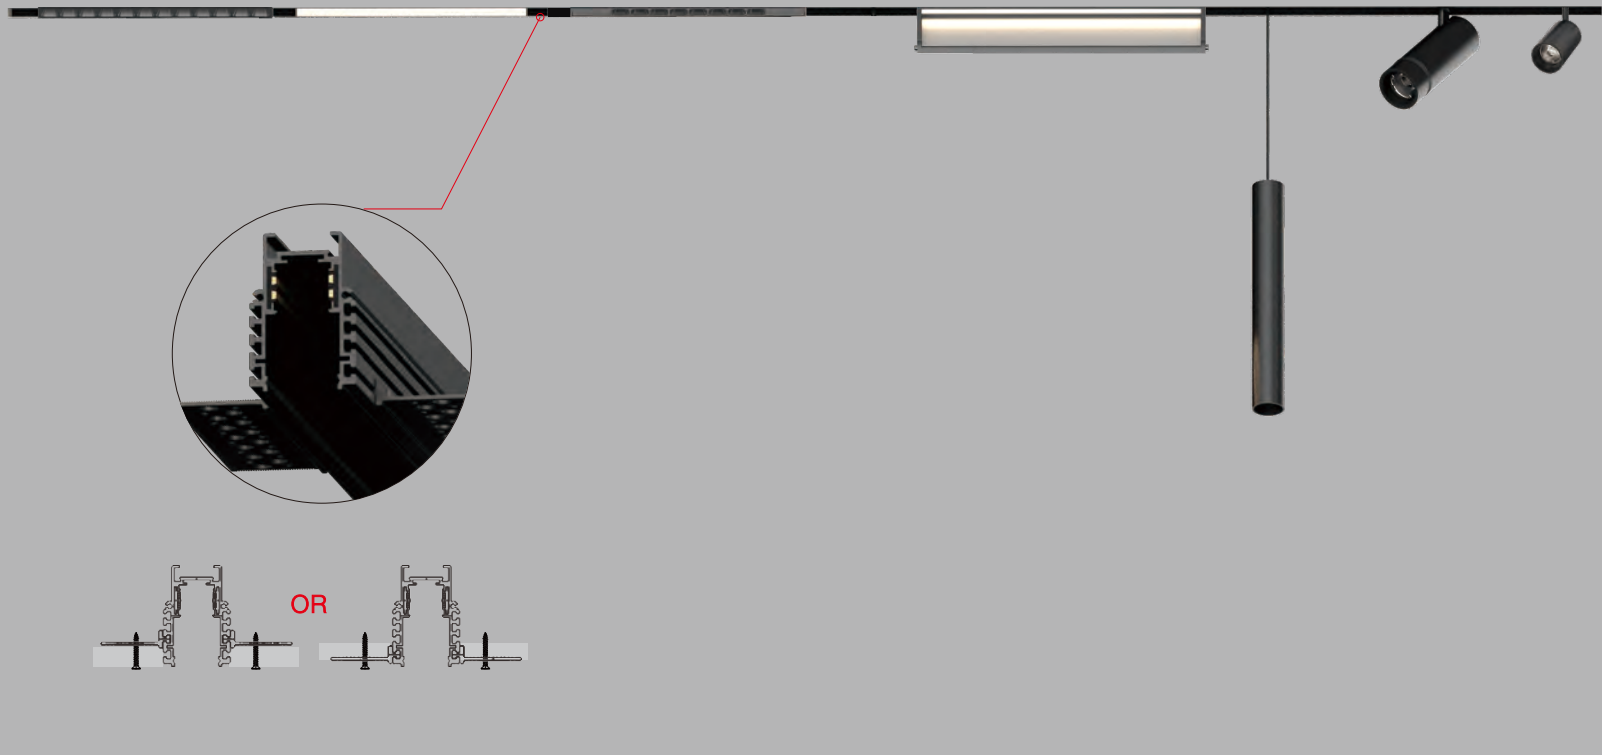


Short Info

- 48V low voltage system
- Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
- Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets




Features

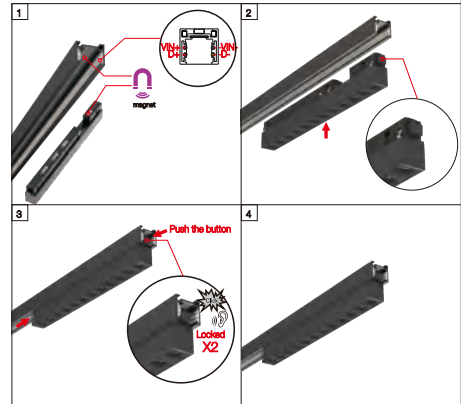

·Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

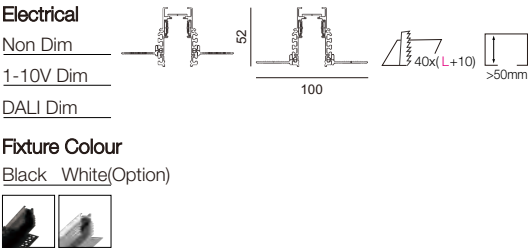

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
80x80	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W
80x80	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W
80x80	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W
80x120	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W
120x120	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W

	Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
*For Corner Connection.			
	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TAEK-B	ML26-TAEK-W
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.			
	Linear Connector with screws	ML26-LC	ML26-LC
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
*Continuous Kit needs to be used together with Linear Connector as a set.			
	Trimless Recessed installation kit	ML26-TAIK	ML26-TAIK
	1set for 1000mm track	ML26-TAIK	ML26-TAIK

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS25-3W
Single Spot



ML26-RS25-5W
Double Spot



ML26-RS40-3W



ML26-RS25-5W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	2W	48 V	90	2700K	18°	220lm	170lm	MLR1-9271803F-BB
					30°	220lm	170lm	MLR1-9273003F-BB
					45°	220lm	170lm	MLR1-9274503F-BB
				3000K	18°	230lm	180lm	MLR1-9301803F-BB
					30°	230lm	180lm	MLR1-9303003F-BB
					45°	230lm	180lm	MLR1-9304503F-BB
				4000K	18°	250lm	190lm	MLR1-9401803F-BB
					30°	250lm	190lm	MLR1-9403003F-BB
					45°	250lm	190lm	MLR1-9404503F-BB
Quick Supply: in Black, CRI90 3000K 30° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
4W	5W	48 V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB
Quick Supply: in Black, CRI90 3000K 30° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional



Gold



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS40-8W
Single Spot



ML26-RS40-16W
Double Spot



ML26-RS40-8W



ML26-RS40-16W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48 V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB
					30°	700lm	550lm	MLR2-9273008F-BB
					45°	700lm	400lm	MLR2-9274508F-BB
				3000K	18°	750lm	580lm	MLR2-9301808F-BB
					30°	750lm	580lm	MLR2-9303008F-BB
					45°	750lm	420lm	MLR2-9304508F-BB
				4000K	18°	800lm	640lm	MLR2-9401808F-BB
					30°	800lm	640lm	MLR2-9403008F-BB
					45°	800lm	460lm	MLR2-9404508F-BB
Quick Supply: in Black, CRI90 3000K 30° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
15W	16W	48 V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
					30°	1400lm	1000lm	MLR3-9273016F-BB
					45°	1400lm	800lm	MLR3-9274516F-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816F-BB
					30°	1500lm	1100lm	MLR3-9303016F-BB
					45°	1500lm	850lm	MLR3-9304516F-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816F-BB
					30°	1600lm	1200lm	MLR3-9403016F-BB
					45°	1600lm	900lm	MLR3-9404516F-BB
Quick Supply: in Black, CRI90 3000K 30° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional



Gold



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot





ML26-RS40-12W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLR4-9271812F-BB	
					30°	1000lm	700lm	MLR4-9273012F-BB	
					45°	1000lm	550lm	MLR4-9274512F-BB	
				3000K	18°	1100lm	750lm	MLR4-9301812F-BB	
					30°	1100lm	750lm	MLR4-9303012F-BB	
					45°	1100lm	600lm	MLR4-9304512F-BB	
				4000K	18°	1200lm	800lm	MLR4-9401812F-BB	
					30°	1200lm	800lm	MLR4-9403012F-BB	
					45°	1200lm	650lm	MLR4-9404512F-BB	

Quick Supply: in Black, CRI90 3000K 30°

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)




ML26-RS40-24W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	48 V	90	2700K	18°	2000lm	1400lm	MLR5-9271824F-BB	
					30°	2000lm	1400lm	MLR5-9273024F-BB	
					45°	2000lm	1100lm	MLR5-9274524F-BB	
				3000K	18°	2200lm	1500lm	MLR5-9301824F-BB	
					30°	2200lm	1500lm	MLR5-9303024F-BB	
					45°	2200lm	1200lm	MLR5-9304524F-BB	
				4000K	18°	2400lm	1600lm	MLR5-9401824F-BB	
					30°	2400lm	1600lm	MLR5-9403024F-BB	
					45°	2400lm	1300lm	MLR5-9404524F-BB	

Quick Supply: in Black, CRI90 3000K 30°

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RT55-10W
Zooming Spot





ML26-RT55-10W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code		
9W	10W	48 V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410F-BB			
					35°-60°	1200lm	950lm	MLR6-927Z610F-BB			
					3000K	20°-40°	1300lm	1100lm	MLR6-930Z410F-BB		
						35°-60°	1300lm	1000lm	MLR6-930Z610F-BB		
						4000K	20°-40°	1400lm	1200lm	MLR6-940Z410F-BB	
							35°-60°	1400lm	1100lm	MLR6-940Z610F-BB	

Quick Supply: in Black, CRI90 3000K 20°-40°

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



NEW




ML26-RS72-19W
ML26-RS72-26W
Single Spot

19W
26W

CRI90

2700K
3000K
4000K




CITIZEN
50,000h@L80B10

UGR
< 19

IP20



CB



ML26-RS72-19W
ML26-RS72-26W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48 V	90	2700K	20°	1800lm	1500lm	MLR7-9272019F-BB
					35°	1800lm	1600lm	MLR7-9273519F-BB
					55°	1800lm	1600lm	MLR7-9275519F-BB
				3000K	20°	1900lm	1600lm	MLR7-9302019F-BB
					35°	1900lm	1700lm	MLR7-9303519F-BB
					55°	1900lm	1700lm	MLR7-9305519F-BB
				4000K	20°	2100lm	1700lm	MLR7-9402019F-BB
					35°	2100lm	1800lm	MLR7-9403519F-BB
					55°	2100lm	1800lm	MLR7-9405519F-BB
25W	26W	48 V	90	2700K	20°	2500lm	2100lm	MLR7-9272026F-BB
					35°	2500lm	2300lm	MLR7-9273526F-BB
					55°	2500lm	2300lm	MLR7-9275526F-BB
				3000K	20°	2700lm	2200lm	MLR7-9302026F-BB
					35°	2700lm	2400lm	MLR7-9303526F-BB
					55°	2700lm	2400lm	MLR7-9305526F-BB
				4000K	20°	2900lm	2400lm	MLR7-9402026F-BB
					35°	2900lm	2600lm	MLR7-9403526F-BB
					55°	2900lm	2600lm	MLR7-9405526F-BB

Quick Supply: in Black, 26W CRI90 3000K 35°

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White



NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
Accent Light Inset



ML26-AL190-3W



ML26-AL190-7W



ML26-AL280-9W




ML26-AL280-13W

NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
Adjustable Accent Light Inset



ML26-SA280-13W
Adjustable Accent Light Inset



ML26-AL190-3W



ML26-AL190-7W



ML26-AL280-9W



ML26-AL280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
				35°	230lm	170lm		MLA3-9273503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
				35°	250lm	180lm		MLA3-9303503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
				35°	270lm	200lm		MLA3-9403503F-BB
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
6W	7W	48 V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
				35°	700lm	500lm		MLA4-9273507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
				35°	750lm	550lm		MLA4-9303507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
				35°	820lm	600lm		MLA4-9403507F-BB
Quick Supply: in Black, CRI90 3000K 35° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
8W	9W	48 V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
				35°	950lm	700lm		MLA1-9273509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
				35°	1000lm	750lm		MLA1-9303509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
				35°	1100lm	800lm		MLA1-9403509F-BB
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
				35°	1400lm	1000lm		MLA2-9273513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
				35°	1500lm	1100lm		MLA2-9303513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
				35°	1600lm	1200lm		MLA2-9403513F-BB
Quick Supply: in Black, CRI90 3000K 35° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional



White



ML26-SA280-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
				35°	1400lm	1000lm		MLA5-9273513F-BB
				3000K	20°	1500lm	1100lm	MLA5-9302013F-BB
				35°	1500lm	1100lm		MLA5-9303513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013F-BB
				35°	1600lm	1200lm		MLA5-9403513F-BB
Quick Supply: in Black, CRI90 3000K 35° Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
General Light Inset




Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include ML26-GL280-7W, ML26-GL560-13W, ML26-GL840-19W, and ML26-GL1120-26W with various specifications.

Optional



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Adjustable General Light Inset



Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include ML26-SG280-7W with specifications.



ML26-SG280-7W

Optional




White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS40-12W

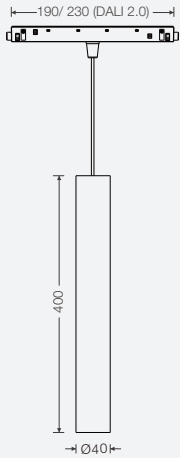

12W

CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR < 19

IP20

CB

CE

Intertek

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
	11W	12W	48 V	90	2700K	18°	1000lm	700lm	MLP1-9271812F-BB
						30°	1000lm	700lm	MLP1-9273012F-BB
						45°	1000lm	550lm	MLP1-9274512F-BB
					3000K	18°	1100lm	750lm	MLP1-9301812F-BB
						30°	1100lm	750lm	MLP1-9303012F-BB
						45°	1100lm	600lm	MLP1-9304512F-BB
					4000K	18°	1200lm	800lm	MLP1-9401812F-BB
						30°	1200lm	800lm	MLP1-9403012F-BB
						45°	1200lm	650lm	MLP1-9404512F-BB
					Quick Supply: in Black, CRI90 3000K 30°				
					Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)				

ML26-PS40-12W

Optional



Gold




White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS55-14W

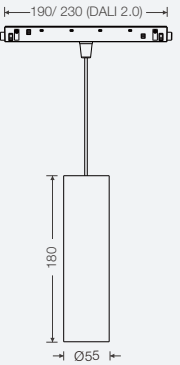

14W

CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR < 19

IP20

CB

CE

Intertek

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
	13W	14W	48 V	90	2700K	18°	1100lm	900lm	MLP2-9271814F-BB
						24°	1100lm	900lm	MLP2-9272414F-BB
						36°	1100lm	750lm	MLP2-9273614F-BB
					3000K	18°	1200lm	950lm	MLP2-9301814F-BB
						24°	1200lm	950lm	MLP2-9302414F-BB
						36°	1200lm	800lm	MLP2-9303612F-BB
					4000K	18°	1300lm	1000lm	MLP2-9401814F-BB
						24°	1300lm	1000lm	MLP2-9402414F-BB
						36°	1300lm	850lm	MLP2-9403614F-BB
					Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)				

ML26-PS55-14W

Optional



White


NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Wall Washer Inset



ML26-WW280-7W



ML26-WW560-13W



ML26-WW280-7W




ML26-WW560-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	Wall Washer	550lm	330lm	MLW1-927A107F-BM
				3000K	Wall Washer	600lm	350lm	MLW1-930A107F-BM
				4000K	Wall Washer	650lm	400lm	MLW1-940A107F-BM
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
12W	13W	48 V	90	2700K	Wall Washer	1100lm	670lm	MLW2-927A113F-BM
				3000K	Wall Washer	1200lm	700lm	MLW2-930A113F-BM
				4000K	Wall Washer	1300lm	750lm	MLW2-940A113F-BM
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional




White

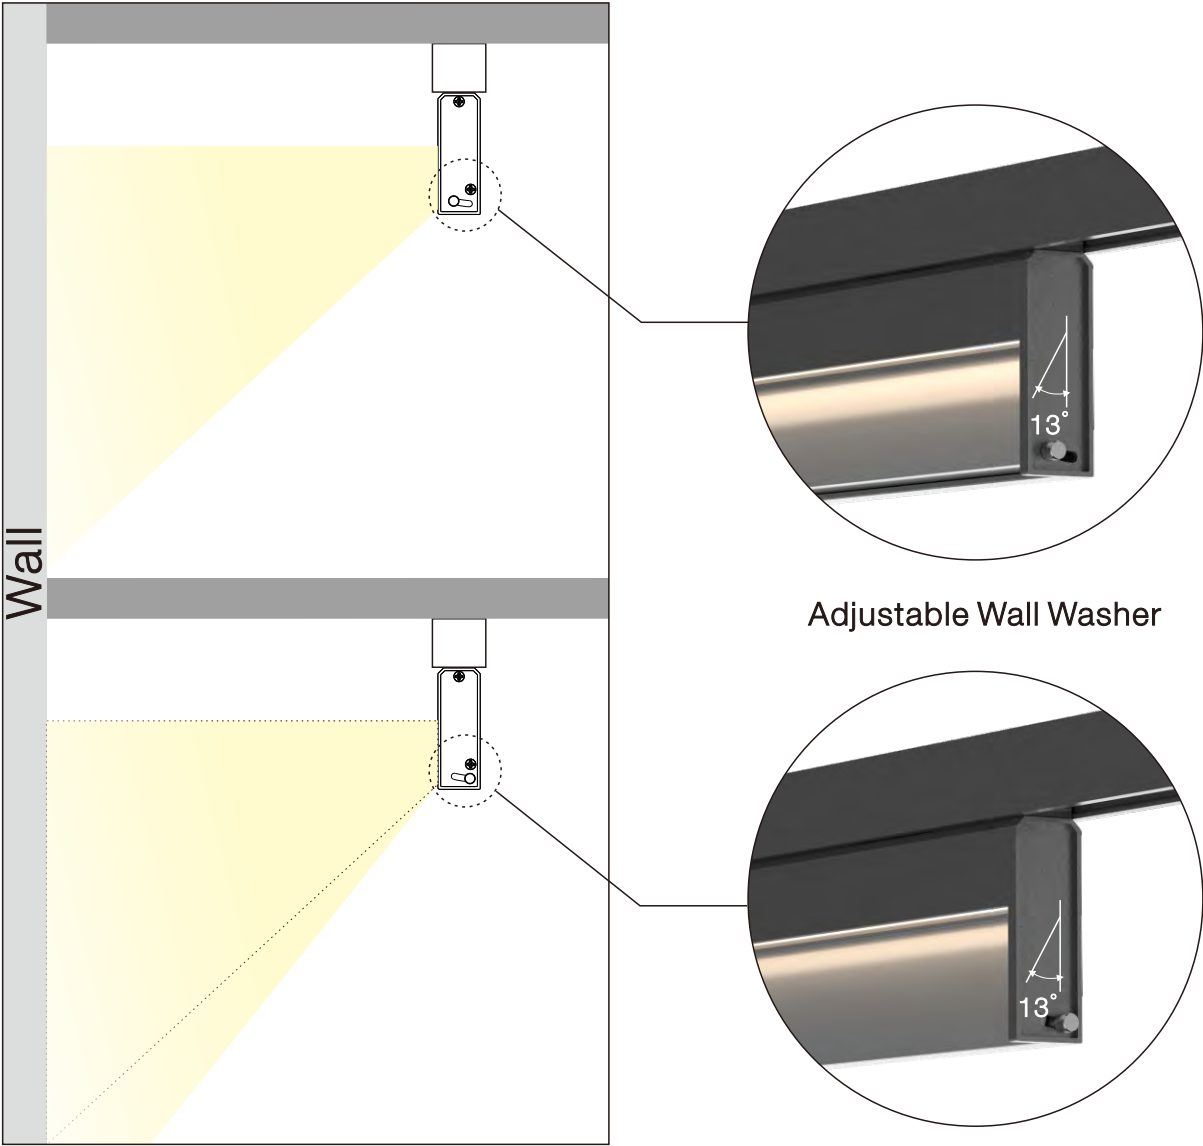




Microprismatic Cover
UGR<19

NEKO / **GAME & SUGAR**
Ceiling Light System
Modular Design

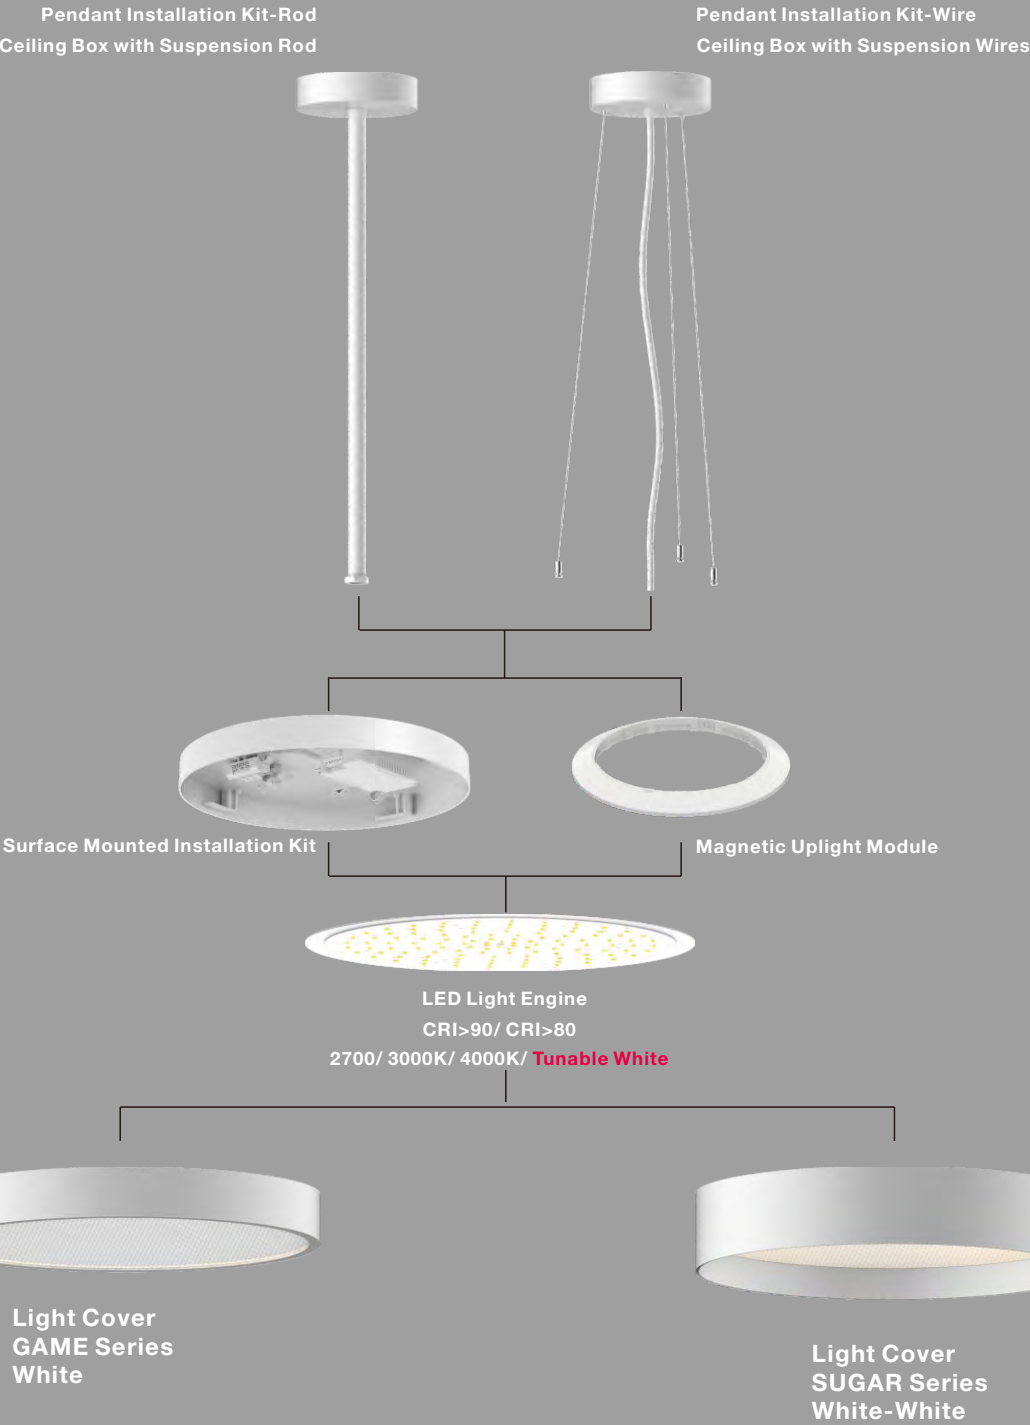

Installation :

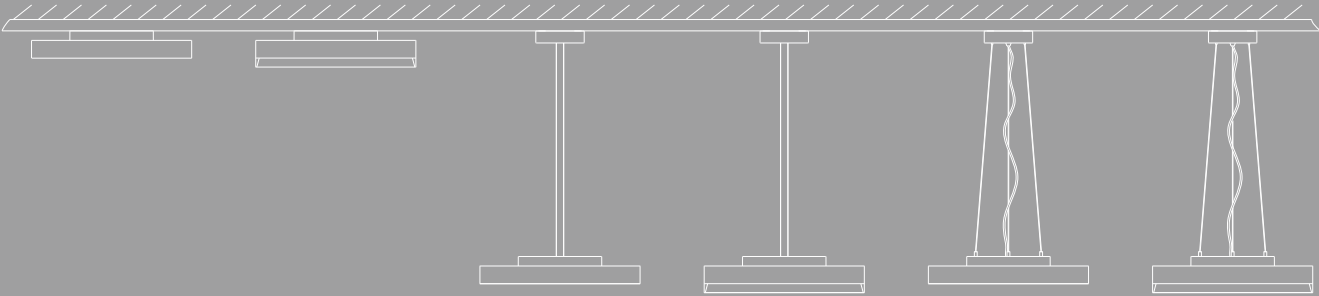


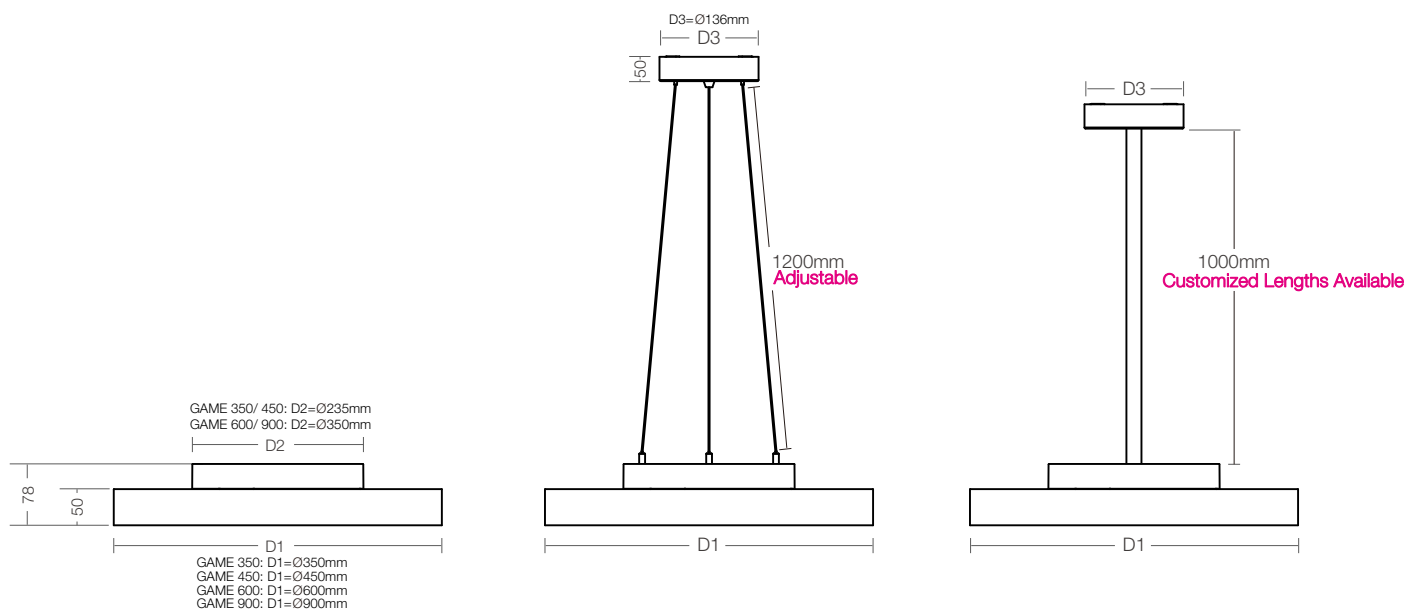


8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
18W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim



11W Up Light(350mA) 1100lm
18W Down Light(500mA) 2000lm
25W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim

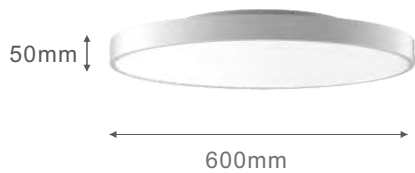

18W Up Light(500mA) 1700lm
25W Down Light(700mA) 2800lm
38W Down Light(1050mA) 4700lm
ON-OFF/Phase Dim/1-10V/DALI Dim

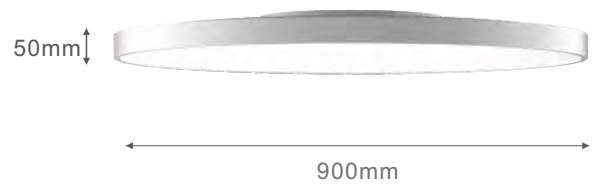

25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim



Magnetic Uplight Module



(GAME 350 for Reference)

(GAME 450 for Reference)


NEKO / SUGAR
Ceiling Light System

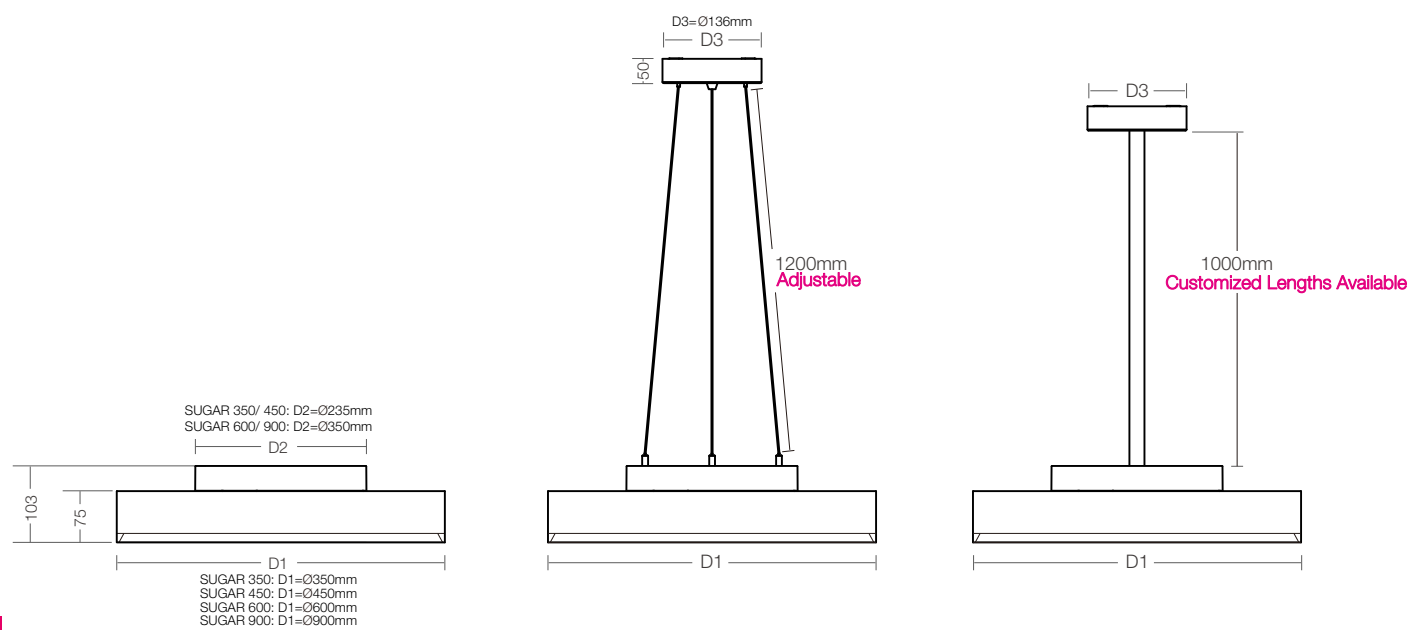

8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
18W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim



11W Up Light(350mA) 1100lm
18W Down Light(500mA) 2000lm
25W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim

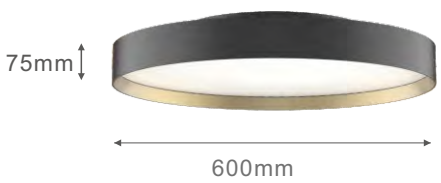

18W Up Light(500mA) 1700lm
25W Down Light(700mA) 2800lm
38W Down Light(1050mA) 4700lm
ON-OFF/Phase Dim/1-10V/DALI Dim



25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim

Magnetic Uplight Module




(SUGAR 350 for Reference)


(SUGAR 450 for Reference)



NEKO / GAME350
Ceiling Light System

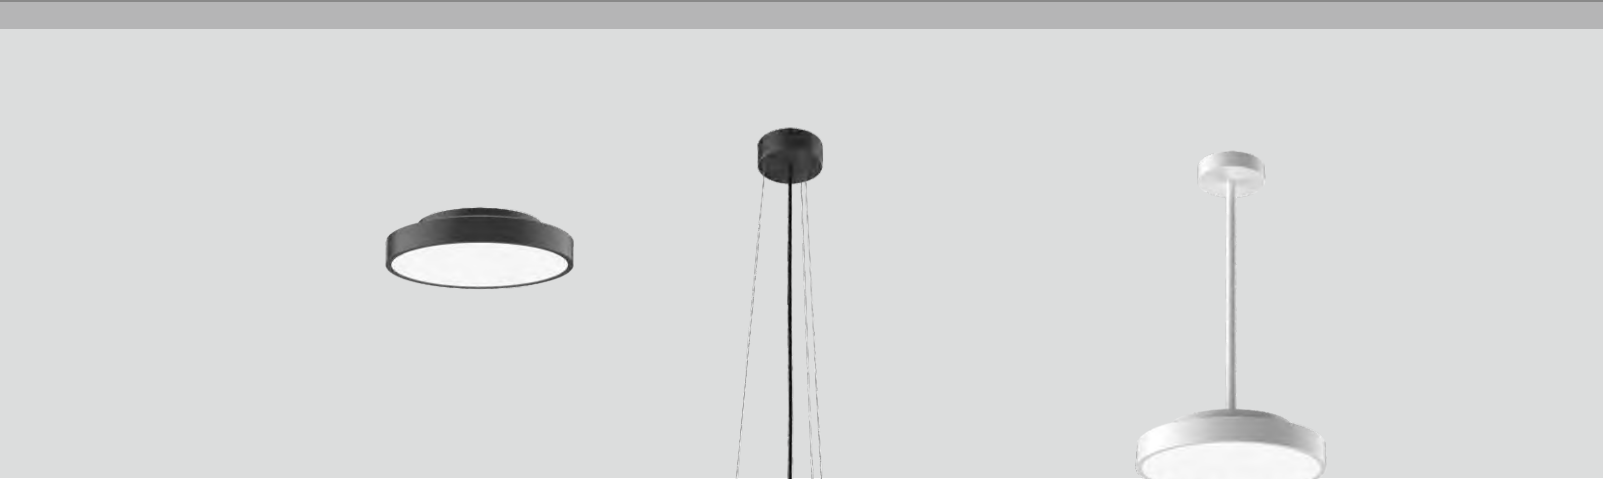

12W 18W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available	 90°	OSRAM 50,000h@L80B10	UGR < 19	IP 40	 5 GUARANTEED	CB	CE	
------------	----------------	-------------------------	----------------------------	---	--------------------------------	--------------------	--------------	---	-----------	-----------	---




	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-BN	
						3000K	90°	1900lm	1400lm	GASM-8309012N-BN	
						4000K	90°	2000lm	1500lm	GASM-8409012N-BN	
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279018N-BN	
						3000K	90°	2600lm	2000lm	GASM-8309018N-BN	
						4000K	90°	2800lm	2200lm	GASM-8409018N-BN	


 White	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-WN	
						3000K	90°	1900lm	1400lm	GASM-8309012N-WN	
						4000K	90°	2000lm	1500lm	GASM-8409012N-WN	
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279018N-WN	
						3000K	90°	2600lm	2000lm	GASM-8309018N-WN	
						4000K	90°	2800lm	2200lm	GASM-8409018N-WN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)											

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPW-8279012N-BN
							90°	1900lm	1400lm	GAPW-8309012N-BN
							90°	2000lm	1500lm	GAPW-8409012N-BN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPW-8279018N-BN
							90°	2600lm	2000lm	GAPW-8309018N-BN
							90°	2800lm	2200lm	GAPW-8409018N-BN

Standard pendant length: 1200mm

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPW-8279012N-WN
							90°	1900lm	1400lm	GAPW-8309012N-WN
							90°	2000lm	1500lm	GAPW-8409012N-WN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPW-8279018N-WN
							90°	2600lm	2000lm	GAPW-8309018N-WN
							90°	2800lm	2200lm	GAPW-8409018N-WN

Standard pendant length: 1200mm

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPR-8279012N-BN
							90°	1900lm	1400lm	GAPR-8309012N-BN
							90°	2000lm	1500lm	GAPR-8409012N-BN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPR-8279018N-BN
							90°	2600lm	2000lm	GAPR-8309018N-BN
							90°	2800lm	2200lm	GAPR-8409018N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	36 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPR-8279012N-WN
							90°	1900lm	1400lm	GAPR-8309012N-WN
							90°	2000lm	1500lm	GAPR-8409012N-WN
18 W	20 W	36 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPR-8279018N-WN
							90°	2600lm	2000lm	GAPR-8309018N-WN
							90°	2800lm	2200lm	GAPR-8409018N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	110°	900lm	800lm	UM35-827A108N-NN
							110°	950lm	850lm	UM35-830A108N-NN
							110°	1050lm	950lm	UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GAPR-8309012N-WN with Uplight Module
GAPR-8309012N-WN-U

NEKO / GAME450
Ceiling Light System



18W
25W

CRI80
CRI90

2700K
3000K
4000K

Tunable White
Available

90°

OSRAM

50,000h@L80B10

UGR
< 19

IP 40

5

WARRANTY


CB

CE

ETL


us

Intertek




	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279018	N-BN
						3000K	90°	2600lm	2000lm	GBSM-8309018	N-BN
						4000K	90°	2800lm	2200lm	GBSM-8409018	N-BN
 White	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279025	N-BN
						3000K	90°	3700lm	2800lm	GBSM-8309025	N-BN
						4000K	90°	4000lm	3000lm	GBSM-8409025	N-BN
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBSM-8279018	N-WN
						3000K	90°	2600lm	2000lm	GBSM-8309018	N-WN
						4000K	90°	2800lm	2200lm	GBSM-8409018	N-WN
	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBSM-8279025	N-WN
						3000K	90°	3700lm	2800lm	GBSM-8309025	N-WN
						4000K	90°	4000lm	3000lm	GBSM-8409025	N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279018	N-BN
					3000K	90°	2600lm	2000lm	GBPW-8309018	N-BN
					4000K	90°	2800lm	2200lm	GBPW-8409018	N-BN
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279025	N-BN
					3000K	90°	3700lm	2800lm	GBPW-8309025	N-BN
					4000K	90°	4000lm	3000lm	GBPW-8409025	N-BN

Standard pendant length: 1200mm

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPW-8279018	N-WN
					3000K	90°	2600lm	2000lm	GBPW-8309018	N-WN
					4000K	90°	2800lm	2200lm	GBPW-8409018	N-WN
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPW-8279025	N-WN
					3000K	90°	3700lm	2800lm	GBPW-8309025	N-WN
					4000K	90°	4000lm	3000lm	GBPW-8409025	N-WN

Standard pendant length: 1200mm

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPR-8279018	N-BN
					3000K	90°	2600lm	2000lm	GBPR-8309018	N-BN
					4000K	90°	2800lm	2200lm	GBPR-8409018	N-BN
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPR-8279025	N-BN
					3000K	90°	3700lm	2800lm	GBPR-8309025	N-BN
					4000K	90°	4000lm	3000lm	GBPR-8409025	N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	GBPR-8279018	N-WN
					3000K	90°	2600lm	2000lm	GBPR-8309018	N-WN
					4000K	90°	2800lm	2200lm	GBPR-8409018	N-WN
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GBPR-8279025	N-WN
					3000K	90°	3700lm	2800lm	GBPR-8309025	N-WN
					4000K	90°	4000lm	3000lm	GBPR-8409025	N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory




Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111	N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111	N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111	N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GBPR-8309018N-WN with Uplight Module
GBPR-8309018N-WN-U

NEKO / GAME600
Ceiling Light System

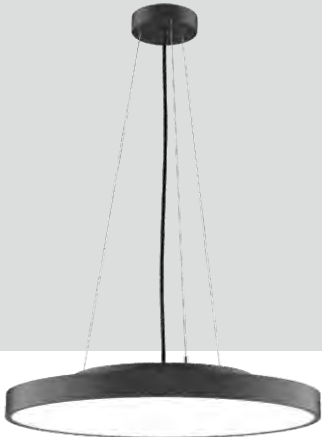

25W
38W
50W

CRI80
CRI90

2700K
3000K
4000K

Tunable White
Available



OSRAM
50,000h@L80B10

UGR
< 19

IP 40



CB

CE



Black




White


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279025N-BN
					3000K	90°	3700lm	2800lm	GCSM-8309025N-BN
					4000K	90°	4000lm	3000lm	GCSM-8409025N-BN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279038N-BN
					3000K	90°	6200lm	4700lm	GCSM-8309038N-BN
					4000K	90°	6600lm	4900lm	GCSM-8409038N-BN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279050N-BN
					3000K	90°	8100lm	6100lm	GCSM-8309050N-BN
					4000K	90°	8600lm	6400lm	GCSM-8409050N-BN

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279025N-WN
					3000K	90°	3700lm	2800lm	GCSM-8309025N-WN
					4000K	90°	4000lm	3000lm	GCSM-8409025N-WN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279038N-WN
					3000K	90°	6200lm	4700lm	GCSM-8309038N-WN
					4000K	90°	6600lm	4900lm	GCSM-8409038N-WN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279050N-WN
					3000K	90°	8100lm	6100lm	GCSM-8309050N-WN
					4000K	90°	8600lm	6400lm	GCSM-8409050N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279025N-BN
					3000K	90°	3700lm	2800lm	GCPW-8309025N-BN
					4000K	90°	4000lm	3000lm	GCPW-8409025N-BN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279038N-BN
					3000K	90°	6200lm	4700lm	GCPW-8309038N-BN
					4000K	90°	6600lm	4900lm	GCPW-8409038N-BN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279050N-BN
					3000K	90°	8100lm	6100lm	GCPW-8309050N-BN
					4000K	90°	8600lm	6400lm	GCPW-8409050N-BN

Standard pendant length: 1200mm

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279025N-WN
					3000K	90°	3700lm	2800lm	GCPW-8309025N-WN
					4000K	90°	4000lm	3000lm	GCPW-8409025N-WN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279038N-WN
					3000K	90°	6200lm	4700lm	GCPW-8309038N-WN
					4000K	90°	6600lm	4900lm	GCPW-8409038N-WN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279050N-WN
					3000K	90°	8100lm	6100lm	GCPW-8309050N-WN
					4000K	90°	8600lm	6400lm	GCPW-8409050N-WN

Standard pendant length: 1200mm

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	G CPR-8279025N-BN
					3000K	90°	3700lm	2800lm	G CPR-8309025N-BN
					4000K	90°	4000lm	3000lm	G CPR-8409025N-BN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	G CPR-8279038N-BN
					3000K	90°	6200lm	4700lm	G CPR-8309038N-BN
					4000K	90°	6600lm	4900lm	G CPR-8409038N-BN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	G CPR-8279050N-BN
					3000K	90°	8100lm	6100lm	G CPR-8309050N-BN
					4000K	90°	8600lm	6400lm	G CPR-8409050N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	G CPR-8279025N-WN
					3000K	90°	3700lm	2800lm	G CPR-8309025N-WN
					4000K	90°	4000lm	3000lm	G CPR-8409025N-WN
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	G CPR-8279038N-WN
					3000K	90°	6200lm	4700lm	G CPR-8309038N-WN
					4000K	90°	6600lm	4900lm	G CPR-8409038N-WN
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	G CPR-8279050N-WN
					3000K	90°	8100lm	6100lm	G CPR-8309050N-WN
					4000K	90°	8600lm	6400lm	G CPR-8409050N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for G CPR-8309038N-WN with Uplight Module
G CPR-8309038N-WN-U

NEKO / GAME900
Ceiling Light System



65W	CRI80 CRI90	2700K 3000K 4000K	90°	OSRAM 50,000h@L80B10	UGR < 19	IP40	5 YEAR GUARANTEE	CB	CE	ETL Intertek
-----	----------------	-------------------------	-----	-------------------------	-------------	------	---------------------	----	----	-----------------



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065	N-BN
					3000K	90°	10500lm	8000lm	GDSM-8309065	N-BN
					4000K	90°	11000lm	8400lm	GDSM-8409065	N-BN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	GDPW-8279065N-BN
					3000K	90°		10500lm	8000lm	GDPW-8309065N-BN
					4000K	90°		11000lm	8400lm	GDPW-8409065N-BN

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-WN

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-BN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-BN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN	
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN	
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Code for GDPR-8309065N-WN with Uplight Module
GDPR-8309065N-WN-U



NEKO / SUGAR350
Ceiling Light System




12W 18W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available	 90°	 OSRAM 50,000h@L80B10	UGR < 19	IP 40	 5 YEAR GUARANTEE	 CB	 CE	
------------	----------------	-------------------------	----------------------------	---	--	-------------	-------	--	--	--	---




	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012	N-BB
						3000K	90°	1900lm	1400lm	SASM-8309012	N-BB
						4000K	90°	2000lm	1500lm	SASM-8409012	N-BB
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018	N-BB
3000K						90°	2600lm	2000lm	SASM-8309018	N-BB	
4000K						90°	2800lm	2200lm	SASM-8409018	N-BB	
 Black-Gold	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012	N-BG
						3000K	90°	1900lm	1400lm	SASM-8309012	N-BG
						4000K	90°	2000lm	1500lm	SASM-8409012	N-BG
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018	N-BG
3000K						90°	2600lm	2000lm	SASM-8309018	N-BG	
4000K						90°	2800lm	2200lm	SASM-8409018	N-BG	
 White	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012	N-WW
						3000K	90°	1900lm	1400lm	SASM-8309012	N-WW
						4000K	90°	2000lm	1500lm	SASM-8409012	N-WW
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018	N-WW
3000K						90°	2600lm	2000lm	SASM-8309018	N-WW	
4000K						90°	2800lm	2200lm	SASM-8409018	N-WW	
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)											


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012	N-BB
					3000K	90°	1900lm	1400lm	SAPW-8309012	N-BB
					4000K	90°	2000lm	1500lm	SAPW-8409012	N-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018	N-BB
					3000K	90°	2600lm	2000lm	SAPW-8309018	N-BB
					4000K	90°	2800lm	2200lm	SAPW-8409018	N-BB

Standard pendant length: 1200mm

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BG
					3000K	90°	1900lm	1400lm	SAPW-8309012N-BG
					4000K	90°	2000lm	1500lm	SAPW-8409012N-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018N-BG
					3000K	90°	2600lm	2000lm	SAPW-8309018N-BG
					4000K	90°	2800lm	2200lm	SAPW-8409018N-BG

Standard pendant length: 1200mm

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-WW
					3000K	90°	1900lm	1400lm	SAPW-8309012N-WW
					4000K	90°	2000lm	1500lm	SAPW-8409012N-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018N-WW
					3000K	90°	2600lm	2000lm	SAPW-8309018N-WW
					4000K	90°	2800lm	2200lm	SAPW-8409018N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN	
					3000K	110°	950lm	850lm	UM35-830A108N-NN	
					4000K	110°	1050lm	950lm	UM35-840A108N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with Uplight Module
SAPW-8309012N-WW-U



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012	N-BB
					3000K	90°	1900lm	1400lm	SAPR-8309012	N-BB
					4000K	90°	2000lm	1500lm	SAPR-8409012	N-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018	N-BB
					3000K	90°	2600lm	2000lm	SAPR-8309018	N-BB
					4000K	90°	2800lm	2200lm	SAPR-8409018	N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-BG
						3000K 90°	1900lm	1400lm	SAPR-8309012N-BG
						4000K 90°	2000lm	1500lm	SAPR-8409012N-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018N-BG
						3000K 90°	2600lm	2000lm	SAPR-8309018N-BG
						4000K 90°	2800lm	2200lm	SAPR-8409018N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-WW
						3000K 90°	1900lm	1400lm	SAPR-8309012N-WW
						4000K 90°	2000lm	1500lm	SAPR-8409012N-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018N-WW
						3000K 90°	2600lm	2000lm	SAPR-8309018N-WW
						4000K 90°	2800lm	2200lm	SAPR-8409018N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
8 W	10 W	33 V	250 mA	80	2700K	110°		900lm	800lm	UM35-827A108N-NN	
						3000K	110°		950lm	850lm	UM35-830A108N-NN
						4000K	110°		1050lm	950lm	UM35-840A108N-NN


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with Uplight Module
SAPW-8309012N-WW-U


SUGAR now with
UPLIGHT



NEKO / SUGAR450
Ceiling Light System

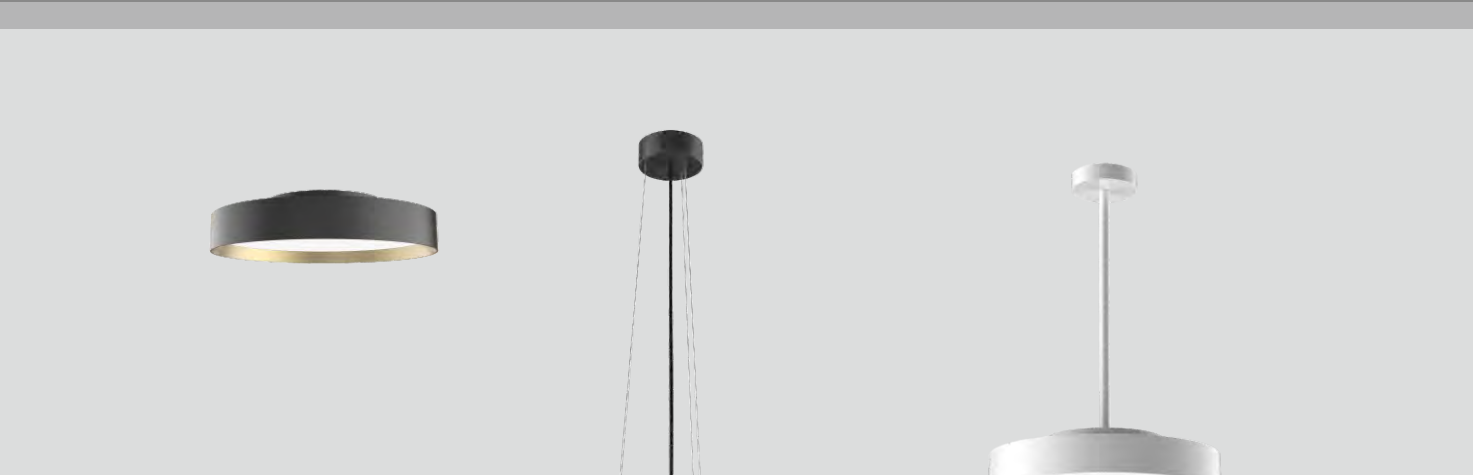


18W 25W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available		OSRAM 50,000h@L80B10	UGR < 19	IP 40		CB	CE	
------------	----------------	-------------------------	----------------------------	---	--------------------------------	-------------	-------	---	----	----	---




	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018N-BB	
						3000K	90°	2600lm	2000lm	SBSM-8309018N-BB	
						4000K	90°	2800lm	2200lm	SBSM-8409018N-BB	
	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025N-BB	
						3000K	90°	3700lm	2800lm	SBSM-8309025N-BB	
						4000K	90°	4000lm	3000lm	SBSM-8409025N-BB	
 Black-Gold	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018N-BG	
						3000K	90°	2600lm	2000lm	SBSM-8309018N-BG	
						4000K	90°	2800lm	2200lm	SBSM-8409018N-BG	
	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025N-BG	
						3000K	90°	3700lm	2800lm	SBSM-8309025N-BG	
						4000K	90°	4000lm	3000lm	SBSM-8409025N-BG	
 White	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018N-WW	
						3000K	90°	2600lm	2000lm	SBSM-8309018N-WW	
						4000K	90°	2800lm	2200lm	SBSM-8409018N-WW	
	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025N-WW	
						3000K	90°	3700lm	2800lm	SBSM-8309025N-WW	
						4000K	90°	4000lm	3000lm	SBSM-8409025N-WW	


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018N-BB	
					3000K	90°	2600lm	2000lm	SBPW-8309018N-BB	
					4000K	90°	2800lm	2200lm	SBPW-8409018N-BB	
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025N-BB	
					3000K	90°	3700lm	2800lm	SBPW-8309025N-BB	
					4000K	90°	4000lm	3000lm	SBPW-8409025N-BB	

Standard pendant length: 1200mm

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018N-BG
					3000K	90°	2600lm	2000lm	SBPW-8309018N-BG
					4000K	90°	2800lm	2200lm	SBPW-8409018N-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025N-BG
					3000K	90°	3700lm	2800lm	SBPW-8309025N-BG
					4000K	90°	4000lm	3000lm	SBPW-8409025N-BG

Standard pendant length: 1200mm

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018N-WW
					3000K	90°	2600lm	2000lm	SBPW-8309018N-WW
					4000K	90°	2800lm	2200lm	SBPW-8409018N-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025N-WW
					3000K	90°	3700lm	2800lm	SBPW-8309025N-WW
					4000K	90°	4000lm	3000lm	SBPW-8409025N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN	
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN	
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309018N-WN with Uplight Module
SBPW-8309018N-WN-U



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018	N-BB
					3000K	90°	2600lm	2000lm	SBPR-8309018	N-BB
					4000K	90°	2800lm	2200lm	SBPR-8409018	N-BB
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025	N-BB
					3000K	90°	3700lm	2800lm	SBPR-8309025	N-BB
					4000K	90°	4000lm	3000lm	SBPR-8409025	N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018N-BG
					3000K	90°	2600lm	2000lm	SBPR-8309018N-BG
					4000K	90°	2800lm	2200lm	SBPR-8409018N-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025N-BG
					3000K	90°	3700lm	2800lm	SBPR-8309025N-BG
					4000K	90°	4000lm	3000lm	SBPR-8409025N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018N-WW
					3000K	90°	2600lm	2000lm	SBPR-8309018N-WW
					4000K	90°	2800lm	2200lm	SBPR-8409018N-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025N-WW
					3000K	90°	3700lm	2800lm	SBPR-8309025N-WW
					4000K	90°	4000lm	3000lm	SBPR-8409025N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN	
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN	
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPR-8309018N-WW with Uplight Module
SBPR-8309018N-WW-U



NEKO / SUGAR600
Ceiling Light System



25W
38W
50W

CRI80
CRI90

2700K
3000K
4000K

Tunable White
Available

90°

OSRAM

50,000h@L80B10

UGR < 19

IP 40

5 YEARS
GUARANTEE


CB

CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 Black	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025	N-BB	
						3000K	90°	3700lm	2800lm	SCSM-8309025	N-BB	
						4000K	90°	4000lm	3000lm	SCSM-8409025	N-BB	
	38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038	N-BB	
						3000K	90°	6200lm	4700lm	SCSM-8309038	N-BB	
						4000K	90°	6600lm	4900lm	SCSM-8409038	N-BB	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050	N-BB	
						3000K	90°	8100lm	6100lm	SCSM-8309050	N-BB	
						4000K	90°	8600lm	6400lm	SCSM-8409050	N-BB	
	 Black-Gold	25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025	N-BG
							3000K	90°	3700lm	2800lm	SCSM-8309025	N-BG
							4000K	90°	4000lm	3000lm	SCSM-8409025	N-BG
38 W		42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038	N-BG	
						3000K	90°	6200lm	4700lm	SCSM-8309038	N-BG	
						4000K	90°	6600lm	4900lm	SCSM-8409038	N-BG	
50 W		54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050	N-BG	
						3000K	90°	8100lm	6100lm	SCSM-8309050	N-BG	
						4000K	90°	8600lm	6400lm	SCSM-8409050	N-BG	
 White		25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025	N-WW
							3000K	90°	3700lm	2800lm	SCSM-8309025	N-WW
							4000K	90°	4000lm	3000lm	SCSM-8409025	N-WW
	38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038	N-WW	
						3000K	90°	6200lm	4700lm	SCSM-8309038	N-WW	
						4000K	90°	6600lm	4900lm	SCSM-8409038	N-WW	
	50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050	N-WW	
						3000K	90°	8100lm	6100lm	SCSM-8309050	N-WW	
						4000K	90°	8600lm	6400lm	SCSM-8409050	N-WW	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025N-BB	
					3000K	90°	3700lm	2800lm	SCPW-8309025N-BB	
					4000K	90°	4000lm	3000lm	SCPW-8409025N-BB	
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038N-BB	
					3000K	90°	6200lm	4700lm	SCPW-8309038N-BB	
					4000K	90°	6600lm	4900lm	SCPW-8409038N-BB	
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050N-BB	
					3000K	90°	8100lm	6100lm	SCPW-8309050N-BB	
					4000K	90°	8600lm	6400lm	SCPW-8409050N-BB	

Standard pendant length: 1200mm

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025N-BG
					3000K	90°	3700lm	2800lm	SCPW-8309025N-BG
					4000K	90°	4000lm	3000lm	SCPW-8409025N-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038N-BG
					3000K	90°	6200lm	4700lm	SCPW-8309038N-BG
					4000K	90°	6600lm	4900lm	SCPW-8409038N-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050N-BG
					3000K	90°	8100lm	6100lm	SCPW-8309050N-BG
					4000K	90°	8600lm	6400lm	SCPW-8409050N-BG

Standard pendant length: 1200mm

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025N-WW
					3000K	90°	3700lm	2800lm	SCPW-8309025N-WW
					4000K	90°	4000lm	3000lm	SCPW-8409025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038N-WW
					3000K	90°	6200lm	4700lm	SCPW-8309038N-WW
					4000K	90°	6600lm	4900lm	SCPW-8409038N-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050N-WW
					3000K	90°	8100lm	6100lm	SCPW-8309050N-WW
					4000K	90°	8600lm	6400lm	SCPW-8409050N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°		1800lm	1600lm	UM60-827A118N-NN
					3000K	110°		1900lm	1700lm	UM60-830A118N-NN
					4000K	110°		2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPW-8279038N-WW with Uplight Module
SCPW-8279038N-WW-U



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025	N-BB
					3000K	90°	3700lm	2800lm	SCPR-8309025	N-BB
					4000K	90°	4000lm	3000lm	SCPR-8409025	N-BB
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038	N-BB
					3000K	90°	6200lm	4700lm	SCPR-8309038	N-BB
					4000K	90°	6600lm	4900lm	SCPR-8409038	N-BB
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050	N-BB
					3000K	90°	8100lm	6100lm	SCPR-8309050	N-BB
					4000K	90°	8600lm	6400lm	SCPR-8409050	N-BB
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional			

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025N-BG
					3000K	90°	3700lm	2800lm	SCPR-8309025N-BG
					4000K	90°	4000lm	3000lm	SCPR-8409025N-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038N-BG
					3000K	90°	6200lm	4700lm	SCPR-8309038N-BG
					4000K	90°	6600lm	4900lm	SCPR-8409038N-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050N-BG
					3000K	90°	8100lm	6100lm	SCPR-8309050N-BG
					4000K	90°	8600lm	6400lm	SCPR-8409050N-BG
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional		

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025N-WW
					3000K	90°	3700lm	2800lm	SCPR-8309025N-WW
					4000K	90°	4000lm	3000lm	SCPR-8409025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038N-WW
					3000K	90°	6200lm	4700lm	SCPR-8309038N-WW
					4000K	90°	6600lm	4900lm	SCPR-8409038N-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050N-WW
					3000K	90°	8100lm	6100lm	SCPR-8309050N-WW
					4000K	90°	8600lm	6400lm	SCPR-8409050N-WW
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional		

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 800

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN	
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN	
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN	
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)										

Code for SCPR-8309038N-WW with Uplight Module
SCPR-8309038N-WW-U



White-Gold Optional

NEKO / SUGAR900
Ceiling Light System



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065	N-BB
										SDSM-8309065
										SDSM-8409065



Black



Black-Gold



White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065	N-BG
					3000K	90°	10500lm	8000lm	SDSM-8309065	N-BG
					4000K	90°	11000lm	8400lm	SDSM-8409065	N-BG

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065	N-WW
					3000K	90°	10500lm	8000lm	SDSM-8309065	N-WW
					4000K	90°	11000lm	8400lm	SDSM-8409065	N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065	N-BB
										SDPW-8309065
										SDPW-8409065

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065	N-BG
					3000K	90°	10500lm	8000lm	SDPW-8309065	N-BG
					4000K	90°	11000lm	8400lm	SDPW-8409065	N-BG

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065	N-WW
					3000K	90°	10500lm	8000lm	SDPW-8309065	N-WW
					4000K	90°	11000lm	8400lm	SDPW-8409065	N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125	N-NN
										UM90-830A125
										UM90-840A125

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Code for SDPW-8309065N-WW with Uplight Module
SDPW-8309065N-WW-U



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-BB
					3000K	90°		10500lm	8000lm	SDPR-8309065N-BB
					4000K	90°		11000lm	8400lm	SDPR-8409065N-BB
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional			

65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-BG
					3000K	90°		10500lm	8000lm	SDPR-8309065N-BG
					4000K	90°		11000lm	8400lm	SDPR-8409065N-BG
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional			

65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-WW
					3000K	90°		10500lm	8000lm	SDPR-8309065N-WW
					4000K	90°		11000lm	8400lm	SDPR-8409065N-WW
Standard pendant length: 1000mm (customized lengths available)							Remark: Field cuttable pendant rod solution optional			

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°		2500lm	2200lm	UM90-827A125N-NN
					3000K	110°		2700lm	2400lm	UM90-830A125N-NN
					4000K	110°		2900lm	2600lm	UM90-840A125N-NN
							Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)			

Code for SDPR-8309065N-WW with Uplight Module
SDPR-8309065N-WW-U





GINGER 400 G4RC-30W



GINGER 600 G6RC-50W



PEPPER 400 P4SC-30W

NEKO / GINGER 400

LED Ceiling Light

Aluminum Frame & Homogen Light

Incl. Phase Dim Driver

NEW




NEKO / GINGER 400

LED Ceiling Light

Aluminum Frame & Homogen Light

ON-OFF Driver+Microwave Sensor

NEW

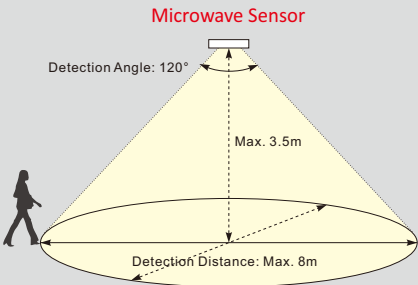

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44			
								Ø400



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-WN


Code Remark: P=(Phase Dim)



28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Light Distribution

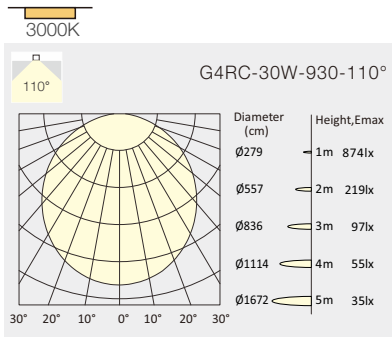

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44				
									Ø400



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-WN


Code Remark: S=On-Off LED Driver+Microwave Sensor



28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution

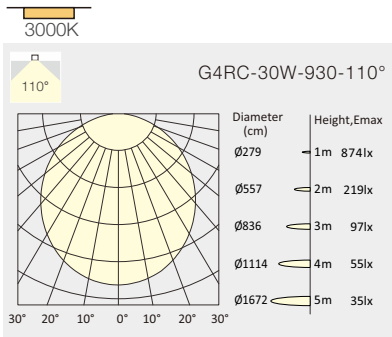



50W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux 50,000h@L80B10	IP44		CE	
-----	-------	-------------------------------------	------	-----------------------------	------	--	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
46 W	50 W	95 V	480 mA	90	3000K	110°	5000lm	4000lm	G6RC-9S3A150P-WN
					3500K	110°	5200lm	4200lm	G6RC-9S3A150P-WN
					4000K	110°	5100lm	4000lm	G6RC-9S3A150P-WN


Code Remark: P=(Phase Dim)






46 W	50 W	95 V	480 mA	90	3000K	110°	5000lm	4000lm	G6RC-9S3A150P-BN
					3500K	110°	5200lm	4200lm	G6RC-9S3A150P-BN
					4000K	110°	5100lm	4000lm	G6RC-9S3A150P-BN

Code Remark: P=(Phase Dim)

Light Distribution

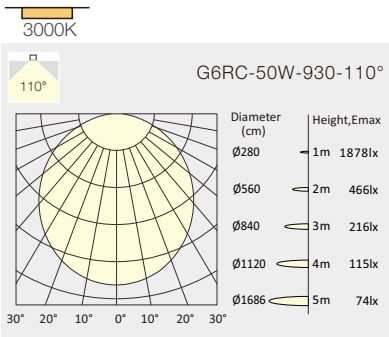

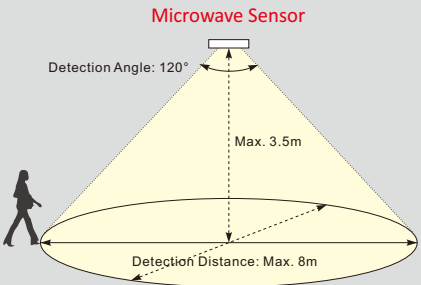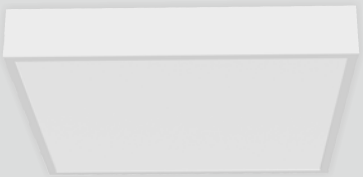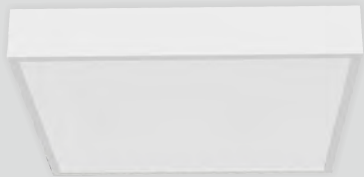


30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEAR WARRANTY	CE		65	Ø400X400
-----	-------	-------------------------------------	------	------------------------------	------	-----------------------	----	--	----	----------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN


Code Remark: P=(Phase Dim)




28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Light Distribution

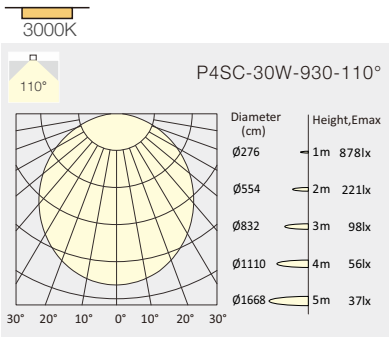


30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEAR WARRANTY	CE		65	Ø400X400
-----	-------	-------------------------------------	------	------------------------------	------	-----------------------	----	--	----	----------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN


Code Remark: S=On-Off LED Driver+Microwave Sensor



28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution

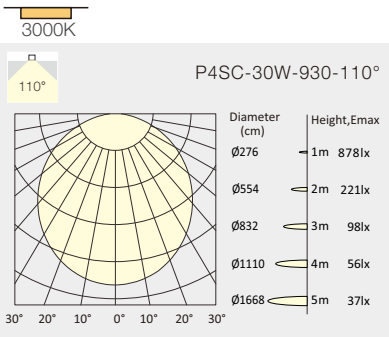



SKYDRIVER SDRC-10W



SKYDRIVER SDSC-10W




SKYJOY Single SJSC-8W




SKYJOY Double SJDC-16W



SKYLINE SL5C-10W



10W	CR190	2700K 3000K	36°	CITIZEN 50,000h Ø180B10	UGR < 19	IP20	5 GUARANTEE	CE
-----	-------	----------------	-----	--	----------	------	-----------------------------------	----



10W	CR190	2700K 3000K	36°	CITIZEN 50,000h Ø180B10	UGR < 19	IP20	5 GUARANTEE	CE
-----	-------	----------------	-----	--	----------	------	-----------------------------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW

Code Remark: P=(Phase Dim)




8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB

Code Remark: P=(Phase Dim)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW


Code Remark: P=(Phase Dim)




8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB

Code Remark: P=(Phase Dim)


Feature




Light Distribution

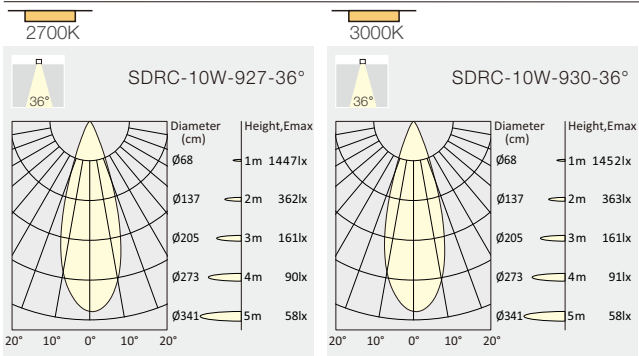

Feature



Light Distribution

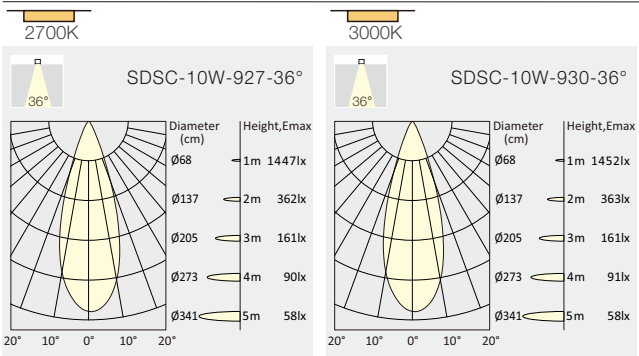

NEKO / SKYJOY Single SJSC

LED Ceiling Light

Incl. Phase Dim Driver

NEW




8W	CRI90	2700K	36°	CITIZEN 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE	135 60 135
----	-------	-------	-----	---------------------------------------	----------	------	----------------------------	----	-------------------------------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-WW


Code Remark: P=(Phase Dim)



7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-BB
-----	-----	------	--------	----	-------	-----	-------	-------	------------------


Code Remark: P=(Phase Dim)

Feature


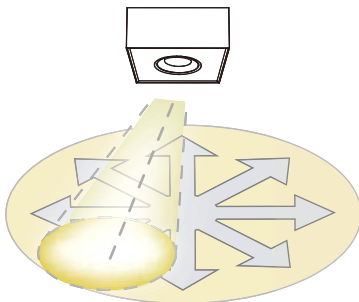


Tilt 25° in all direction (360°)

Light Distribution




10W	CRI90	1800K-3000K Dim to Warm	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE
-----	-------	----------------------------	-----	---	----------	------	----------------------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW


Code Remark: P=(Phase Dim)



9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB
-----	------	------	--------	----	-------------	-----	-------	-----------	------------------


Code Remark: P=(Phase Dim)

Feature

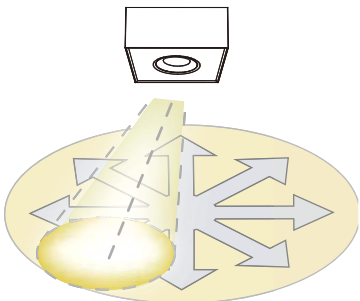

Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM

1800K

2700K

3000K



NEKO / SKYJOY Double SJDC


LED Ceiling Light

Incl. Phase Dim Driver

NEW




16W	CRI90	2700K	36°	CITIZEN 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE	22460135
-----	-------	-------	-----	---------------------------------------	----------	------	----------------------------	----	---------------------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW


Code Remark: P=(Phase Dim)



14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------


Code Remark: P=(Phase Dim)

Feature


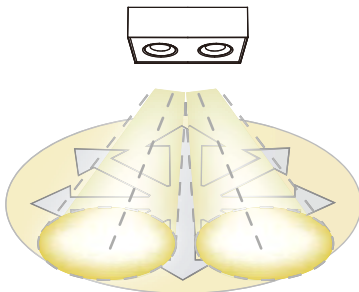


Tilt 25° in all direction (360°)

Light Distribution

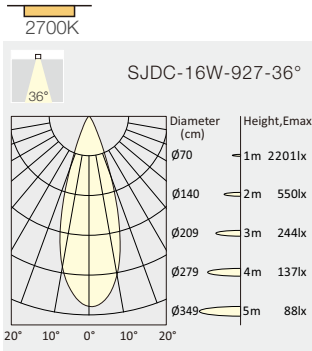


20W	CRI90	1800K-3000K Dim to Warm	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE
-----	-------	----------------------------	-----	---	----------	------	----------------------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	35 V	500 mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW


Code Remark: P=(Phase Dim)



18 W	20 W	35 V	500 mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB
------	------	------	--------	----	-------------	-----	--------	------------	------------------


Code Remark: P=(Phase Dim)

Feature

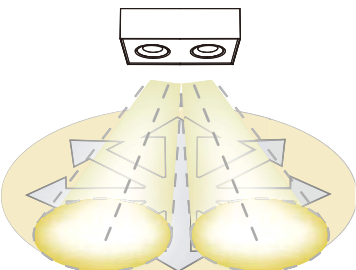

Tilt 25° in all direction (360°)

Light Distribution

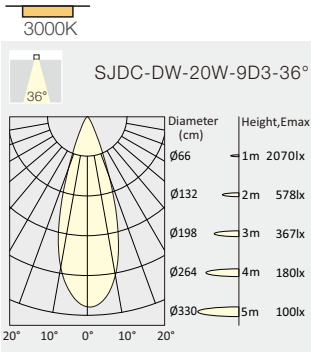

DIM to WARM

1800K

2700K

3000K



Project: Hovenloen Restaurant, Norway



8.5W

CRI90

2700K
3000K

30°


CREE
50,000h@L80B10

UGR
< 19

IP20

5
YEAR
WARRANTY

CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS

Code Remark: P=(Phase Dim)

8.5 W	10 W	14.5 V	6500 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=(Phase Dim)

Light Distribution

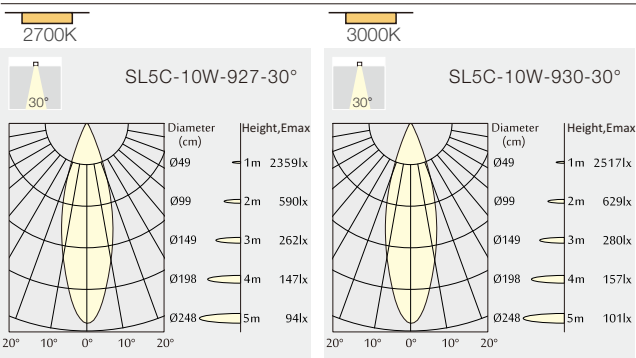



MIU-CM



MIU-CL



MIU-PS



MIU-PM



MIU-PL

NEKO / MIU / MIU-C M
Ceiling Mounted Light



21W 15W CRI90 2700K 3000K 4000K 15° 25° 30° CITIZEN 50,000h@L80B10 UGR < 19 IP20 5 YEAR GUARANTEE CB CE



Black



Gold



Black



White



Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						25°	1400lm	1100lm	MCM1-9272515F-WB
						30°	1400lm	1100lm	MCM1-9273015F-WB
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
						25°	1500lm	1200lm	MCM1-9302515F-WB
						30°	1500lm	1200lm	MCM1-9303015F-WB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
						25°	1600lm	1300lm	MCM1-9402515F-WB
						30°	1600lm	1300lm	MCM1-9403015F-WB
					2700K	15°	1900lm	1500lm	MCM2-9271521F-WB
						25°	1900lm	1500lm	MCM2-9272521F-WB
						30°	1900lm	1500lm	MCM2-9273021F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	2000lm	1600lm	MCM2-9301521F-WB
						25°	2000lm	1600lm	MCM2-9302521F-WB
						30°	2000lm	1600lm	MCM2-9303021F-WB
					3000K	15°	2100lm	1700lm	MCM2-9401521F-WB
						25°	2100lm	1700lm	MCM2-9402521F-WB
						30°	2100lm	1700lm	MCM2-9403021F-WB
					2700K	15°	1900lm	1500lm	MCM2-9271521F-WW
						25°	1900lm	1500lm	MCM2-9272521F-WW
						30°	1900lm	1500lm	MCM2-9273021F-WW
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WW
						25°	2000lm	1600lm	MCM2-9302521F-WW
						30°	2000lm	1600lm	MCM2-9303021F-WW
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WG
						25°	1400lm	1100lm	MCM1-9272515F-WG
						30°	1400lm	1100lm	MCM1-9273015F-WG
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WG
						25°	1500lm	1200lm	MCM1-9302515F-WG
						30°	1500lm	1200lm	MCM1-9303015F-WG
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WG
						25°	1600lm	1300lm	MCM1-9402515F-WG
						30°	1600lm	1300lm	MCM1-9403015F-WG
					2700K	15°	1900lm	1500lm	MCM2-9271521F-WG
						25°	1900lm	1500lm	MCM2-9272521F-WG
						30°	1900lm	1500lm	MCM2-9273021F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	2000lm	1600lm	MCM2-9301521F-WG
						25°	2000lm	1600lm	MCM2-9302521F-WG
						30°	2000lm	1600lm	MCM2-9303021F-WG
					3000K	15°	2100lm	1700lm	MCM2-9401521F-WG
						25°	2100lm	1700lm	MCM2-9402521F-WG
						30°	2100lm	1700lm	MCM2-9403021F-WG
					2700K	15°	1900lm	1500lm	MCM2-9271521F-WG
						25°	1900lm	1500lm	MCM2-9272521F-WG
						30°	1900lm	1500lm	MCM2-9273021F-WG
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WG
						25°	2000lm	1600lm	MCM2-9302521F-WG
						30°	2000lm	1600lm	MCM2-9303021F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MCM1-930 1515F-WB with Honeycomb
MCM1-930 1515F-WB-H

NEKO / MIU / MIU-CL
Ceiling Mounted Light



28W	CRI90	2700K 3000K 4000K	  		UGR < 19	IP 20		CB	CE
-----	-------	-------------------------	---	---	----------	-------	---	----	----



Black



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BB							
							30° 3200lm	2500lm	MCL1-9273028F-BB							
							45° 3200lm	2500lm	MCL1-9274528F-BB							
						3000K	18° 3400lm	2700lm	MCL1-9301828F-BB							
							30° 3400lm	2700lm	MCL1-9303028F-BB							
							45° 3400lm	2700lm	MCL1-9304528F-BB							
						4000K	18° 3600lm	2900lm	MCL1-9401828F-BB							
							30° 3600lm	2900lm	MCL1-9403028F-BB							
							45° 3600lm	2900lm	MCL1-9404528F-BB							

						25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BG	
													30° 3200lm	2500lm	MCL1-9273028F-BG	
45° 3200lm	2500lm	MCL1-9274528F-BG														
3000K	18° 3400lm	2700lm	MCL1-9301828F-BG													
	30° 3400lm	2700lm	MCL1-9303028F-BG													
	45° 3400lm	2700lm	MCL1-9304528F-BG													
4000K	18° 3600lm	2900lm	MCL1-9401828F-BG													
	30° 3600lm	2900lm	MCL1-9403028F-BG													
	45° 3600lm	2900lm	MCL1-9404528F-BG													

Code Remark: F=(ON-OFF) D=D(DALI Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB						
						30°	3200lm	2500lm	MCL1-9273028F-WB						
						45°	3200lm	2500lm	MCL1-9274528F-WB						
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WB					
							30°	3400lm	2700lm	MCL1-9303028F-WB					
							45°	3400lm	2700lm	MCL1-9304528F-WB					
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WB					
							30°	3600lm	2900lm	MCL1-9403028F-WB					
							45°	3600lm	2900lm	MCL1-9404528F-WB					
						25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WW
												30°	3200lm	2500lm	MCL1-9273028F-WW
												45°	3200lm	2500lm	MCL1-9274528F-WW
3000K	18°	3400lm	2700lm	MCL1-9301828F-WW											
	30°	3400lm	2700lm	MCL1-9303028F-WW											
	45°	3400lm	2700lm	MCL1-9304528F-WW											
4000K	18°	3600lm	2900lm	MCL1-9401828F-WW											
	30°	3600lm	2900lm	MCL1-9403028F-WW											
	45°	3600lm	2900lm	MCL1-9404528F-WW											
25 W	28 W	36 V	700 mA	90	2700K							18°	3200lm	2500lm	MCL1-9271828F-WG
												30°	3200lm	2500lm	MCL1-9273028F-WG
												45°	3200lm	2500lm	MCL1-9274528F-WG
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WG					
							30°	3400lm	2700lm	MCL1-9303028F-WG					
							45°	3400lm	2700lm	MCL1-9304528F-WG					
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WG					
							30°	3600lm	2900lm	MCL1-9403028F-WG					
							45°	3600lm	2900lm	MCL1-9404528F-WG					

Code Remark: F=(ON-OFF) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for MCL1-930 1828F-WB with Honeycomb
MCL1-930 1828F-WB-H



NEKO / MIU / MIU-P S
Pendant Light



11W

CRI90

2700K
3000K
4000K

18°

24°

36°

CITIZEN

LED LIGHTING

50,000h@L80B10

UGR
< 19

IP 20

5

YEARS

GUARANTEE

CB

CE

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BB	
							24°	850lm	700lm	MPS1-9272411F-BB	
							36°	850lm	700lm	MPS1-9273611F-BB	
							3000K	18°	950lm	720lm	MPS1-9301811F-BB
							24°	950lm	720lm	MPS1-9302411F-BB	
							36°	950lm	720lm	MPS1-9303611F-BB	
	9 W	11 W	36 V	250 mA	90	2700K	18°	1050lm	800lm	MPS1-9401811F-BB	
							24°	1050lm	800lm	MPS1-9402411F-BB	
							36°	1050lm	800lm	MPS1-9403611F-BB	
							3000K	18°	950lm	720lm	MPS1-9301811F-BG
							24°	950lm	720lm	MPS1-9302411F-BG	
							36°	950lm	720lm	MPS1-9303611F-BG	
 Gold	9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BG	
							24°	850lm	700lm	MPS1-9272411F-BG	
							36°	850lm	700lm	MPS1-9273611F-BG	
							3000K	18°	950lm	720lm	MPS1-9301811F-BG
							24°	950lm	720lm	MPS1-9302411F-BG	
							36°	950lm	720lm	MPS1-9303611F-BG	
	9 W	11 W	36 V	250 mA	90	2700K	18°	1050lm	800lm	MPS1-9401811F-BG	
							24°	1050lm	800lm	MPS1-9402411F-BG	
							36°	1050lm	800lm	MPS1-9403611F-BG	
							3000K	18°	950lm	720lm	MPS1-9301811F-WB
							24°	950lm	720lm	MPS1-9302411F-WB	
							36°	950lm	720lm	MPS1-9303611F-WB	

Code Remark: F=(ON-OFF) P=(Phase Dim)

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WB				
						24°	850lm	700lm	MPS1-9272411F-WB				
						36°	850lm	700lm	MPS1-9273611F-WB				
						3000K	18°	950lm	720lm	MPS1-9301811F-WB			
							24°	950lm	720lm	MPS1-9302411F-WB			
							36°	950lm	720lm	MPS1-9303611F-WB			
						4000K	18°	1050lm	800lm	MPS1-9401811F-WB			
							24°	1050lm	800lm	MPS1-9402411F-WB			
							36°	1050lm	800lm	MPS1-9403611F-WB			

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WW				
						24°	850lm	700lm	MPS1-9272411F-WW				
						36°	850lm	700lm	MPS1-9273611F-WW				
						3000K	18°	950lm	720lm	MPS1-9301811F-WW			
							24°	950lm	720lm	MPS1-9302411F-WW			
							36°	950lm	720lm	MPS1-9303611F-WW			
						4000K	18°	1050lm	800lm	MPS1-9401811F-WW			
							24°	1050lm	800lm	MPS1-9402411F-WW			
							36°	1050lm	800lm	MPS1-9403611F-WW			

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WG				
						24°	850lm	700lm	MPS1-9272411F-WG				
						36°	850lm	700lm	MPS1-9273611F-WG				
					3000K	18°	950lm	720lm	MPS1-9301811F-WG				
						24°	950lm	720lm	MPS1-9302411F-WG				
						36°	950lm	720lm	MPS1-9303611F-WG				
					4000K	18°	1050lm	800lm	MPS1-9401811F-WG				
						24°	1050lm	800lm	MPS1-9402411F-WG				
						36°	1050lm	800lm	MPS1-9403611F-WG				

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MPS1-930 1811F-WB with Honeycomb
MPS1-930 1811F-WB-H

NEKO / MIU / MIU-P M
Pendant Light



	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BB	
								25°	1400lm	1100lm	MPM1-9272515F-BB
								30°	1400lm	1100lm	MPM1-9273015F-BB
							3000K	15°	1500lm	1200lm	MPM1-9301515F-BB
								25°	1500lm	1200lm	MPM1-9302515F-BB
								30°	1500lm	1200lm	MPM1-9303015F-BB
							4000K	15°	1600lm	1300lm	MPM1-9401515F-BB
								25°	1600lm	1300lm	MPM1-9402515F-BB
								30°	1600lm	1300lm	MPM1-9403015F-BB
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BB	
								25°	1900lm	1500lm	MPM2-9272521F-BB
								30°	1900lm	1500lm	MPM2-9273021F-BB
							3000K	15°	2000lm	1600lm	MPM2-9301521F-BB
								25°	2000lm	1600lm	MPM2-9302521F-BB
								30°	2000lm	1600lm	MPM2-9303021F-BB
							4000K	15°	2100lm	1700lm	MPM2-9401521F-BB
								25°	2100lm	1700lm	MPM2-9402521F-BB
								30°	2100lm	1700lm	MPM2-9403021F-BB
 Gold	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BG	
								25°	1400lm	1100lm	MPM1-9272515F-BG
								30°	1400lm	1100lm	MPM1-9273015F-BG
							3000K	15°	1500lm	1200lm	MPM1-9301515F-BG
								25°	1500lm	1200lm	MPM1-9302515F-BG
								30°	1500lm	1200lm	MPM1-9303015F-BG
							4000K	15°	1600lm	1300lm	MPM1-9401515F-BG
								25°	1600lm	1300lm	MPM1-9402515F-BG
								30°	1600lm	1300lm	MPM1-9403015F-BG
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BG	
								25°	1900lm	1500lm	MPM2-9272521F-BG
								30°	1900lm	1500lm	MPM2-9273021F-BG
							3000K	15°	2000lm	1600lm	MPM2-9301521F-BG
								25°	2000lm	1600lm	MPM2-9302521F-BG
								30°	2000lm	1600lm	MPM2-9303021F-BG
							4000K	15°	2100lm	1700lm	MPM2-9401521F-BG
								25°	2100lm	1700lm	MPM2-9402521F-BG
								30°	2100lm	1700lm	MPM2-9403021F-BG
Code Remark: F=(ON-OFF) P=(Phase Dim)											

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB	
						25°	1400lm	1100lm	MPM1-9272515F-WB	
						30°	1400lm	1100lm	MPM1-9273015F-WB	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
							25°	1500lm	1200lm	MPM1-9302515F-WB
							30°	1500lm	1200lm	MPM1-9303015F-WB
						4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
							25°	1600lm	1300lm	MPM1-9402515F-WB
							30°	1600lm	1300lm	MPM1-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WB	
						25°	1900lm	1500lm	MPM2-9272521F-WB	
						30°	1900lm	1500lm	MPM2-9273021F-WB	
						3000K	15°	2000lm	1600lm	MPM2-9301521F-WB
							25°	2000lm	1600lm	MPM2-9302521F-WB
							30°	2000lm	1600lm	MPM2-9303021F-WB
						4000K	15°	2100lm	1700lm	MPM2-9401521F-WB
							25°	2100lm	1700lm	MPM2-9402521F-WB
							30°	2100lm	1700lm	MPM2-9403021F-WB
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WW	
						25°	1400lm	1100lm	MPM1-9272515F-WW	
						30°	1400lm	1100lm	MPM1-9273015F-WW	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-WW
							25°	1500lm	1200lm	MPM1-9302515F-WW
							30°	1500lm	1200lm	MPM1-9303015F-WW
						4000K	15°	1600lm	1300lm	MPM1-9401515F-WW
							25°	1600lm	1300lm	MPM1-9402515F-WW
							30°	1600lm	1300lm	MPM1-9403015F-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WW	
						25°	1900lm	1500lm	MPM2-9272521F-WW	
						30°	1900lm	1500lm	MPM2-9273021F-WW	
						3000K	15°	2000lm	1600lm	MPM2-9301521F-WW
							25°	2000lm	1600lm	MPM2-9302521F-WW
							30°	2000lm	1600lm	MPM2-9303021F-WW
						4000K	15°	2100lm	1700lm	MPM2-9401521F-WW
							25°	2100lm	1700lm	MPM2-9402521F-WW
							30°	2100lm	1700lm	MPM2-9403021F-WW
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WG	
						25°	1400lm	1100lm	MPM1-9272515F-WG	
						30°	1400lm	1100lm	MPM1-9273015F-WG	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-WG
							25°	1500lm	1200lm	MPM1-9302515F-WG
							30°	1500lm	1200lm	MPM1-9303015F-WG
						4000K	15°	1600lm	1300lm	MPM1-9401515F-WG
							25°	1600lm	1300lm	MPM1-9402515F-WG
							30°	1600lm	1300lm	MPM1-9403015F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-WG	
						25°	1900lm	1500lm	MPM2-9272521F-WG	
						30°	1900lm	1500lm	MPM2-9273021F-WG	
						3000K	15°	2000lm	1600lm	MPM2-9301521F-WG
							25°	2000lm	1600lm	MPM2-9302521F-WG
							30°	2000lm	1600lm	MPM2-9303021F-WG
						4000K	15°	2100lm	1700lm	MPM2-9401521F-WG
							25°	2100lm	1700lm	MPM2-9402521F-WG
							30°	2100lm	1700lm	MPM2-9403021F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MCM1-930 1515F-WB with Honeycomb
MCM1-930 1515F-WB-H

NEKO / MIU / MIU-P L
Pendant Light



28W

CRI90

2700K
3000K
4000K

18°

30°

45°

CITIZEN

50,000h@L80B10

UGR < 19

IP 20

5 YEARS

GUARANTEE

CB

CE

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828	F-WB		
							3200lm	2500lm	MPL1-9273028	F-WB		
							3200lm	2500lm	MPL1-9274528	F-WB		
						3000K	18°	3400lm	2700lm	MPL1-9301828	F-WB	
								3400lm	2700lm	MPL1-9303028	F-WB	
								3400lm	2700lm	MPL1-9304528	F-WB	
						4000K	18°	3600lm	2900lm	MPL1-9401828	F-WB	
								3600lm	2900lm	MPL1-9403028	F-WB	
								3600lm	2900lm	MPL1-9404528	F-WB	
							4000K	30°	3600lm	2900lm	MPL1-9403028	F-WB
									3600lm	2900lm	MPL1-9403028	F-WB
									3600lm	2900lm	MPL1-9404528	F-WB

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WW	
						30°	3200lm	2500lm	MPL1-9273028F-WW	
						45°	3200lm	2500lm	MPL1-9274528F-WW	
						3000K	18°	3400lm	2700lm	MPL1-9301828F-WW
							30°	3400lm	2700lm	MPL1-9303028F-WW
							45°	3400lm	2700lm	MPL1-9304528F-WW
						4000K	18°	3600lm	2900lm	MPL1-9401828F-WW
							30°	3600lm	2900lm	MPL1-9403028F-WW
							45°	3600lm	2900lm	MPL1-9404528F-WW

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WG	
						30°	3200lm	2500lm	MPL1-9273028F-WG	
						45°	3200lm	2500lm	MPL1-9274528F-WG	
						3000K	18°	3400lm	2700lm	MPL1-9301828F-WG
							30°	3400lm	2700lm	MPL1-9303028F-WG
							45°	3400lm	2700lm	MPL1-9304528F-WG
						4000K	18°	3600lm	2900lm	MPL1-9401828F-WG
							30°	3600lm	2900lm	MPL1-9403028F-WG
							45°	3600lm	2900lm	MPL1-9404528F-WG

Code Remark: F=(ON-OFF) D=D(DALI Dim)

Optional accessory



Code for MPL1-930 1828F-WB with Honeycomb
MPL1-930 1828F-WB-H



Black



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BB	
							3200lm	2500lm	MPL1-9273028F-BB	
							3200lm	2500lm	MPL1-9274528F-BB	
						3000K	3400lm	2700lm	MPL1-9301828F-BB	
							3400lm	2700lm	MPL1-9303028F-BB	
							3400lm	2700lm	MPL1-9304528F-BB	
						4000K	3600lm	2900lm	MPL1-9401828F-BB	
							3600lm	2900lm	MPL1-9403028F-BB	
							3600lm	2900lm	MPL1-9404528F-BB	

25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BG	
						30°	3200lm	2500lm	MPL1-9273028F-BG	
						45°	3200lm	2500lm	MPL1-9274528F-BG	
						3000K	18°	3400lm	2700lm	MPL1-9301828F-BG
							30°	3400lm	2700lm	MPL1-9303028F-BG
							45°	3400lm	2700lm	MPL1-9304528F-BG
						4000K	18°	3600lm	2900lm	MPL1-9401828F-BG
							30°	3600lm	2900lm	MPL1-9403028F-BG
							45°	3600lm	2900lm	MPL1-9404528F-BG

Code Remark: F=(ON-OFF) D=D(DALI Dim)




BREEZE Single




BREEZE Double



BREEZE Triple

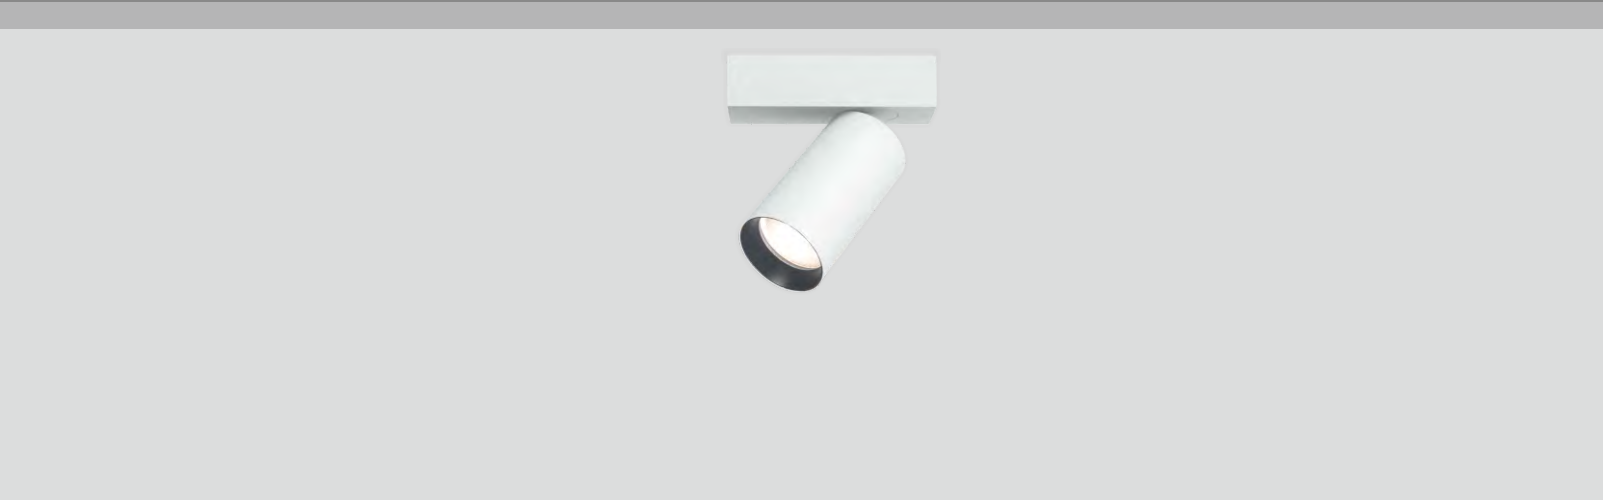

9W	CRI90	2700K	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 YEAR WARRANTY	CE
----	-------	-------	-----	-----------------------------	-------------	------	-----------------------	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB

Code Remark: P=(Phase Dim)


7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB
-----	-----	------	--------	----	-------	-----	-------	-------	------------------

Code Remark: P=(Phase Dim)

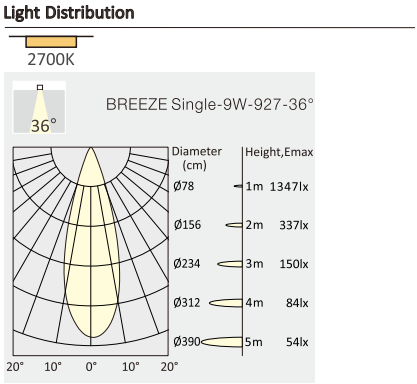

NEKO / BREEZE Double
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW

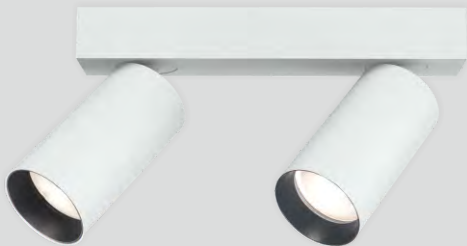

2x9W	CRI90	2700K	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE	
------	-------	-------	-----	-----------------------------	-------------	------	----------------	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB


Code Remark: P=(Phase Dim)



2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB
-------	-------	------	----------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)

Light Distribution

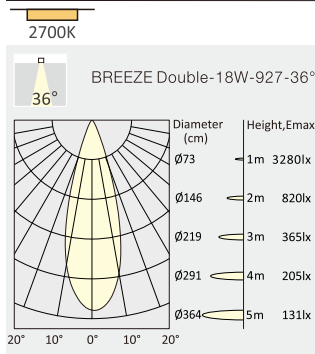

NEKO / BREEZE Triple
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

NEW



3x9W	CRI90	2700K	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 GUARANTEE	CE	
------	-------	-------	-----	-----------------------------	-------------	------	----------------	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB


Code Remark: P=(Phase Dim)



3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB
-------	-------	------	----------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)

Light Distribution

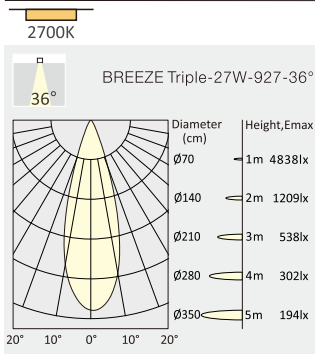



PURE Art-C



PURE S-C


Ceiling Mounted



NEKO / PURE Art-C
Ceiling Mounted PURE Art



11W 15W	CRI90	2700K 3000K 4000K	18° 24° 36°	 50,000h@L80B10	UGR < 10	IP 20		CB	CE
------------	-------	-------------------------	-------------------	--	-------------	-------	--	----	----



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB	
						24°	850lm	640lm	PUAC-9272411F-WB	
						36°	850lm	640lm	PUAC-9273611F-WB	
					3000K	18°	950lm	720lm	PUAC-9301811F-WB	
						24°	950lm	720lm	PUAC-9302411F-WB	
						36°	950lm	720lm	PUAC-9303611F-WB	
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB	
						24°	1050lm	800lm	PUAC-9402411F-WB	
						36°	1050lm	800lm	PUAC-9403611F-WB	
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB	
						24°	1100lm	900lm	PUAC-9272415F-WB	
						36°	1100lm	900lm	PUAC-9273615F-WB	
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB	
						24°	1200lm	950lm	PUAC-9302415F-WB	
						36°	1200lm	950lm	PUAC-9303615F-WB	
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB	
						24°	1300lm	1000lm	PUAC-9402415F-WB	
						36°	1300lm	1000lm	PUAC-9403615F-WB	
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB	
						24°	850lm	640lm	PUAC-9272411F-WB	
						36°	850lm	640lm	PUAC-9273611F-WB	
					3000K	18°	950lm	720lm	PUAC-9301811F-WB	
						24°	950lm	720lm	PUAC-9302411F-WB	
						36°	950lm	720lm	PUAC-9303611F-WB	
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB	
						24°	1050lm	800lm	PUAC-9402411F-WB	
						36°	1050lm	800lm	PUAC-9403611F-WB	
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB	
						24°	1100lm	900lm	PUAC-9272415F-WB	
						36°	1100lm	900lm	PUAC-9273615F-WB	
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB	
						24°	1200lm	950lm	PUAC-9302415F-WB	
						36°	1200lm	950lm	PUAC-9303615F-WB	
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB	
						24°	1300lm	1000lm	PUAC-9402415F-WB	
						36°	1300lm	1000lm	PUAC-9403615F-WB	

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Honeycomb

Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

NEKO / PURE S-C
Ceiling Mounted PURE S



15W 21W	CRI90	2700K 3000K 4000K	15° 25° 30°	 50,000h@L80B10	UGR < 10	IP 20		CB	CE
------------	-------	-------------------------	-------------------	--	-------------	-------	--	----	----

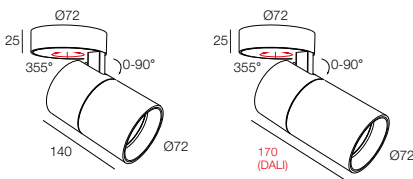

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB	
						25°	1400lm	1100lm	PUSC-9272515F-WB	
						30°	1400lm	1100lm	PUSC-9273015F-WB	
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB	
						25°	1500lm	1200lm	PUSC-9302515F-WB	
						30°	1500lm	1200lm	PUSC-9303015F-WB	
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB	
						25°	1600lm	1300lm	PUSC-9402515F-WB	
						30°	1600lm	1300lm	PUSC-9403015F-WB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB	
						25°	1900lm	1500lm	PUSC-9272521F-WB	
						30°	1900lm	1500lm	PUSC-9273021F-WB	
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB	
						25°	2000lm	1600lm	PUSC-9302521F-WB	
						30°	2000lm	1600lm	PUSC-9303021F-WB	
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB	
						25°	2100lm	1700lm	PUSC-9402521F-WB	
						30°	2100lm	1700lm	PUSC-9403021F-WB	
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-BB	
						25°	1400lm	1100lm	PUSC-9272515F-BB	
						30°	1400lm	1100lm	PUSC-9273015F-BB	
					3000K	15°	1500lm	1200lm	PUSC-9301515F-BB	
						25°	1500lm	1200lm	PUSC-9302515F-BB	
						30°	1500lm	1200lm	PUSC-9303015F-BB	
					4000K	15°	1600lm	1300lm	PUSC-9401515F-BB	
						25°	1600lm	1300lm	PUSC-9402515F-BB	
						30°	1600lm	1300lm	PUSC-9403015F-BB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-BB	
						25°	1900lm	1500lm	PUSC-9272521F-BB	
						30°	1900lm	1500lm	PUSC-9273021F-BB	
					3000K	15°	2000lm	1600lm	PUSC-9301521F-BB	
						25°	2000lm	1600lm	PUSC-9302521F-BB	
						30°	2000lm	1600lm	PUSC-9303021F-BB	
					4000K	15°	2100lm	1700lm	PUSC-9401521F-BB	
						25°	2100lm	1700lm	PUSC-9402521F-BB	
						30°	2100lm	1700lm	PUSC-9403021F-BB	

Code Remark: F=(ON-OFF) P=(Phase Dim) D=(DALI Dim)

Optional accessory



Honeycomb

Code for PUSC-9302515F-WB with Honeycomb
PUSC-9302515F-WB-H






PURE

PURE Art	PURE S	PURE M
15W 950-1000lm	15W 1200-1300lm 21W 1600-1700lm	28W 2700-2900lm

Narrow, medium and wide beam angles are available for different lighting applications

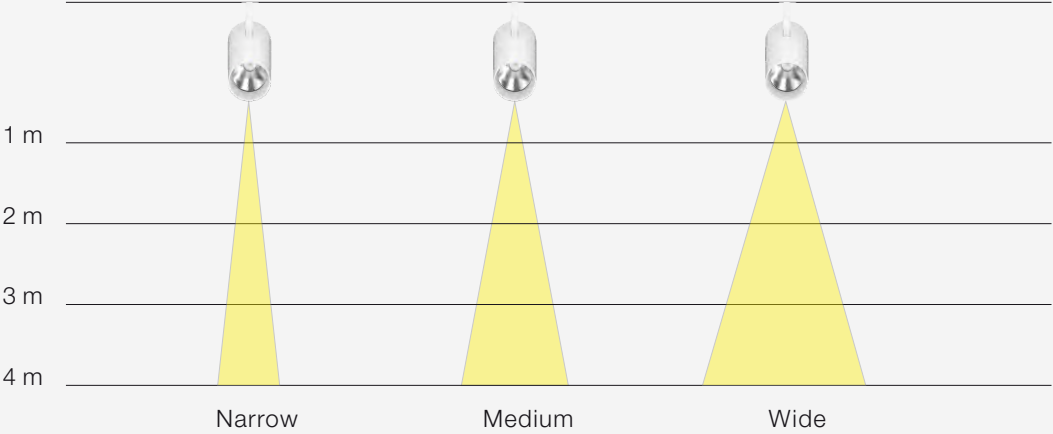


NEKO / PURE Art
LED Tracklight

Project: VALO Hotel Helsinki, Finland



15W	CRI90	2700K 3000K 4000K	18° 24° 36°	 50,000h L80B10	UGR < 19	IP 20		CB	CE
-----	-------	-------------------------	-------------------	--	-------------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-WB
						24°	1100lm	900lm	PUA2- 9272415F-WB
						36°	1100lm	900lm	PUA2- 9273615F-WB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-WB
						24°	1200lm	950lm	PUA2- 9302415F-WB
						36°	1200lm	950lm	PUA2- 9303615F-WB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-WB
						24°	1300lm	1000lm	PUA2- 9402415F-WB
						36°	1300lm	1000lm	PUA2- 9403615F-WB

13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-BB
						24°	1100lm	900lm	PUA2- 9272415F-BB
						36°	1100lm	900lm	PUA2- 9273615F-BB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-BB
						24°	1200lm	950lm	PUA2- 9302415F-BB
						36°	1200lm	950lm	PUA2- 9303615F-BB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-BB
						24°	1300lm	1000lm	PUA2- 9402415F-BB
						36°	1300lm	1000lm	PUA2- 9403615F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for PUA2-930 1815F-WB with Honeycomb
PUA2-930 1815F-WB-H

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System



NEKO / PURE S
LED Tracklight



21W 15W	CRI90	2700K 3000K 4000K	15° 25° 30°	 50,000h@L80B10	UGR < 19	IP 20		CB	CE
------------	-------	-------------------------	-------------------	--	-------------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515F-WB
						25°	1400lm	1100lm	PUS1-9272515F-WB
						30°	1400lm	1100lm	PUS1-9273015F-WB
						3000K 15°	1500lm	1200lm	PUS1-9301515F-WB
						25°	1500lm	1200lm	PUS1-9302515F-WB
						30°	1500lm	1200lm	PUS1-9303015F-WB
						3000K 15°	1600lm	1300lm	PUS1-9401515F-WB
						25°	1600lm	1300lm	PUS1-9402515F-WB
						30°	1600lm	1300lm	PUS1-9403015F-WB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521F-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1400lm	1100lm	PUS1-9272515F-BB
						30°	1400lm	1100lm	PUS1-9273015F-BB
						3000K 15°	1500lm	1200lm	PUS1-9301515F-BB
						25°	1500lm	1200lm	PUS1-9302515F-BB
						30°	1500lm	1200lm	PUS1-9303015F-BB
						3000K 15°	1600lm	1300lm	PUS1-9401515F-BB
						25°	1600lm	1300lm	PUS1-9402515F-BB
						30°	1600lm	1300lm	PUS1-9403015F-BB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521F-BB
						30°	1900lm	1500lm	PUS2-9272521F-BB
18 W	21 W	36 V	500 mA	90	2700K	30°	1900lm	1500lm	PUS2-9273021F-BB
						3000K 15°	2000lm	1600lm	PUS2-9301521F-WB
						25°	2000lm	1600lm	PUS2-9302521F-WB
						30°	2000lm	1600lm	PUS2-9303021F-WB
						4000K 15°	2100lm	1700lm	PUS2-9401521F-WB
						25°	2100lm	1700lm	PUS2-9402521F-WB
						30°	2100lm	1700lm	PUS2-9403021F-WB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521F-BB
						30°	1900lm	1500lm	PUS2-9272521F-BB
						30°	1900lm	1500lm	PUS2-9273021F-BB
						3000K 15°	2000lm	1600lm	PUS2-9301521F-BB
						25°	2000lm	1600lm	PUS2-9302521F-BB
						30°	2000lm	1600lm	PUS2-9303021F-BB
						4000K 15°	2100lm	1700lm	PUS2-9401521F-BB
						25°	2100lm	1700lm	PUS2-9402521F-BB
						30°	2100lm	1700lm	PUS2-9403021F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory




Code for PUS1-930 1515F-WB with Honeycomb
PUS1-930 1515F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

21W 15W	CRI90	2700K 3000K 4000K	15° 25° 30°	 50,000h@L80B10	GLOBAL 3	UGR < 19	IP 20	DALI		CB	CE
------------	-------	-------------------------	-------------------	---	----------	-------------	-------	------	---	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB
						25°	1400lm	1100lm	PUS1-9272515D-WB
						30°	1400lm	1100lm	PUS1-9273015D-WB
						3000K 15°	1500lm	1200lm	PUS1-9301515D-WB
						25°	1500lm	1200lm	PUS1-9302515D-WB
						30°	1500lm	1200lm	PUS1-9303015D-WB
						4000K 15°	1600lm	1300lm	PUS1-9401515D-WB
						25°	1600lm	1300lm	PUS1-9402515D-WB
						30°	1600lm	1300lm	PUS1-9403015D-WB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521D-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1400lm	1100lm	PUS1-9272515D-BB
						30°	1400lm	1100lm	PUS1-9273015D-BB
						3000K 15°	1500lm	1200lm	PUS1-9301515D-BB
						25°	1500lm	1200lm	PUS1-9302515D-BB
						30°	1500lm	1200lm	PUS1-9303015D-BB
						4000K 15°	1600lm	1300lm	PUS1-9401515D-BB
						25°	1600lm	1300lm	PUS1-9402515D-BB
						30°	1600lm	1300lm	PUS1-9403015D-BB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521D-BB
						30°	1900lm	1500lm	PUS2-9272521D-BB
18 W	21 W	36 V	500 mA	90	2700K	30°	1900lm	1500lm	PUS2-9273021D-BB
						3000K 15°	2000lm	1600lm	PUS2-9301521D-BB
						25°	2000lm	1600lm	PUS2-9302521D-BB
						30°	2000lm	1600lm	PUS2-9303021D-BB
						4000K 15°	2100lm	1700lm	PUS2-9401521D-BB
						25°	2100lm	1700lm	PUS2-9402521D-BB
						30°	2100lm	1700lm	PUS2-9403021D-BB
						18 W	21 W	36 V	500 mA
						90	2700K	15°	1900lm
						25°	1900lm	1500lm	PUS2-9271521D-BB
						30°	1900lm	1500lm	PUS2-9272521D-BB
						30°	1900lm	1500lm	PUS2-9273021D-BB
						3000K 15°	2000lm	1600lm	PUS2-9301521D-BB
						25°	2000lm	1600lm	PUS2-9302521D-BB
						30°	2000lm	1600lm	PUS2-9303021D-BB
						4000K 15°	2100lm	1700lm	PUS2-9401521D-BB
						25°	2100lm	1700lm	PUS2-9402521D-BB
						30°	2100lm	1700lm	PUS2-9403021D-BB

Code Remark: D=(DALI Dim)

Optional accessory




Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System ,

NEKO / PURE M
LED Tracklight



28W	CRI90	2700K 3000K 4000K	18° 30° 45°	CITIZEN 50,000h@L80B10	UGR < 19	IP 20		CB	CE
-----	-------	-------------------------	-------------------	---	-------------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828F-WB
						30°	3200lm	2500lm	PUM1- 9273028F-WB
						45°	3200lm	2500lm	PUM1- 9274528F-WB
						3000K 18°	3400lm	2700lm	PUM1- 9301828F-WB
						30°	3400lm	2700lm	PUM1- 9303028F-WB
						45°	3400lm	2700lm	PUM1- 9304528F-WB
						4000K 18°	3600lm	2900lm	PUM1- 9401828F-WB
						30°	3600lm	2900lm	PUM1- 9403028F-WB
						45°	3600lm	2900lm	PUM1- 9404528F-WB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb


Code for PUM1-930 1828F-WB with Honeycomb
PUM1-930 1828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

28W	CRI90	2700K 3000K 4000K	18° 30° 45°	CITIZEN 50,000h@L80B10	GLOBAL	UGR < 19	IP 20	DALI		CB	CE
-----	-------	-------------------------	-------------------	---	--------	-------------	-------	------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-WB
						30°	3200lm	2500lm	PUM1- 9273028D-WB
						45°	3200lm	2500lm	PUM1- 9274528D-WB
						3000K 18°	3400lm	2700lm	PUM1- 9301828D-WB
						30°	3400lm	2700lm	PUM1- 9303028D-WB
						45°	3400lm	2700lm	PUM1- 9304528D-WB
						4000K 18°	3600lm	2900lm	PUM1- 9401828D-WB
						30°	3600lm	2900lm	PUM1- 9403028D-WB
						45°	3600lm	2900lm	PUM1- 9404528D-WB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System ,

NEKO / ROXY
In-track Driver LED Tracklight



ROXY Art
15W 950lm-1000lm

ROXY S
15W 1200lm-1300lm
21W 1600lm-1700lm

ROXY K
28W 2400lm-2600lm




On-Off Version

DALI Dim Version




15W	CRI90	2700K 3000K 4000K	18° 24° 36° 50°		UGR < 19	IP 20		CB	CE
-----	-------	-------------------------	--------------------------	--	----------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272515F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
					3000K	18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302515F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9306015F-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402515F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-BB
						24°	1200lm	900lm	ROA1-9272515F-BB
						36°	1200lm	900lm	ROA1-9273615F-BB
						50°	1200lm	900lm	ROA1-9275015F-BB
					3000K	18°	1300lm	950lm	ROA1-9301815F-BB
						24°	1300lm	950lm	ROA1-9302515F-BB
						36°	1300lm	950lm	ROA1-9303615F-BB
						50°	1300lm	950lm	ROA1-9306015F-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-BB
						24°	1400lm	1000lm	ROA1-9402515F-BB
						36°	1400lm	1000lm	ROA1-9403615F-BB
						50°	1400lm	1000lm	ROA1-9405015F-BB

Code Remark: F=(ON-OFF)

15W	CRI90	2700K 3000K 4000K	18° 24° 36° 50°		UGR < 19	IP 20		CB	CE	
-----	-------	-------------------------	--------------------------	--	----------	-------	--	----	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272515D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
					3000K	18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302515D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9306015D-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402515D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-BB
						24°	1200lm	900lm	ROA1-9272515D-BB
						36°	1200lm	900lm	ROA1-9273615D-BB
						50°	1200lm	900lm	ROA1-9275015D-BB
					3000K	18°	1300lm	950lm	ROA1-9301815D-BB
						24°	1300lm	950lm	ROA1-9302515D-BB
						36°	1300lm	950lm	ROA1-9303615D-BB
						50°	1300lm	950lm	ROA1-9306015D-BB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-BB
						24°	1400lm	1000lm	ROA1-9402515D-BB
						36°	1400lm	1000lm	ROA1-9403615D-BB
						50°	1400lm	1000lm	ROA1-9405015D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROA1-930 1815D-WB with Honeycomb
ROA1-930 1815D-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY S
Standard Shop Lighting
In-track Driver LED Tracklight

On-Off Version




Table with specifications for On-Off Version: 15W/21W, CRI90, 2700K/3000K/4000K, 15°/30°/50°, CITIZEN, UGR < 19, IP 20, 5 YEARS GUARANTEE, CB, CE.

Main table for On-Off Version listing LED Power, System Power, LED Voltage, LED Current, CRI, CCT, Beam, LED Output, System Output, and Code for various configurations.

Code Remark: F=(ON-OFF)

DALI Dim Version




Table with specifications for DALI Dim Version: 15W/21W, CRI90, 2700K/3000K/4000K, 15°/30°/50°, CITIZEN, UGR < 19, IP 20, 5 YEARS GUARANTEE, CB, CE, DALI 2.

Main table for DALI Dim Version listing LED Power, System Power, LED Voltage, LED Current, CRI, CCT, Beam, LED Output, System Output, and Code for various configurations.

Code Remark: D=(DALI Dim)

Optional accessory



Code for ROS1-9302515D-WB with Honeycomb
ROS1-9302515D-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System



NEKO / ROXY K

High Height Ceiling Shop Lighting

In-track Driver LED Tracklight

On-Off Version

DALI Dim Version



28W

CRI90

2700K
3000K
4000K

20°
35°
55°

CITIZEN
LED CHIPS

UGR
< 19

IP 20

5 YEARS
GUARANTEE

CB

CE

28W

CRI90

2700K
3000K
4000K

20°
35°
55°

CITIZEN
LED CHIPS

UGR
< 19

IP 20

5 YEARS
GUARANTEE

CB

CE

DALI 2



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
					3000K	20°	2700lm	2200lm	ROK1-9302028F-WB
						35°	2700lm	2400lm	ROK1-9303528F-WB
						55°	2700lm	2400lm	ROK1-9305528F-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-WB
						35°	2900lm	2600lm	ROK1-9403528F-WB
						55°	2900lm	2600lm	ROK1-9405528F-WB



25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-BB
						35°	2500lm	2200lm	ROK1-9273528F-BB
						55°	2500lm	2200lm	ROK1-9275528F-BB
					3000K	20°	2700lm	2200lm	ROK1-9302028F-BB
						35°	2700lm	2400lm	ROK1-9303528F-BB
						55°	2700lm	2400lm	ROK1-9305528F-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-BB
						35°	2900lm	2600lm	ROK1-9403528F-BB
						55°	2900lm	2600lm	ROK1-9405528F-BB

Code Remark: F=(ON-OFF)



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
					3000K	20°	2700lm	2200lm	ROK1-9302028D-WB
						35°	2700lm	2400lm	ROK1-9303528D-WB
						55°	2700lm	2400lm	ROK1-9305528D-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-WB
						35°	2900lm	2600lm	ROK1-9403528D-WB
						55°	2900lm	2600lm	ROK1-9405528D-WB



25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-BB
						35°	2500lm	2200lm	ROK1-9273528D-BB
						55°	2500lm	2200lm	ROK1-9275528D-BB
					3000K	20°	2700lm	2200lm	ROK1-9302028D-BB
						35°	2700lm	2400lm	ROK1-9303528D-BB
						55°	2700lm	2400lm	ROK1-9305528D-BB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-BB
						35°	2900lm	2600lm	ROK1-9403528D-BB
						55°	2900lm	2600lm	ROK1-9405528D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY-Z
In-track Driver LED Tracklight
Beam Angle Zooming Version



NEKO / ROXY Art-Z

In-track Driver LED Tracklight

Beam Angle Zooming Version



NEKO / ROXY S-Z

In-track Driver LED Tracklight

Beam Angle Zooming Version





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB					
							1300lm	1100lm	ROA1-930Z315F-WB					
							1400lm	1200lm	ROA1-940Z315F-WB					
					35°~60°	1200lm	950lm	ROA1-927Z615F-WB						
						1300lm	1000lm	ROA1-930Z615F-WB						
						1400lm	1100lm	ROA1-940Z615F-WB						

					13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-BB
												1300lm	1100lm	ROA1-930Z315F-BB
												1400lm	1200lm	ROA1-940Z315F-BB
										35°~60°	1200lm	950lm	ROA1-927Z615F-BB	
											1300lm	1000lm	ROA1-930Z615F-BB	
1400lm	1100lm	ROA1-940Z615F-BB												

Code Remark: F=(ON-OFF) D=(DALI Dim)



Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Code for ROA1-930 Z315F-WB with Honeycomb
ROA1-930 Z315F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB					
							1500lm	1300lm	ROS1-930Z315F-WB					
							1600lm	1400lm	ROS1-940Z315F-WB					
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB					
							1500lm	1200lm	ROS1-930Z615F-WB					
							1600lm	1300lm	ROS1-940Z615F-WB					
					18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-WB
												2000lm	1700lm	ROS2-930Z321F-WB
												2100lm	1800lm	ROS2-940Z321F-WB
										2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-WB
												2000lm	1600lm	ROS2-930Z621F-WB
												2100lm	1700lm	ROS2-940Z621F-WB
13 W	15 W	36 V	350 mA	90						2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-BB
												1500lm	1300lm	ROS1-930Z315F-BB
												1600lm	1400lm	ROS1-940Z315F-BB
										2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-BB
												1500lm	1200lm	ROS1-930Z615F-BB
												1600lm	1300lm	ROS1-940Z615F-BB
					18 W	21 W	36 V	500 mA	90	2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-BB
												2000lm	1700lm	ROS2-930Z321F-BB
												2100lm	1800lm	ROS2-940Z321F-BB
										2700K	35°~60°	1900lm	1500lm	ROS2-927Z621F-BB
												2000lm	1600lm	ROS2-930Z621F-BB
												2100lm	1700lm	ROS2-940Z621F-BB

Code Remark: F=(ON-OFF) D=(DALI Dim)

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Code for ROS1-930 Z315F-WB with Honeycomb
ROS1-930 Z315F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

NEKO / INLINE
Single Phase LED Tracklight System

! NEW

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver



INLINE ST-11W



INLINE SP-8W

NEKO / INLINE
Single Phase LED Tracklight System

! NEW


Incl. Phase Dim Driver
Direct Connection 230V – No External Driver




INLINE ST-11W
11W, 36°, 700lm at CRI>90 2700K



INLINE SP-8W
8W, 36°, 500lm at CRI>90 2700K



11W	CRI90	2700K	36°	CITIZEN 50,000h@L80B50	UGR < 19	IP20	5 GUARANTEE	CE
-----	-------	-------	-----	--	----------	------	---	----



8W	CRI90	2700K	36°	CITIZEN 50,000h@L80B50	UGR < 19	IP20	5 GUARANTEE	CE
----	-------	-------	-----	--	----------	------	---	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611 P -WB

Code Remark: **P**=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611 P -BB
-----	------	------	--------	----	-------	-----	-------	-------	---------------------------


Code Remark: **P**=(Phase Dim)

Track System



Compatible with NEKO INLINE Single Circuit Track System

Light Distribution

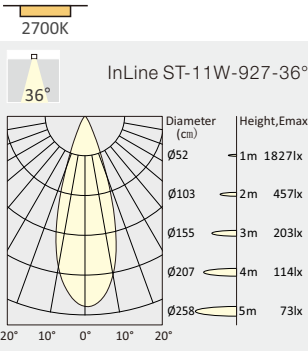


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608 P -WB

Code Remark: **P**=(Phase Dim)

6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608 P -BB
-----	-----	------	--------	----	-------	-----	-------	-------	---------------------------


Code Remark: **P**=(Phase Dim)


Track System



Compatible with NEKO INLINE Single Circuit Track System

Light Distribution





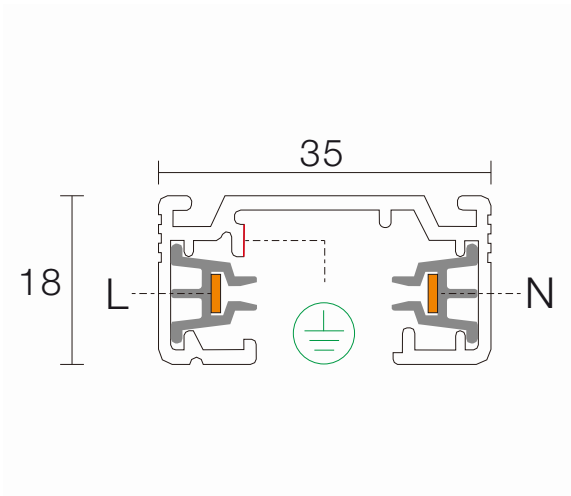





Quick Info

- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available for building comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted

Load of Track



Connection Diagram

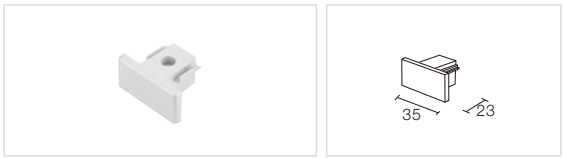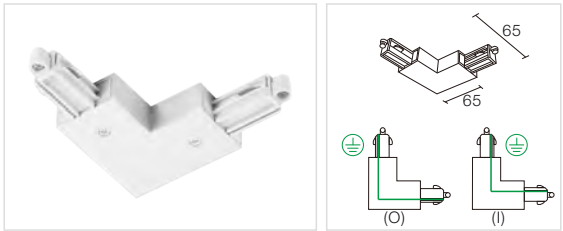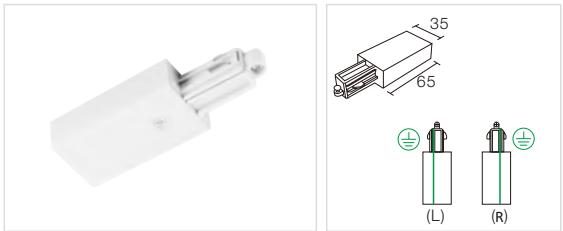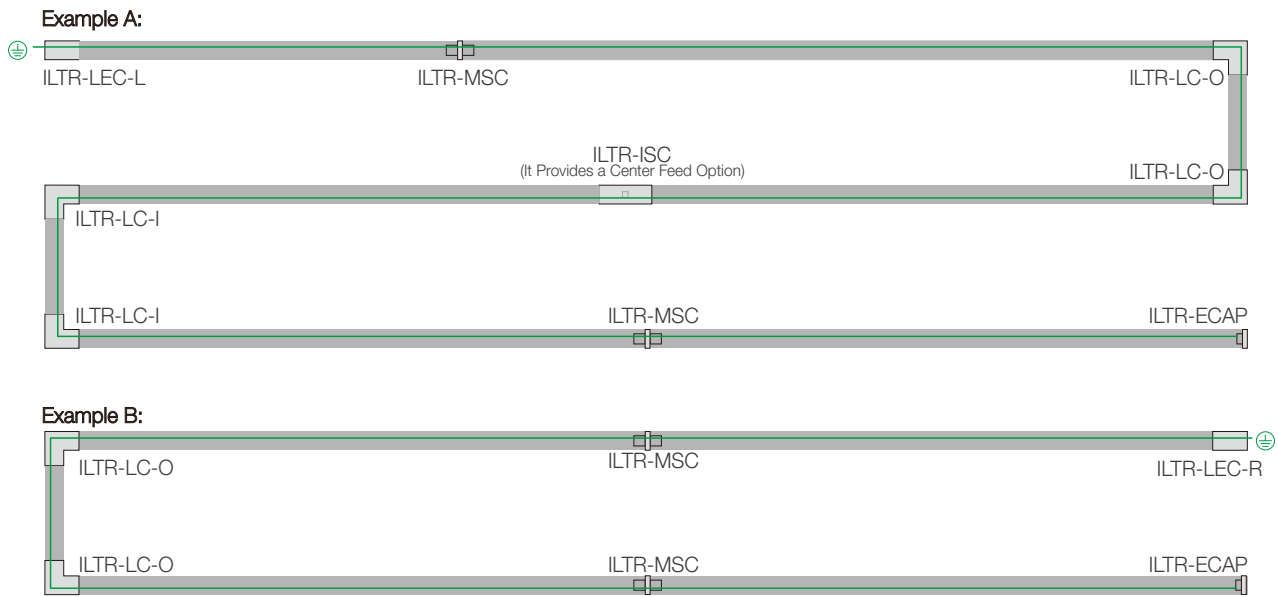

INLINE Single Phase Track

Description	Code/Model
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-B
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B

Live End Connector

Description	Code/Model
Live End Connector, Left, White	ILTR-LEC-L-W
Live End Connector, Left, Black	ILTR-LEC-L-B
Live End Connector, Right, White	ILTR-LEC-R-W
Live End Connector, Right, Black	ILTR-LEC-R-B

I Straight Connector

Description	Code/Model
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B

L Connector

Description	Code/Model
L Connector, Outer, White	ILTR-LC-O-W
L Connector, Outer, Black	ILTR-LC-O-B
L Connector, Inner, White	ILTR-LC-I-W
L Connector, Inner, Black	ILTR-LC-I-B

Mini Straight Connector

Description	Code/Model
Mini Straight Connector, White	ILTR-MSC-W
Mini Straight Connector, Black	ILTR-MSC-B

Endcap

Description	Code/Model
Endcap, White	ILTR-ECAP-W
Endcap, Black	ILTR-ECAP-B



Small KOI SKOI-5W



Large KOI LKOI-18W

No Visible Screws
Slim Architectural Design
Incl. Phase Dim Driver



5W	CRi90	3000K		ZIGEN 50,000h@L80B10	IP20		CE	
----	-------	-------	--	-------------------------	------	--	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	450lm	SKOI-930UD05F-WW

Code Remark: F=(ON-OFF)



5 W	7 W	9 V	500 mA	90	3000K	Up&Down	600lm	280lm	SKOI-930UD05F-BB
-----	-----	-----	--------	----	-------	---------	-------	-------	------------------

Code Remark: F=(ON-OFF)

9W	CRi90	2000K-3000K Dim to Warm		ZIGEN 50,000h@L80B10	IP20		CE	
----	-------	----------------------------	--	-------------------------	------	--	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	650lm	SKOI-9D3UD09P-WW

Code Remark: P=(Phase Dim)



9 W	11 W	36 V	250 mA	90	2000K-3000K	Up&Down	950lm	400lm	SKOI-9D3UD09P-BB
-----	------	------	--------	----	-------------	---------	-------	-------	------------------

Code Remark: P=(Phase Dim)



NEKO / Large KOI
LED Wall Light

NEW



18W

CRI90

3000K




ZIGEN

50,000h@L80B10

IP20



CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1900lm	LKOI-930UD18P-WW

Code Remark: P=(Phase Dim)



18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1300lm	LKOI-930UD18P-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)







www.nekolighting.com

EXTERIOR RANGE



NEKO / SEAPOINT
EXTERIOR LED Downlight





LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	25°	450lm	SEAPPOINT-830-25°	SEAP-8302506F-BN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K






10W	CR190	3000K	36°		UGR < 19			
				50,000h L80B10				



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	3000K	36°	1000lm	850lm	SSRC-9303610F-BN

Code Remark: F=F(ON-OFF)


Light Distribution

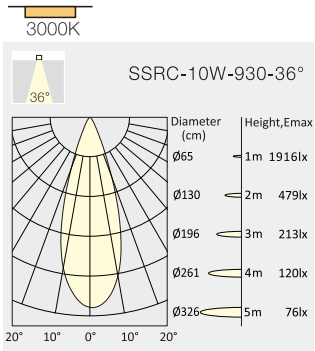

NEKO / CARMEL
LED Ceiling Light



6W CRI80 3000K 55° IP54 IK07 EDISON 50,000h@L80B10 CE 3 Body: Aluminum Color: Dark-Grey



CARMEL Round

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver




CARMEL Square

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL S-830-55°	CARS-8305506F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K

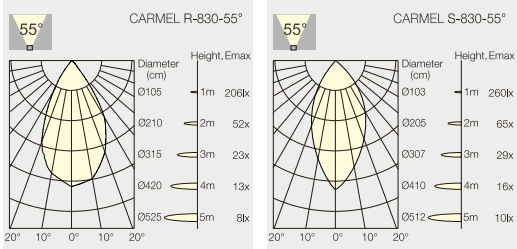

NEKO / CLIFTON
LED Ceiling Light




25W	CRI80	3000K	110°	IP54	IK10	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	--	---	---	------------------------------------



LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
22 W	25 W	220-240 VAC	80	3000K	110°	2350lm	CLIFTON-830-110°	CLIF-830A125F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

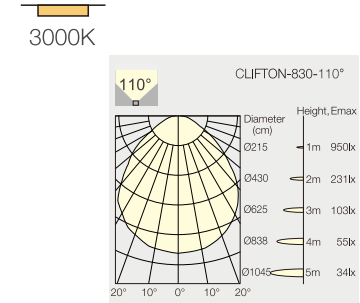

NEKO / CAMPSBAY
LED Wall Light




CAMPSBAY Single



CAMPSBAY Double

6W 12W	CRI80	3000K	45°	IP65	IK07	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----------	-------	-------	-----	------	------	---	--	--	------------------------------------



CAMPSBAY Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN

Remark: With internal Non-Dimmable LED driver



CAMPSBAY Double


10 W	12 W	220-240 VAC	80	3000K	45°	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN
------	------	-------------	----	-------	-----	--------	-------------------------	------------------

Remark: With internal Non-Dimmable LED driver


Light Distribution



3000K

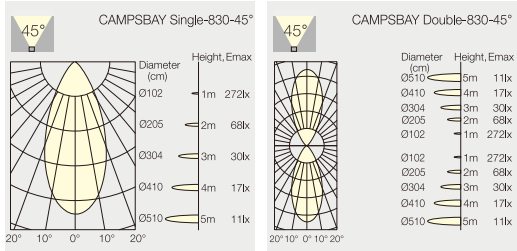

NEKO / LAGOON
LED Wall Light



11W	CRI80	3000K	100°	IP65	IK07	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	---	--	--	------------------------------------


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	100°	950lm	LAGOON-830-100°	LAG-830A011F-DN

Remark: With internal Non-Dimmable LED driver




Light Distribution

3000K



NEKO / BAY
LED Wall Light



8W	CRI80	3000K	90°	IP65	IK07	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
----	-------	-------	-----	------	------	--	--	--	------------------------------------




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	90 °	430lm	BAY-830-90°	BAY-8309008F-DN


Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / ASCONA
LED Wall Light



10W	CRI80	3000K	110°	IP65	IK10	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	--	--	--	------------------------------------





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	80	3000K	110°	630lm	ASCONA-830-110°	ASCO-830A110F-DN

Remark: With internal Non-Dimmable LED driver


Light Distribution

3000K



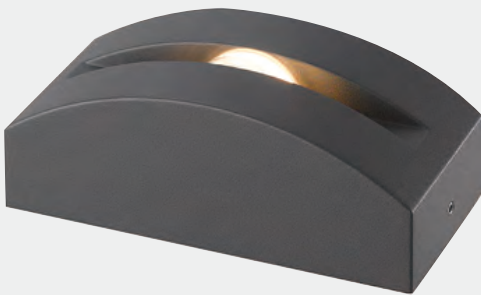


6W	CR180	3000K	3°	IP65	IK10	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
----	-------	-------	----	------	------	---	--	--	------------------------------------




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4 W	6 W	220-240 VAC	80	3000K	3°	280lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver




Light Distribution

3000K



Ceiling / windows frame mounted light
Ideally lighting up the frame of doors, windows, corridors, etc
With its self-balancing system making the un-even surface a proper lighting effect

NEKO / Capetown-Recessed
Recessed LED Step Light

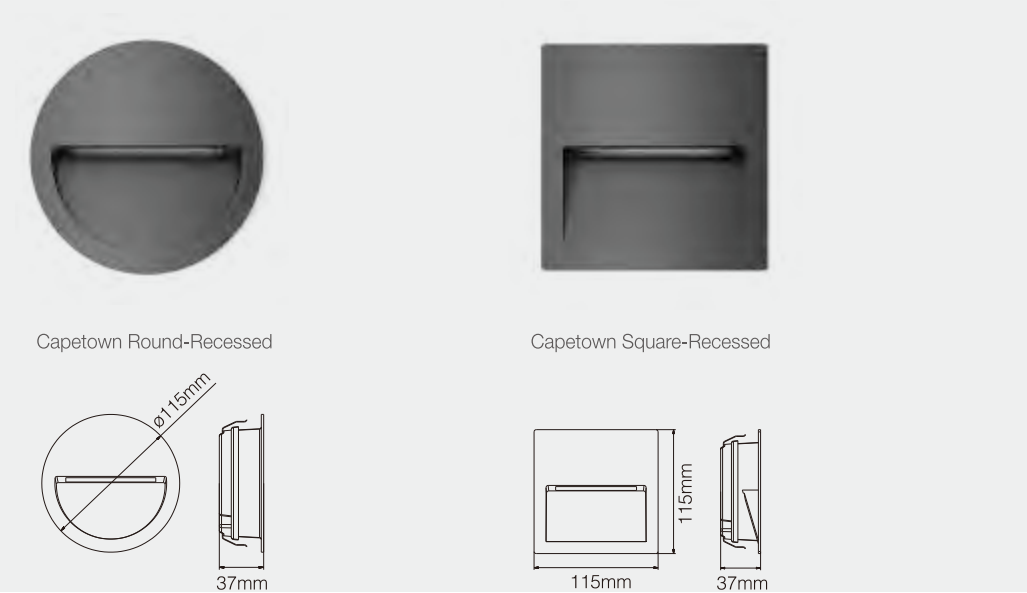

4.5W

CRI80

3000K

65°

IP65

IK07

50,000h@L80B10

Body: Aluminum
Color: Dark-Grey

Round-Mounting Box

Square-Mounting Box


LED	Power	System Power	Input	Outout	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN	
Remark: With internal Non-Dimmable LED driver										



Capetown Round-Recessed



Capetown Square-Recessed

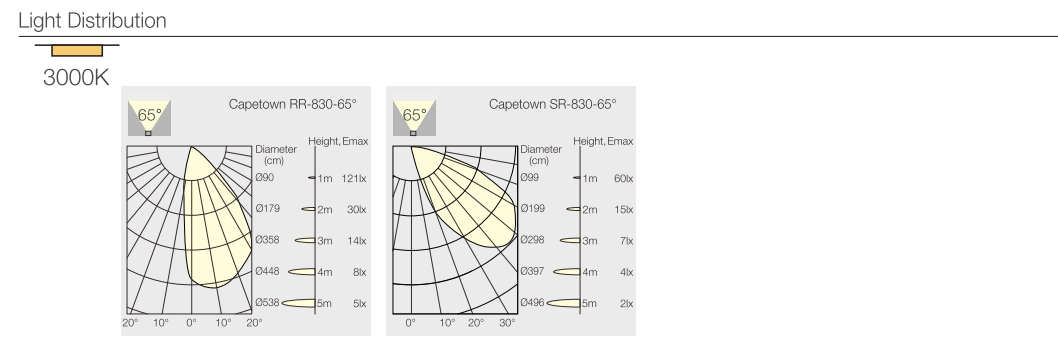


NEKO / Capetown-Surface
LED Step Light



Capetown Round-Surface



Capetown Square-Surface

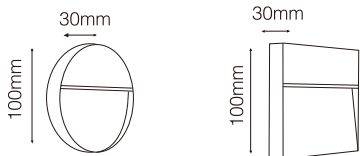

Capetown Round-Surface Capetown Square-Surface

4.5W	CRI80	3000K	65°	IP65	IK07	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
------	-------	-------	-----	------	------	--	--	--	------------------------------------



Capetown Round-Surface

LED Power	SystemrPowe	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4,5 W	220-240 VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN

Remark: With internal Non-Dimmable LED driver



Capetown Square-Surface



3 W	4,5 W	220-240 VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN
-----	-------	-------------	----	-------	-----	-------	---------------------	------------------

Remark: With internal Non-Dimmable LED driver



Light Distribution



3000K



NEKO / CALIFORNIA
LED Garden Lamp

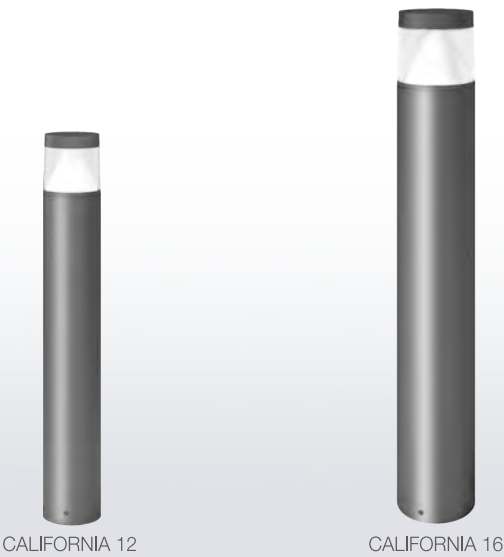

13W 19W	CRI80	3000K	IP65	IK10	 50,000h L80B10			Body: Aluminum Color: Dark-Grey
------------	-------	-------	------	------	--	---	---	------------------------------------

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
11 W	13 W	220-240 VAC	80	3000K	660lm	CALIFORNIA 12-830	CA12-830C613F-DN

Remark: With internal Non-Dimmable LED driver



CALIFORNIA 12

17 W	19 W	220-240 VAC	80	3000K	1220lm	CALIFORNIA 16-830	CA16-830C619F-DN
------	------	-------------	----	-------	--------	-------------------	------------------

Remark: With internal Non-Dimmable LED driver






CALIFORNIA 16

Light Distribution



3000K

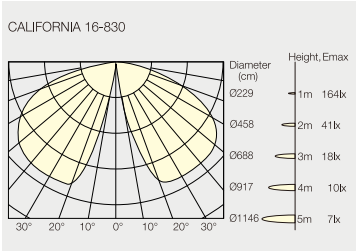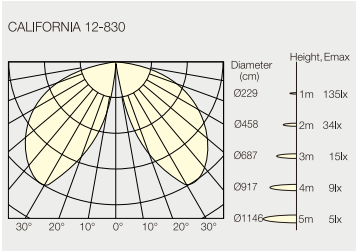

Light Emission 360°



NEKO / DURBAN
LED Garden Lamp






6W	CRI80	3000K	IP65	IK07	CREE 50,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey
----	-------	-------	------	------	------------------------	----	------------------------------------

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	450lm	DURBAN-830	DURB-830B706F-DN


Remark: With internal Non-Dimmable LED driver



Light Distribution

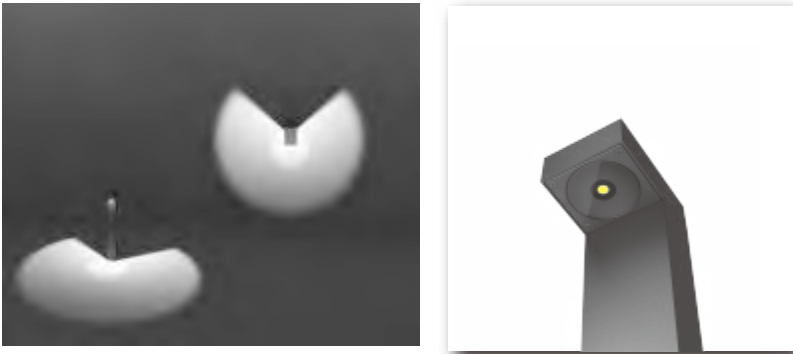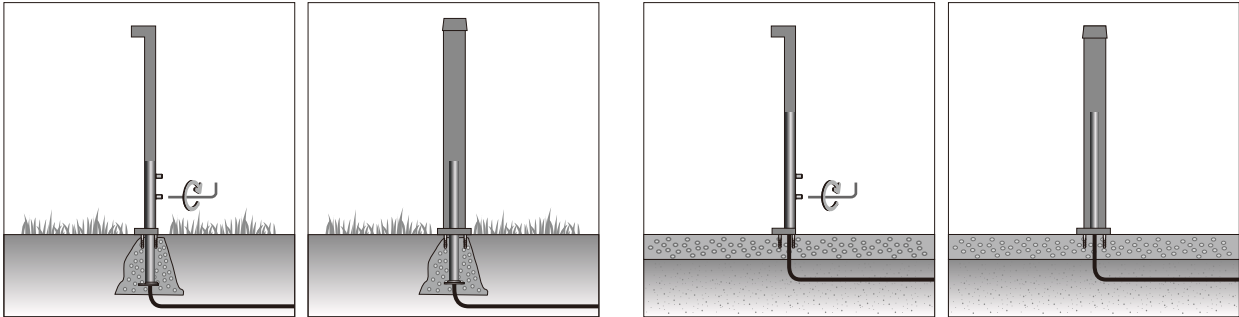

NEKO / TERARACE Micro
Recessed Ground Light



1.5W	CRI80	3000K	18° 40° 65°	IP67	IK10	OSRAM 50,000h@L80B10	CE		Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
------	-------	-------	-------------------	------	------	-------------------------	----	--	--



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1 W	1,5 W	24 V	80	3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
				3000K	40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
				3000K	65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube




Light Distribution

3000K

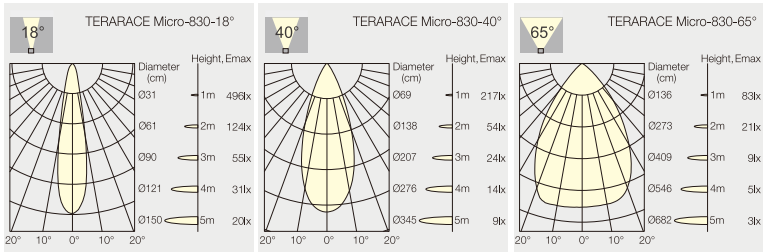

NEKO / TERARACE Nano
Recessed Ground Light



2W	CRI80	3000K	18° 35° 60°	IP67	IK10	OSRAM 50,000h@L80B10	CE		Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
----	-------	-------	-------------------	------	------	-------------------------	----	--	--



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1,6 W	2 W	24 V	80	3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
				3000K	35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
				3000K	60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube




Light Distribution

3000K

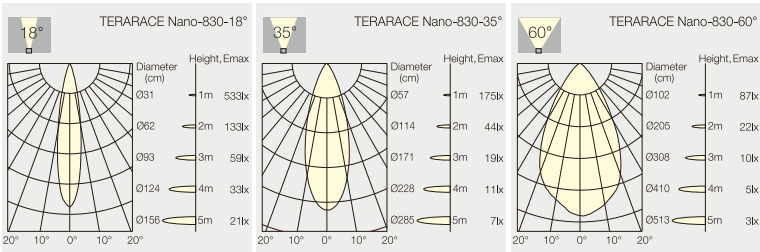

NEKO / TERARACE Mini
Recessed Ground Light



5.5W	CRI80	3000K	30° 45°	IP67	IK10	 50,000h@L80B10			Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
------	-------	-------	------------	------	------	---	---	---	--




Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
				3000K	45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube




Light Distribution

3000K

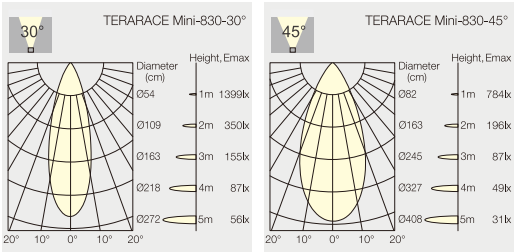

NEKO / TERARACE Maxi
Recessed Ground Light



10W	CRI80	3000K	20° 30° 50°	IP67	IK10	 50,000h@L80B10			Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
-----	-------	-------	-------------------	------	------	---	---	---	--




Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
				3000K	30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
				3000K	50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube





Light Distribution

3000K

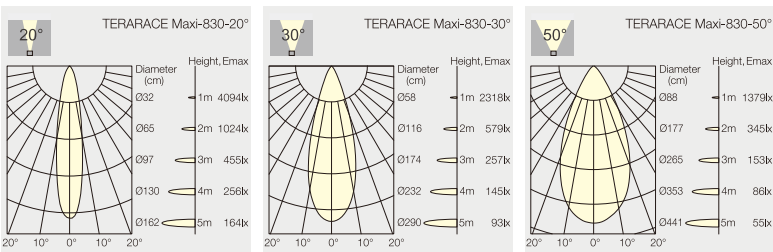

NEKO / AFTER7 Mini
Projector Light



5.5W	CRI80	3000K	30° 45°	IP67	IK10	 50,000h@L80B10	 	Body: Aluminum Color: Dark-Grey	 48 65	 102 Ø40
------	-------	-------	------------	------	------	---	---	------------------------------------	--	---



Cable in 3 meters



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
				3000K	45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN
Remark: External 24VDC LED driver is required (Non-Dimmable)								

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
				3000K	45°	500lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H
Remark: External 24VDC LED driver is required (Non-Dimmable)								


Accessory: Stake for AFTER7 series projectors



Light Distribution





3000K

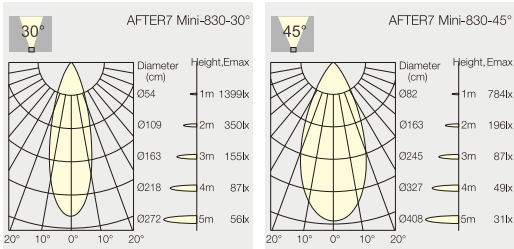

NEKO / AFTER7 Maxi
Projector Light



10W	CRI80	3000K	20° 30° 50°	IP67	IK10	 50,000h@L80B10	 	Body: Aluminum Color: Dark-Grey	 76 109	 124 Ø68
-----	-------	-------	-------------------	------	------	---	---	------------------------------------	--	---



Cable in 3 meters



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
				3000K	30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
				3000K	50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN
Remark: External 24VDC LED driver is required (Non-Dimmable)								

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN-H
				3000K	30°	850lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN-H
				3000K	50°	850lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN-H
Remark: External 24VDC LED driver is required (Non-Dimmable)								


Accessory: Stake for AFTER7 series projectors



Light Distribution



3000K

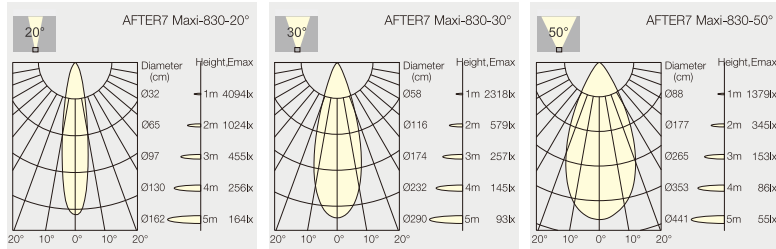

NEKO / PORTOFINO

Projector Light




	LED	Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
	3 W	4 W	220-240 VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN	

	Remark: With internal Non-Dimmable LED driver									
Cable in 1.5 meters										
	9 W	11 W	220-240 VAC	80	3000K	20°	900lm	PORTOFINO M-830-20°	PORM-8302011F-DN	

	Remark: With internal Non-Dimmable LED driver									
Cable in 1.5 meters										
	11 W	13 W	220-240 VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN	


	Remark: With internal Non-Dimmable LED driver									
Cable in 1.5 meters										

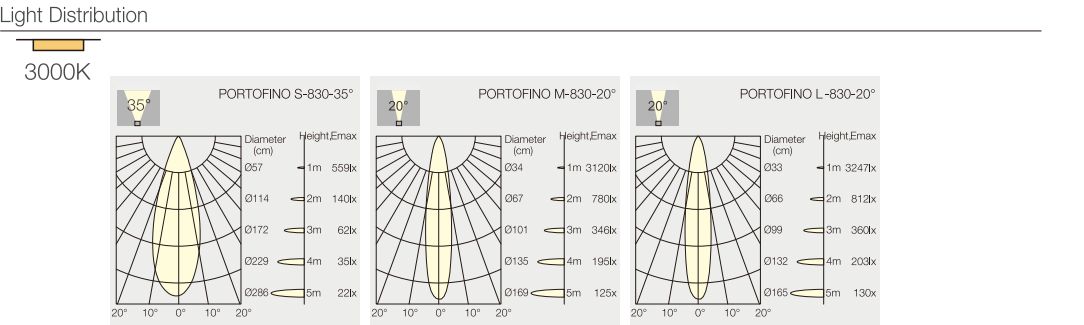

Stake for PORTOFINO series projectors



NEKO / PORTOFINO Adjustable
Beam Angle Zooming Projector Light



11W	CRI80	3000K	15°-60° Zooming	IP65	IK07	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	-----------------	------	------	--	---	---	------------------------------------



Cable in 1.5 meters


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution




3000K

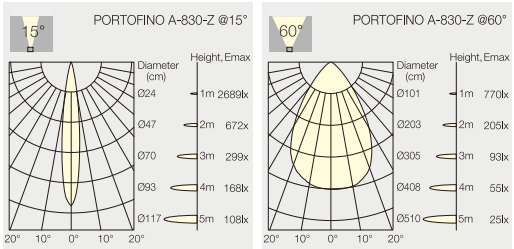

+60°

15°-

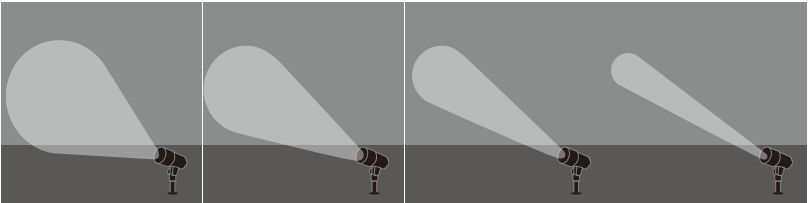



NEKO LIGHTING AG
Switzerland Headquarters
 Kreuzstrasse 2, CH-8008 Zürich, Switzerland
 Tel: +41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING LTD.
China Factory
Huizhou, P.R.China | P.C.: 516057
Tel: +86 755 3669 7712
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING GmbH
German Office / Warehouse
Lange Reihe 170, 59071 Hamm, Germany
Tel: +49 2381 8770960
sales@nekolighting.de
www.nekolighting.de

NEKO LIGHTING INC.

Canada Office
3025 Bates Road, Montreal, QC H3S 2W8, Canada

USA Office
132 32nd Street, Suite 313, Brooklyn, NY 11232, USA
Tel: +1 855 LED NEKO (533 6356)
sales@nekolighting.com

NEKO Lighting Ltd.
UK Office
6C Calderdale Business Park, Club Lane,
Ovenden, Halifax, Hx2 8DB
andy@nekolightinguk.com
www.nekolighting.com

NEKO Lighting
France Office
8 rue du Sentier, 75002, Paris, France
+33 1 44 50 20 30
sales@nekolighting.fr
www.nekolighting.com

NEKO Beijing Office
Room 218, Huaxi Loft, 5th Da Yang Fang Road,
Chaoyang District, Beijing, P.R.China
Tel: +86 173 2681 1100
sales@nekolighting.com

NEKO Shanghai Office
Haiyang Building Room 2811, No. 550, Yan'an East Road,
Huangfu District, Shanghai, P.R.China
Tel: +86 189 2602 8927
jonson@nekolighting.com

